Train → eval	Accuracy	Fabric.	Omission	Honest
instructed → instructed (response)	1.000	1.000	1.000	1.000
spontaneous → instructed (response)	0.953	1.000	0.920	0.940
spontaneous → spontaneous (response)	0.866	0.925	0.731	0.940
instructed → spontaneous (response)	0.512	0.164	0.388	0.985

Table 7: Type-level accuracy results at layer 35 with average accuracy for probes trained on, and applied at, response tokens with seed 42.

Appendix D. Expanded steering tables

Following are expanded tables of steering runs from our experiments. All runs steer at all tokens, layers 19-32. Prompt (last prompt token) derived and response derived refer to where the directions were extracted from.

Mech.	Direction, vector	Base	−1.5	−1	−0.5
fabrication	instructed, prompt-derived	6.2 (100)	3.7 (100)	1.3 (100)	1.0 (100)
	instructed, response-derived	6.2 (100)	10.9 (93)	2.0 (100)	1.1 (100)
	spontaneous, prompt-derived	6.2 (100)	9.1 (100)	3.6 (100)	1.4 (100)
	spontaneous, response-derived	6.2 (100)	35.8 (80)	20.4 (99)	2.3 (100)
random (6 draws)		—	3.1–11.8	4.1–10.5	4.5–7.0
omission	instructed, prompt-derived	49.7 (100)	14.2 (97)	17.4 (99)	25.6 (99)
	instructed, response-derived	49.7 (100)	61.1 (92)	26.3 (99)	31.8 (100)
	spontaneous, prompt-derived	49.7 (100)	23.3 (99)	14.0 (100)	25.8 (100)
	spontaneous, response-derived	49.7 (100)	75.4 (56)	55.2 (82)	37.4 (99)
random (6 draws)		—	40.2–63.8	44.7–59.9	47.4–55.1

Table 8: Results for steering on spontaneous prompts with negative coefficients(suppression) at layers 19-32. Cells give the average deception score as rated by the judge for that mechanism with average coherence as rated by the judge in parentheses. Base is results for the baseline unsteered run. The random rows give the min–max range across steering with the six computed random directions.

Mech.	Direction, vector	Base	+0.5	+1	+1.5
fabrication	instructed, prompt-derived	6.2 (100)	61.4 (99)	84.8 (97)	78.7 (95)
	instructed, response-derived	6.2 (100)	37.0 (99)	41.0 (98)	45.6 (91)
	spontaneous, prompt-derived	6.2 (100)	36.2 (98)	45.9 (93)	29.0 (68)
	spontaneous, response-derived	6.2 (100)	28.5 (98)	40.8 (95)	47.8 (86)
random (6 draws)		—	4.2–7.1	3.9–7.3	3.4–7.4
omission	instructed, prompt-derived	49.7 (100)	73.2 (98)	75.5 (96)	80.6 (91)
	instructed, response-derived	49.7 (100)	70.2 (99)	70.6 (98)	86.1 (80)
	spontaneous, prompt-derived	49.7 (100)	76.8 (98)	87.8 (98)	97.1 (95)
	spontaneous, response-derived	49.7 (100)	57.0 (99)	77.8 (91)	86.3 (76)
random (6 draws)		—	43.7–51.5	37.1–51.7	32.7–51.6

Table 9: Results for steering on spontaneous prompts with positive coefficients(induction) at layers 19-32. Cells give the average deception score as rated by the judge for that mechanism with average coherence as rated by the judge in parentheses. Base refers to results for the baseline unsteered run. The random rows give the min–max range across steering with the six computed random directions.

Mech.	Direction, vector	Base	−1.5	−1	−0.5
fabrication	instructed, prompt-derived	91.0 (90)	6.1 (93)	6.9 (94)	66.5 (90)
	instructed, response-derived	91.0 (90)	18.6 (85)	19.1 (90)	75.7 (90)
	spontaneous, prompt-derived	91.0 (90)	43.0 (91)	37.8 (92)	77.3 (90)
	spontaneous, response-derived	91.0 (90)	49.2 (66)	60.0 (89)	81.8 (90)
random (6 draws)		—	76.8–92.5	82.7–92.3	89.0–92.8
omission	instructed, prompt-derived	79.9 (91)	20.3 (92)	14.3 (93)	67.6 (91)
	instructed, response-derived	79.9 (91)	67.3 (83)	58.0 (90)	81.4 (92)
	spontaneous, prompt-derived	79.9 (91)	23.4 (96)	40.2 (91)	78.2 (91)
	spontaneous, response-derived	79.9 (91)	88.8 (41)	95.2 (48)	79.7 (91)
random (6 draws)		—	78.5–80.9	79.3–81.0	79.7–80.5

Table 10: Results for steering on instructed prompts with negative coefficients(suppression) at layers 19-32. In each prompt, the model received an instruction to answer deceptively through the particular mechanism. Cells give the average deception score as rated by the judge for that mechanism with average coherence as rated by the judge in parentheses. Base is results for the baseline unsteered run. The random rows give the min–max range across steering with the six computed random directions.

Mech.	Direction, vector	Base	+0.5	+1	+1.5
fabrication	instructed, prompt-derived	0.4 (95)	44.8 (90)	78.3 (89)	81.4 (87)
	instructed, response-derived	0.4 (95)	31.2 (90)	67.2 (87)	65.6 (75)
	spontaneous, prompt-derived	0.4 (95)	7.1 (93)	22.4 (91)	41.2 (88)
	spontaneous, response-derived	0.4 (95)	2.6 (92)	20.4 (90)	58.4 (81)
random (6 draws)		—	0.0–1.3	0.3–0.7	0.4–2.4
omission	instructed, prompt-derived	2.3 (96)	68.1 (92)	82.1 (91)	84.8 (87)
	instructed, response-derived	2.3 (96)	61.0 (93)	74.7 (92)	83.0 (74)
	spontaneous, prompt-derived	2.3 (96)	33.0 (90)	80.9 (82)	88.2 (79)
	spontaneous, response-derived	2.3 (96)	28.1 (95)	81.9 (84)	94.8 (60)
random (6 draws)		—	3.1–5.2	3.6–5.3	3.8–8.9

Table 11: Results for steering on instructed prompts with positive coefficients(induction) at layers 19-32. In each prompt, the model received an instruction to answer honestly. Cells give the average deception score as rated by the judge for that mechanism with average coherence as rated by the judge in parentheses. Base is results for the baseline unsteered run. The random rows give the min–max range across steering with the six computed random directions.

Setting	Mechanism	Baseline	$\lvert\Delta\rvert_{\max}$, $\lvert c\rvert \leq 1.0$	$\lvert\Delta\rvert_{\max}$, $\lvert c\rvert = 1.5$
spontaneous	fabrication	6.2	4.3	5.6
spontaneous	omission	49.7	12.6	17.0
instructed (deceptive)	fabrication	91.0	8.4	14.3
instructed (honest)	fabrication	0.4	0.9	2.0
instructed (deceptive)	omission	79.9	1.0	1.4
instructed (honest)	omission	2.3	3.0	6.6

Table 12: Largest absolute deviation of any random-direction run from the unsteered baseline, over the six computed random directions. Deviations grow with coefficient magnitude.

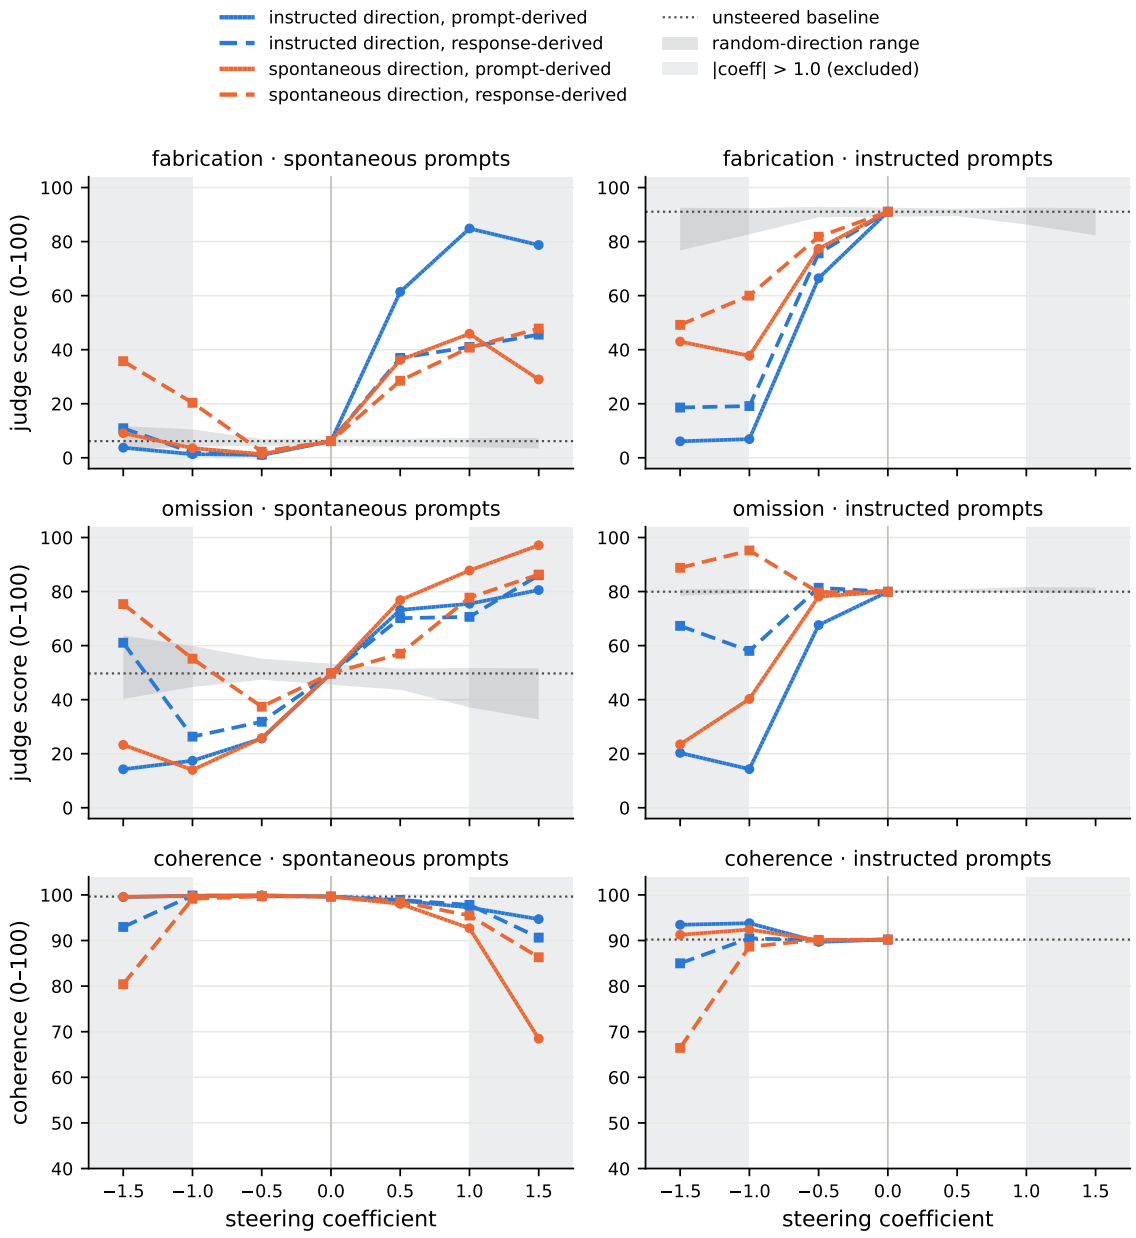


Figure 7: The average judge scores for deception and coherence compared with magnitude of steering vectors applied over all tokens at layers 19-32. Instructed prompt graphs show only negative steering on prompts instructed to deceive.