

## Ideation Phase

### Ideation

Date	15 October 15, 2022
Team ID	PNT2022TMID15957
Project Name	Real time -river water quality monitoring and control system
Maximum Marks	4 Marks

#### **Ideation phase:**

The main aim is to develop a system for continuous monitoring of riverwater quality at remote places using wireless sensor networks with low power consumption, low-cost and high detection accuracy.

pH, conductivity, turbidity level, etc are the limits that are analyzed to improve the water quality.

#### **Following are the aims of idea implementation:**

- (a) To measure water parameters such as pH, dissolved oxygen, turbidity, conductivity, etc. using available sensors at a remote place.
- (b) To assemble data from various sensor nodes and send it to the basestation by the wireless channel.
- (c) To simulate and evaluate quality parameters for quality control.
- (d) To send SMS to an authorized person routinely when water quality detected does not match the preset standards, so that, necessary actions can be taken.

#### **Control surface:**

An Arduino mega is utilized as a core person. The Arduino victimized here is mega 2560 because multiple analog sign sensors probe requisite to be conterminous with the Arduino inhabit. It has a set of registers that use as a solon use RAM. Specific intend to know registers for on-chip component resources are also mapped into the assemblage grapheme.

The addressability of store varies depending on instrumentation series and all PIC devices someone several banking mechanisms to utilise addressing to additional faculty.

Subsequent series of devices have move instructions which can covert move had to be achieved via the register. Thus the mechanism functions with the exploit of coding intrinsically in the Arduino UNO R3 skate.

**pH sensor:**

The pH of thing is a useful constant to display because graduate and lowpH levels can hump large effects on the author. The pH of a statement can grasp from 1 to 14. A pH sensor is an instrumentation that measuresthe hydrogen-ion density in a bleach, indicating its tartness alkalinity. Its constitute varies from 0 to 14 pH. Uttermost pH values

also process the solubility of elements and compounds making them cyanogenetic. Mathematically pH is referred as,  
$$\text{pH} = -\log [\text{H}^+].$$

**Turbidity sensor:**

- Turbidity train sensor is victimised to measure the clarity of element or muddiness utter in the water.
- The muddiness of the open cut food is ordinarily between 255 NTU. Irrigate is visibly at levels above 80 NTU. The standards
- for intemperance liquid is 130 NTU to 250 NTU. The turbidity device consists of soft sender and acquirer, the transmitter needs to transmit unsubtle bright, it is said to be turbid.
- The consequence of turbidity is a reduction in water clarity aesthetically unpleasant, decreases the rate of photosynthesis, increases water temperature.

**Temperature sensor:**

- Here DS18B20 is old as the temperature device. Usually, its present use to perceive the temperature of the life, if we site the device wrongthe conductor electrode and placed into the H<sub>2</sub>O, it can discover the temperature of H<sub>2</sub>O also.
- The normal temperature of the people is (25 -30)° C.

**LCD display:**

- LCD (Liquid Crystal Display) impede is a flat brace electronic exhibit power and finds in a countywide orbit of applications. A 16x2 LCD demo is the really fundamental power and is rattling commonly victimised in varied devices and circuits.
- These modules are desirable over heptad segments and otherwise multi-segment LEDs.

## **Wi-Fi module:**

- Wi-Fi or Wi-Fi is a subject for wireless localized area scheme with devices. Devices that can use Wi-Fi study permit private computers, video-game consoles, smartphones, digital cameras, paper computers, digital frequency players and ultramodern printers.
- Wi-Fi matched devices can insert to the Cyberspace via a LAN weband wireless make a bushel. Much a reach quantity (or point) has acapableness of around 20 meters (66 feet) indoors and a greater compass outdoors.
- Wi-Fi subject may be utilised to render the Internet reach to devices that are within the capability of a wireless meshwork that is connectedto the Internet.

## **Software design:**

The proposed water quality monitoring system based on WSN can be divided into three parts:

- IoT platform
- Neural network models in Big Data Analytics and water quality management
- Real-time monitoring of water quality by using IoT integrated Big Data Analytics

## **IoT Platform :**

- The quality parameters are labeled datasets including desired outputs of specific combination of inputs.
- The neural network will produce output to classify water quality as dangerous, be careful, and good. The classification layer will run on top of Hadoop cluster.
- The advantages of using neural network based analytics are like Artificial Neural Networks (ANNs) are good in learning and modeling non-linear relationships, and high volatile data. Though neural networks are prone to over fitting, the neural network model used in water quality monitoring system is not complex enough to cause over fitting problem. Also, there are many countermeasures to avoid over fitting. Also, computation overload is not going to delay the response of system as there are only a few water quality parameters.

## **Neural network models in Big Data Analytics and water quality management:**

- The use of artificial neural networks for the prediction of water quality parameters has already been investigated long before. Multi-layer neural network model is depicted below having five inputs In 1, In 2, In3, In 4, In 5 in input layer, a hidden layer with four neurons and three neurons in output layer.
- There are two bias input neuron connected to hidden layer neurons and output layer neurons.
- In the neural network model 5 inputs can be pH value, temperature, turbidity, ORP, and conductivity and 3 outputs will be dangerous, be careful, and good.
- Before training the neural network model few other parameters need to be set; as for example: Learning rate = 0.01, Learning algorithm = Back Propagation, Bias input = 1, Connection weights = randomly assigned, Activation function = sigmoid function.
- The output of sigmoid function neuron with inputs:  $X_j$ , weights:  $W_j$  and bias  $b$  is :
- $F(X) = 1 / (1 + \exp(-\sum_j w_j x_j - b))$

## **Real-time monitoring of water quality by using IoT integrated Big Data Analytics:**

- IoT devices use various types of sensors to collect data about turbidity, ORP, temperature, pH, conductivity, etc. of river water continuously. Also, IoT the array of collected data wirelessly to the remote Data Aggregator Server in the cloud.
- Moreover, the volume of semi structured data increases with time in such a velocity that only the Big Data Analytics applications can efficiently store and analyze the data constantly. The system should be reliable and scalable.
- So, data management layer will be deployed and operational on the Apache Hadoop cluster. Hadoop helps distributed storing and processing of big data across cluster of computers. Also, such operational environment is horizontally scalable i.e. nodes or computers can be added to a cluster later while volume and velocity of data streaming will be increasing.
- Hadoop cluster is fault tolerant as jobs are redirected automatically to the running nodes when nodes are failed.
- The data in Hadoop is highly available as multiple copies of data are stored in data nodes managed by name node, standby name node, journal nodes and fail over controller.

- IoT applications need high speed of read/write of data and highly available data in the database. So, the system will use Apache HBaseNoSQL database to store big data as HBase runs on top of Hadoop. Hence, the data is distributed across Hadoop distributed file system (HDFS).
- Besides, HBase is capable of executing real-time queries as well as batch processing. High-availability of data is provided by the HBase as it is stored in HDFS. Hadoop clusters are spanning over many servers which are managed by Apache ZooKeeper. Such centralized management of the cluster is required to provide cross-node synchronization services and configuration management. Applications can create znode (a file which persists the state of the cluster in the memory) in zookeeper.
- Nodes will register to znode to synchronize task executions across the cluster by sharing and updating status changes in nodes through the use of zookeeper znode.
- Apache HBase is managed by Apache ZooKeeper.
- The IoT application will help the users to visualize the water quality analysis results produced by the data management layer over different time series continuously.
- The data visualization application runs on client devices such as Smart phones, laptops and desktops. The root users will be able to generate daily/monthly/yearly water quality report from data management layer and visualize in the client devices.





## Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

10 minutes to prepare  
1 hour to collaborate  
2-8 people recommended

Share template feedback



### Before you collaborate

A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

10 minutes

- A** Team gathering  
Define who should participate in the session and send an invite. Share relevant information or pre-work ahead.
  - B** Set the goal  
Think about the problem you'll be focusing on solving in the brainstorming session.
  - C** Learn how to use the facilitation tools  
Use the Facilitation Superpowers to run a happy and productive session.
- Open article →



### Define your problem statement

What problem are you trying to solve? Frame your problem as a How Might We statement. This will be the focus of your brainstorm.

5 minutes

**PROBLEM**  
How might we [your problem statement]?




### Brainstorm


Write down any ideas that come to mind that address your problem statement.

10 minutes

ROSINI M




POOVITHA K




POOJA SHREE P S

Very useful in purifying the water mainly in urban areas

PRANIKAA V



PRADEEPA T




**TIP**  
You can select a sticky note and hit the pencil (switch to sketch) icon to start drawing!



### Group ideas

Take turns sharing your ideas while clustering similar or related notes as you go. Once all sticky notes have been grouped, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you can break it up into smaller sub-groups.


20 minutes

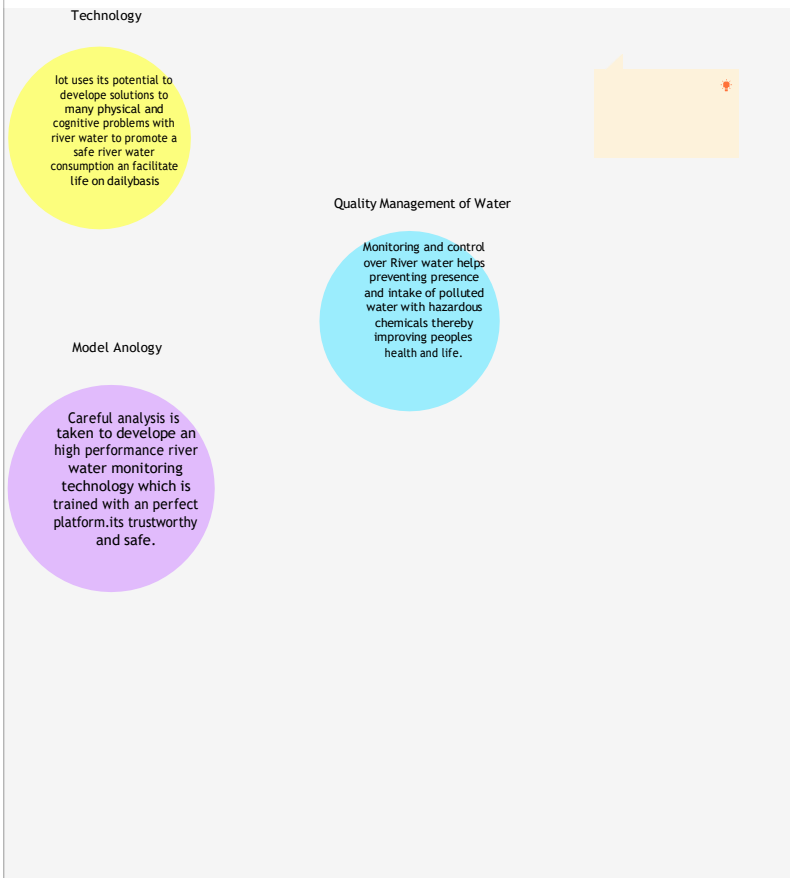

### Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

20 minutes

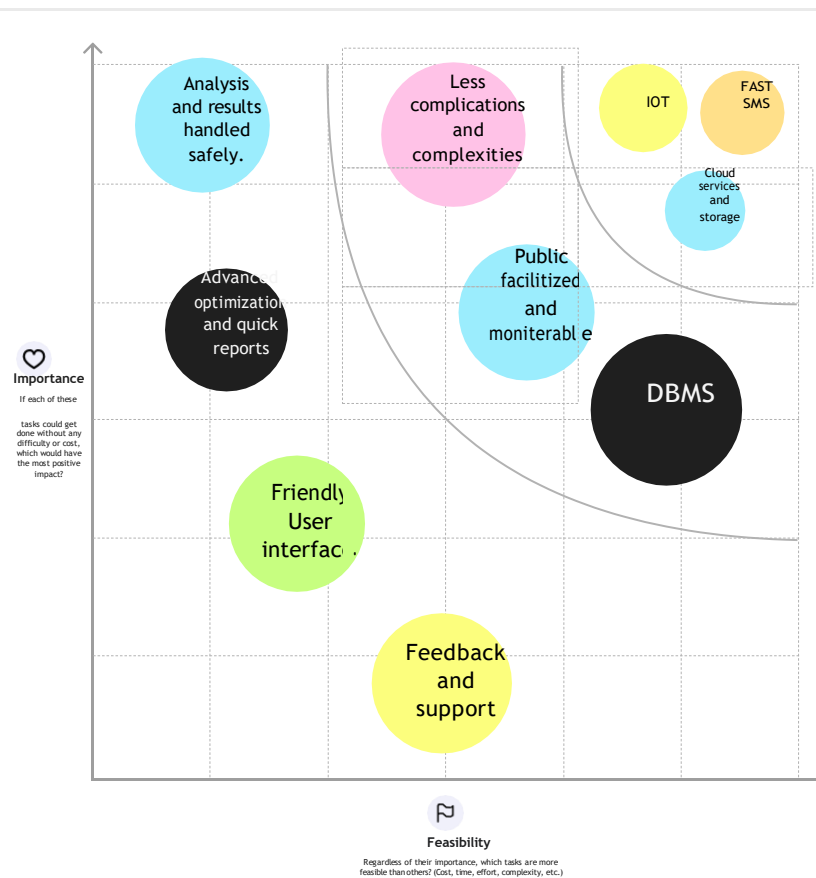

### After you collaborate

You can export the mural as an image or pdf to share with members of your company who might find it helpful.


#### Quick add-ons

- A** Share the mural  
Share a view link to the mural with stakeholders to keep them in the loop about the outcomes of the session.
- B** Export the mural  
Export a copy of the mural as a PNG or PDF to attach to emails, include in slides, or save in your drive.

#### Keep moving forward

- Strategy blueprint**  
Define the components of a new idea or strategy.  
Open the template →
- Customer experience Journey map**  
Understand customer needs, motivations, and obstacles for an experience.  
Open the template →
- Strengths, weaknesses, opportunities & threats**  
Identify strengths, weaknesses, opportunities, and threats (SWOT) to develop a plan.  
Open the template →

Share template feedback



**Need some inspiration?**  
See a finished version of this template to kickstart your work.  
Open example

