

IoT BASED SMART FARMING – ASSIGNMENT 4

SUBMITTED BY SANGEETHA V P (113219031129)

BACHELOR OF ENGINEERING IN COMPUTER SCIENCE AND ENGINEERING

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

CODE:

main.ino:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "niry5c"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "123456789" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
```

```

digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{"Distance\":";
payload += dist;
payload += ", \"ALERT!!\":"; payload += "\"Distance less than 100cms\":";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
}
initManagedDevice();
Serial.println();
}
}

```

```

void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: " + data3);
  data3="";
}

```

diagram.json:

```

{
  "version": 1,
  "author": "Sangeetha",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 19.96, "left": 88.5, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],

```

```

[ "esp:RX0", "$serialMonitor:TX", "", [] ],
[
  "esp:VIN",
  "ultrasonic1:VCC",
  "red",
  [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
],
[ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
[ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
[ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
]
}

```


libraries.txt:

Wokwi Library List

See <https://docs.wokwi.com/guides/libraries>

PubSubClient

Circuit Diagram:

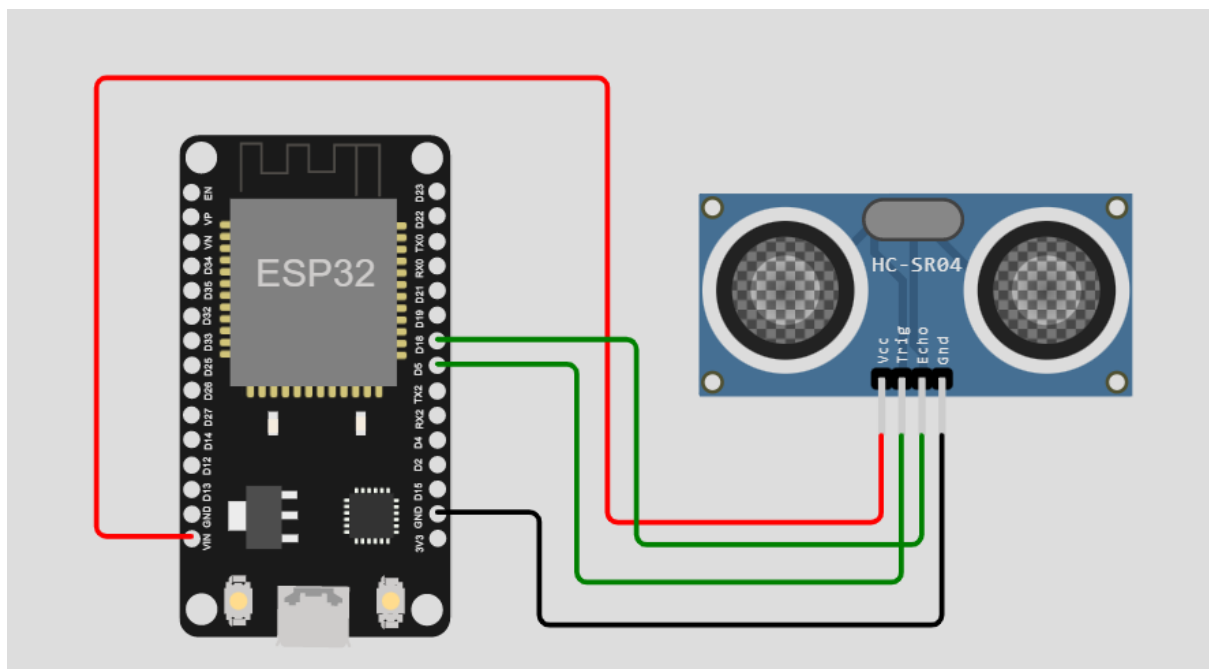

Wokwi Output:

```
Connecting to ...
WiFi connected
IP address:
10.10.0.2
Reconnecting client to niry5c.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
```

IBM Cloud Output:

Browse

Action

Device Types

Interfaces

Add Device

Identity

Device Information

Recent Events

State

Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago

Wokwi Simulation Link:

<https://wokwi.com/projects/348770205975970387>