
SMART Home Circuit Connection:

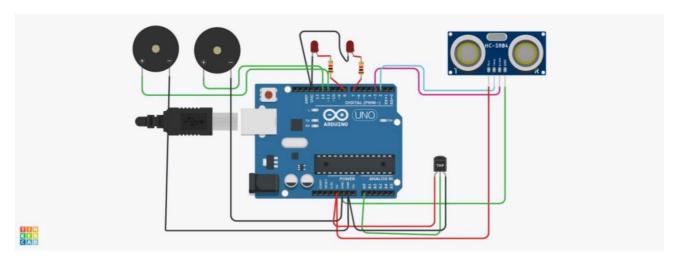

Components Used:

- i)2 Piezo Buzzers
- ii)Temperature Sensor
- iii)Ultrasonic Sensor
- iv)LED -2
- v)Resistor-2

Code:

```
int t=2;
int e=3;

void setup()
{
    Serial.begin(9600);
    pinMode(t,OUTPUT);
    pinMode(e,INPUT);
    pinMode(12,OUTPUT);
}

void loop()
{
    //ultrasonic sensor
    digitalWrite(t,LOW);
```

```
digitalWrite(t,HIGH);
delayMicroseconds(10);
digitalWrite(t,LOW);
float dur=pulseIn(e,HIGH);
float dis=(dur*0.0343)/2;
Serial.print("Distance is: ");
Serial.println(dis);
 //LED ON
if(dis>=100)//(in terms of centimeter)
 digitalWrite(8,HIGH);
 digitalWrite(7,HIGH);
//Buzzer For ultrasonic Sensor
if(dis>=100)
for(int i=0; i<=30000; i=i+10)
tone(12,i);
delay(1000);
noTone(12);
delay(1000);
//Temperate Sensor
double a= analogRead(A0);
double t=(((a/1024)*5)-0.5)*100;
Serial.print("Temp Value: ");
Serial.println(t);
delay(1000);
//LED ON
if(t>=100)//(in terms of celsius)
 digitalWrite(8,HIGH);
```

```
digitalWrite(7,HIGH);
 }
/Buzzer for Temperature Sensor
if(t>=100)
 for(int i=0; i<=30000; i=i+10)
 {
 tone(12,i);
 delay(1000);
 noTone(12);
 delay(1000);
 }
 }
 //LED OFF
 if(t<100)
 {
  digitalWrite(8,LOW);
  digitalWrite(7,LOW);
  }
 }
```