### **Assignment-4**

| Team ID             | PNT2022TMID07710 |
|---------------------|------------------|
| Assignment Date     | 30 October 2022  |
| Student Name        | Karthi S         |
| Student Roll Number | 6123201914006    |
| Maximum Marks       | 2 Marks          |

#### **Question:**

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
#define ORG "3r9a6j"//IBM ORGANITION ID
#define DEVICE TYPE "ESP32"//Device type mentioned in ibm watson IOT
//Platform
#define DEVICE ID "05112001"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "(B?B-h@zQD&70xTBOj" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 18;
const int echoPin = 5;
#define SOUND SPEED 0.034
```


```
long duration;
float distance;
void setup() {
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)</pre>
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
```

```
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
void mgttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
initManagedDevice();
Serial.println();
void wificonnect()
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
```

```
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: "+ data3);
    data3="";
}</pre>
```

## **Circuit Diagram:**

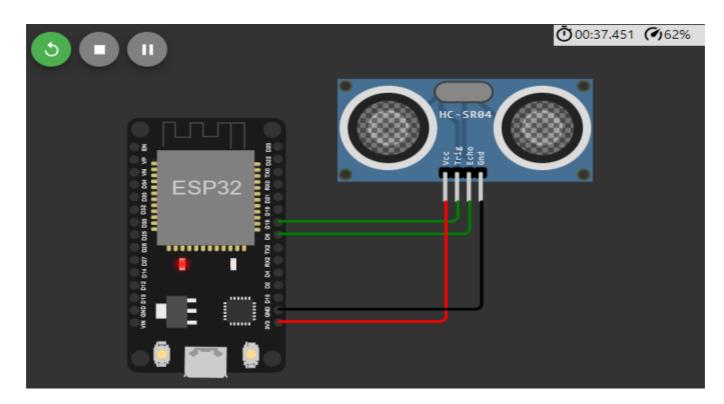

## **Output:**

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.92
```

# IBM cloud output:

