

Write Code and connections in wokwi for ultrasonic sensor. whatever distance is less than 100 cms send “Alert” to ibm cloud aand display in device recent events.

Code

```
//Pins

const int TRIG_PIN = 7 ; const
int ECHO_PIN = 8;

//Anything over 400 cm (23200 us pulse) is "out of range" const
unsigned int MAX_DIST = 23200;

void setup() {

// The Trigger pin will tell the sensor to range find
Pin Mode(TRIG_PIN, OUTPUT); digital
Write(TRIG_PIN, LOW);

//Set Echo pin as input to measure the duration of
//pulses coming back from the distance sensor
pinMode(ECHO_PIN, INPUT ) ;

// We'll use the serial monitor to view the sensor output
Serial.begin(9600);
}

void loop() { unsigned
long t1; unsigned
```

```

long t2; unsigned
long pulse_width;
float cm; float
inches;

// Hold the trigger pin high for at least 10 us
digitalWrite(TRIG_PIN, HIGH);
delayMicroseconds(10);
digitalWrite(TRIG_PIN, LOW);

// Wait for pulse on echo pin while
(digitalRead( ECHO_PIN )==0 );

// Measure how long the echo pin was held high (pulse width)
// Note: the micros() counter will overflow after-70 min  t1=
micros ();
while (digitalRead(ECHO_PIN) == 1);
t2= micros ();  pulse_width = t2-t1;

// Calculate distance in centimeters and inches. The constants
//are found in the datasheet, and calculated from the assumed speed
// of sound in air at sea level (- 340m/s)
cm=pulse_Width / 58 ;  inches =
pulse_width/148.0;

//  Print  out  results  if
(pulse_width >MAX _ DIST ){


```

```
Serial.println("Out of range");
} else {
Serial.println("*****");
Serial.print("The Measured Distance in cm: ");
Serial.println(cm);


if( cm < 100 ){
    //while(true){
        Serial.println("Alert!!");
        //}
    }
Serial.print("*****");
}
//wait at least 1000ms before next measurement
Delay(1000);
}
```

Output:

1.If the distance is less than 100 centimeters,it alerts.

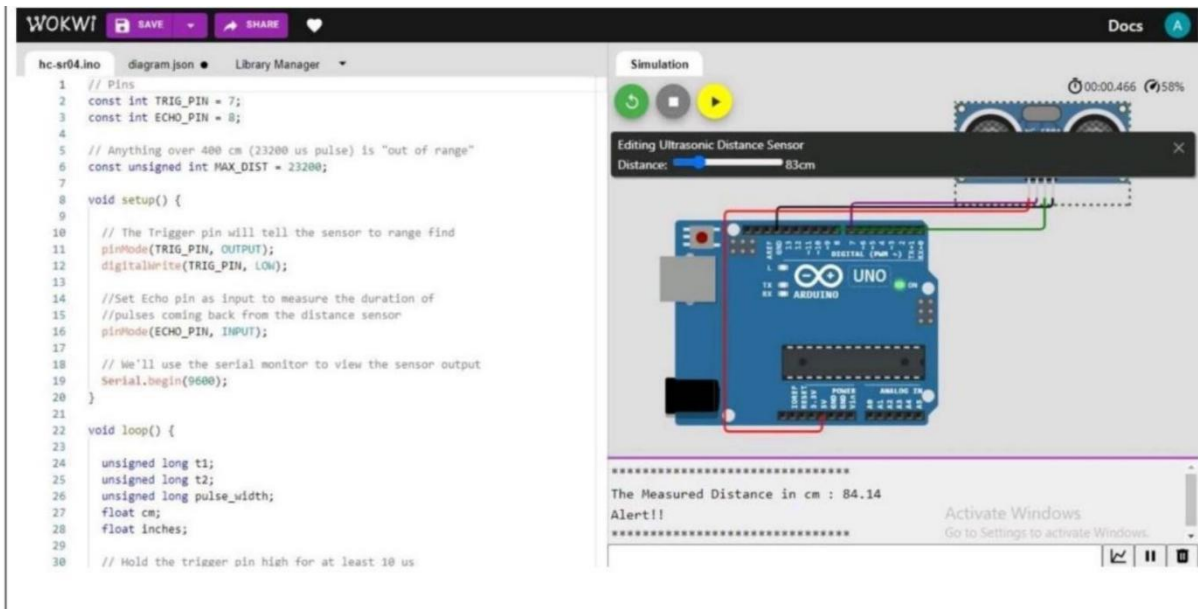

2.If the distance is more than 100 centimeters,it won't alert

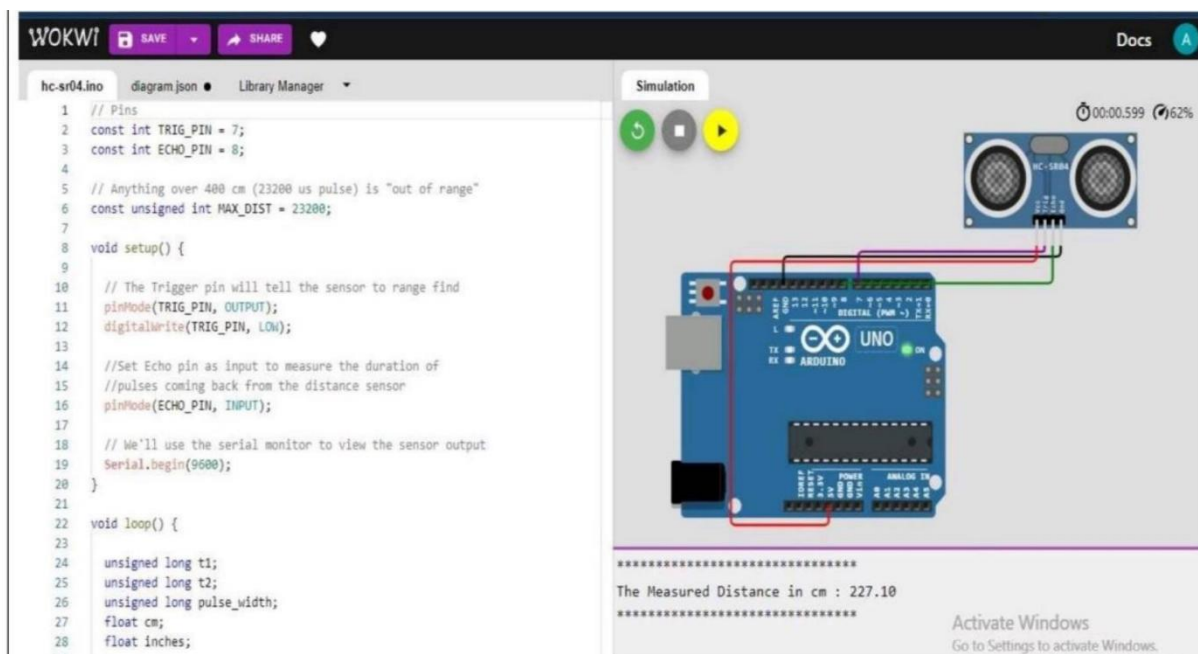

3.Simulation and Code execution

