

#### ASSIGNMENT-4

Assignment Date	21 November 2022
Student Name	V.Logesh
Student Roll Number	73151921027
Maximum Marks	2 Marks

#### QUESTION-1:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "1bklkq"
#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd.1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";
long duration;
int dist;
void setup() {
  Serial.begin(115200);
```

```

pinMode(trigpin, OUTPUT);
pinMode(echopin, INPUT);
wifiConnect();
mqttConnect();
}

void loop() {
publishData();
delay(500);
if (!client.loop()) {
mqttConnect();
}
}

void wifiConnect() {
Serial.print("Connecting to "); Serial.print("Wifi");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}

void mqttConnect() {
if (!client.connected()) {
Serial.print("Reconnecting MQTT client to "); Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(1000);
}
initManagedDevice();
Serial.println();
}
}

void initManagedDevice() {
if (client.subscribe(topic)) {
Serial.println(client.subscribe(topic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}

void publishData()
{
digitalWrite(trigpin, LOW);
digitalWrite(trigpin, HIGH);
delayMicroseconds(10);
digitalWrite(trigpin, LOW);
}

```

```

duration=pulseIn(echopin,HIGH);
dist=duration*speed/2;
if(dist<100){
    dist=100-dist;
    icon="fa-trash";
}
else{
    dist=0;
    icon="fa-trash-o";
}
DynamicJsonDocument doc(1024);
String payload;
doc["Name"]=name;
doc["Latitude"]=lat;
doc["Longitude"]=lon;
doc["Icon"]=icon;
doc["FillPercent"]=dist;
serializeJson(doc, payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
} else {
    Serial.println("Publish FAILED");
}
}

```

**OUTPUT:**


WOKWI

sketch.ino • diagram.json • libraries.txt • Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wifiClient;
6
7 #define ORG "1bklkq"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
13 char publishTopic[] = "iot-2/evt/abcd.1/fmt/json";
14 char topic[] = "iot-2/cmd/home/fmt/String";
15 char authMethod[] = "use-token-auth";
16 char token[] = TOKEN;
17 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
18 PubSubClient client(server, 1883, wifiClient);
19 void publishData();
20
21 const int trigpin=5;
22 const int echopin=18;
23 String command;
24 String data="";
25 String lat="14.167589";
26 String lon="80.248510";
27 String name="point2";
28 String icon="";
29 long duration;
30 int dist;
31 void setup() {
```

Simulation

00:03.813 99%

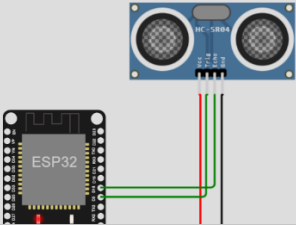

Connecting to Wifi..WiFi connected, IP address: 10.10.0.2  
Reconnecting MQTT client to 1bklkq.messaging.internetofthings.ibmcloud.com  
1  
subscribe to cmd OK


WOKWI

sketch.ino • diagram.json • libraries.txt • Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wifiClient;
6
7 #define ORG "1bklkq"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
13 char publishTopic[] = "iot-2/evt/abcd.1/fmt/json";
14 char topic[] = "iot-2/cmd/home/fmt/String";
15 char authMethod[] = "use-token-auth";
16 char token[] = TOKEN;
17 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
18 PubSubClient client(server, 1883, wifiClient);
19 void publishData();
20
21 const int trigpin=5;
22 const int echopin=18;
23 String command;
24 String data="";
25 String lat="14.167589";
26 String lon="80.248510";
27 String name="point2";
28 String icon="";
29 long duration;
30 int dist;
31 void setup() {
```



Simulation

00:06.228 99%

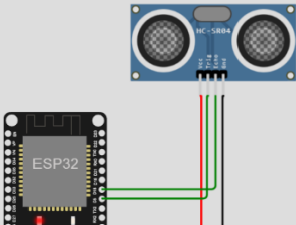

subscribe to cmd OK

Sending payload:  
{ "Name": "point2", "Latitude": "14.167589", "Longitude": "80.248510", "Icon": "fa-trash-o", "FillPercent": 0 }  
Publish OK

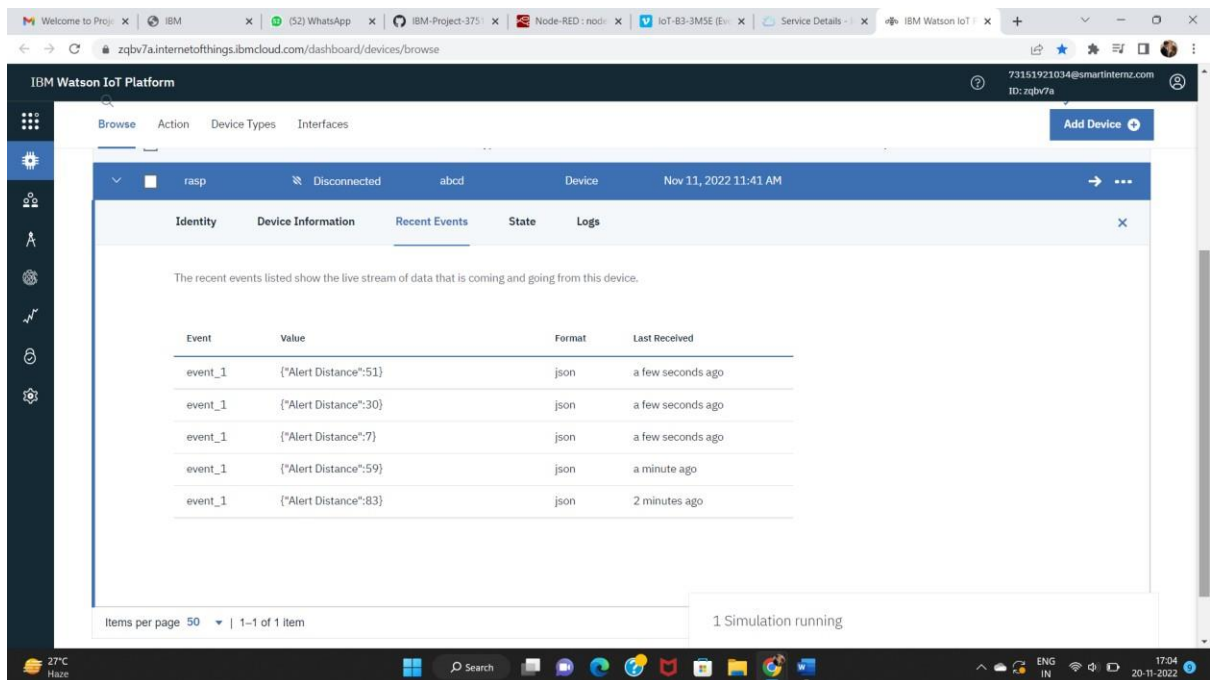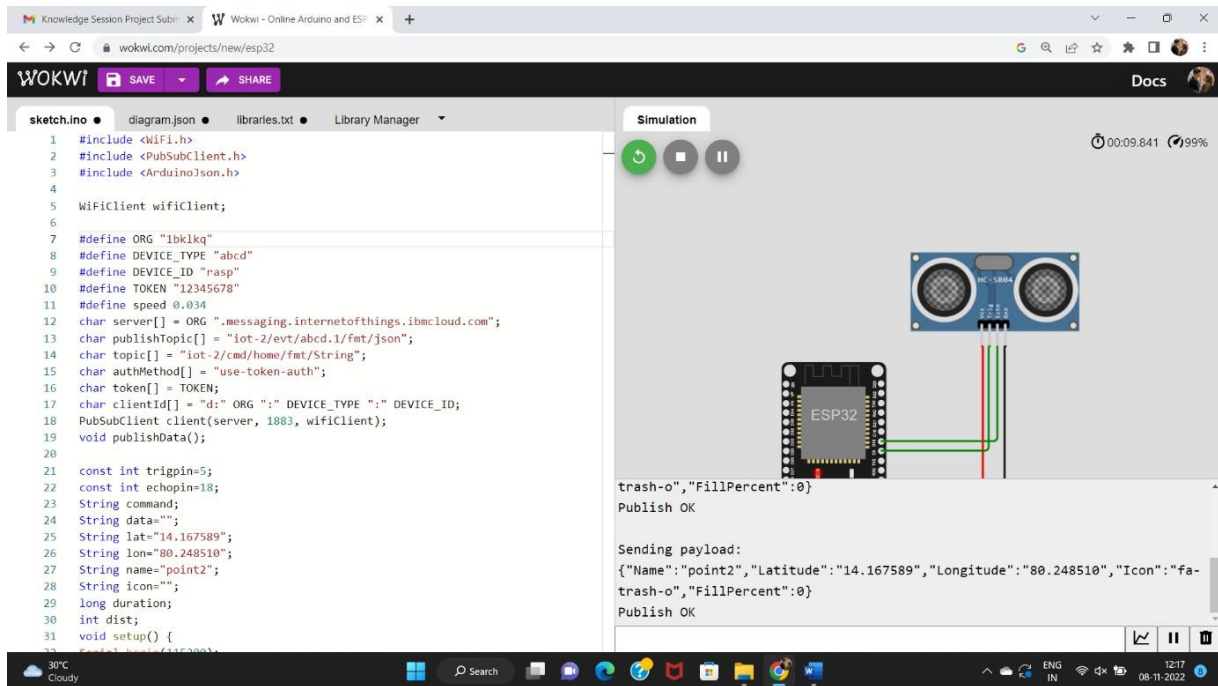

<https://wokwi.com/projects/347740509821731410>