Assignment -4

ASSIGNMENT DATE	31 OCT 2022
STUDENT NAME	SABARIDHARAN R
STUDENT ROLL NUMBER	910019104035
MAXIMUM MARK	2 MARKS

Question:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

Code:

```
#include <Wifi.h>
#include<PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
//----credentials of IBM Accounts-----
#define ORG "kotoq5
"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"
//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"
//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678"
//Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
```


```
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED
0.034 long duration;
float distance;
void setup()
{
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
```

```
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist)
{
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str()))
{
Serial.println("Publish ok");
}
Else
{
Serial.println("Publish failed");
}
}
void mqttconnect()
```

```
{
if (!client.connected())
{
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token))
{ Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED)
{
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice()
```

```
{
if (client.subscribe(subscribetopic))
{
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
}
else
{
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3=""; } Diagram.json:
{
"version": 1,
"author": "sweetysharon",
"editor": "wokwi",
"parts": [
{ "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
{ "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
```

Circuit Diagram:

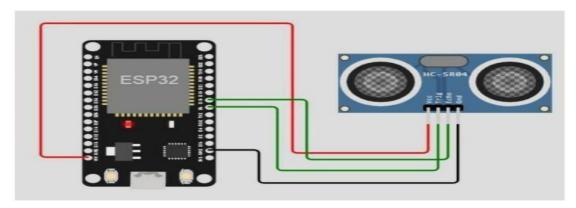

Output:

Wokwi output:

```
Connecting to ...
Wifi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
```

IBM cloud output:

