Develop A Python Script To Publish And Subscribe To IBM IoT Platform

Project Title	SmartFarmer – IoT Enabled Smart Farming
	Application
Team ID	PNT2022TMID19620
Content	Python Script


Python Code:


```
import time
import sys
import ibmiotf.application
import ibmiotf.device
import random
#Provide vour IBM Watson
organization = "x0fxss" #replace the ORG ID
deviceType = "Testing"#replace the Device type wi
deviceId = "Testdevice1"#replace Device ID
authMethod = "token"
authToken = "123456789" #Replace the authtoken
# Initialize GPTO
#Receives Command from Node-red
def myCommandCallback(cmd):
    print ("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']
    if status=="motoron":
        print ("motor is on")
    elif status == "motoroff" :
        print ("motor is off")
    elif status == "motor30" :
        print ("motor is on for 30 minutes")
try:
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method": authMethod, "auth-token":
authToken}
    deviceCli = ibmiotf.device.Client(deviceOptions)
```

```
except Exception as e:
    print("Caught exception connecting device: %s" % str(e))
    svs.exit()
# Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting" 10 times
deviceCli.connect()
while True:
        #Get Sensor Data from DHT11
        temp=random.randint(0,100)
        Humid=random.randint(0,100)
        soilmoisture=random.randint(0,100)
        data = { 'temp' : temp, 'Humid': Humid, 'soilmoisture': soilmoisture }
        #print data
        def myOnPublishCallback():
            print ("Published Temperature = %s C" % temp, "Humidity = %s %%" % Humid, "soilmoisture = %s %%"
%soilmoisture, "to IBM Watson")
        success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0, on publish=myOnPublishCallback)
        if not success:
            print("Not connected to IoTF")
        time.sleep(5)
        deviceCli.commandCallback = myCommandCallback
# Disconnect the device and application from the cloud
deviceCli.disconnect()
```

OUTPUT:

```
2022-11-11 15:56:49,907 ibmiotf.device.Client INFO Connected successfully: d:x0fxss:Testing:Testdevicel
Published Temperature = 8 C Humidity = 44 % soilmoisture = 3 % to IBM Watson
Published Temperature = 13 C Humidity = 95 % soilmoisture = 43 % to IBM Watson
Published Temperature = 78 C Humidity = 83 % soilmoisture = 83 % to IBM Watson
Published Temperature = 100 C Humidity = 52 % soilmoisture = 60 % to IBM Watson
Published Temperature = 45 C Humidity = 93 % soilmoisture = 16 % to IBM Watson
Published Temperature = 53 C Humidity = 12 % soilmoisture = 59 % to IBM Watson
Published Temperature = 15 C Humidity = 49 % soilmoisture = 32 % to IBM Watson
Published Temperature = 37 C Humidity = 73 % soilmoisture = 25 % to IBM Watson
```

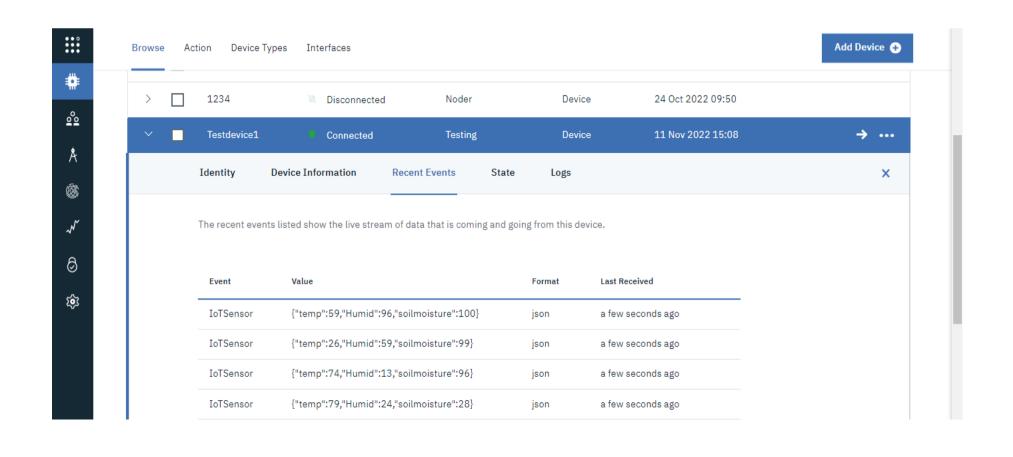

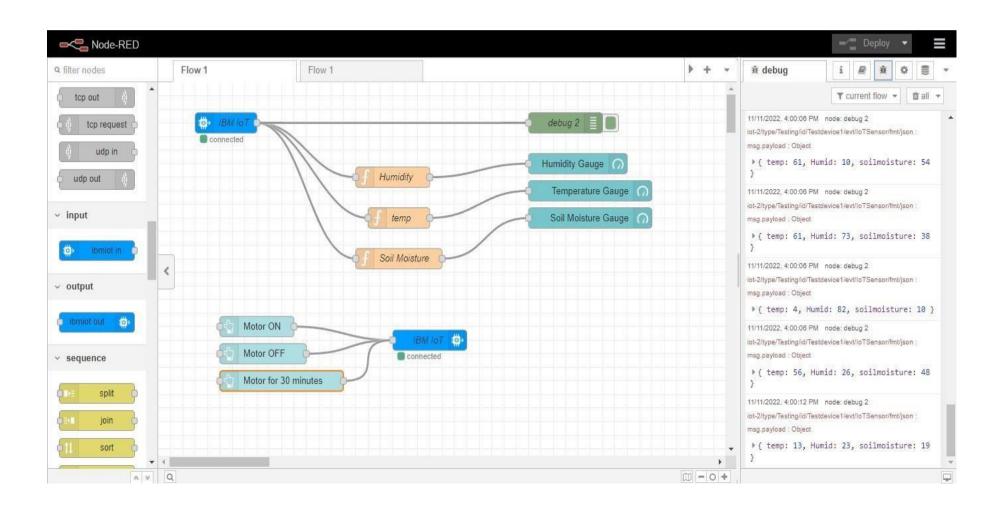

≡ Testing Home Default ▲ Group 2 Soil Moisture Gauge MOTOR ON MOTOR OFF MOTOR FOR 30 MINUTES Temperature Gauge 38 **Humidity Gauge**

```
Published Temperature = 25 C Humidity = 32 % soilmoisture = 86 % to IBM Watson
Published Temperature = 27 C Humidity = 16 % soilmoisture = 26 % to IBM Watson
Command received: motoron
motor is on
Command received: motoron
motor is on
Published Temperature = 10 C Humidity = 69 % soilmoisture = 82 % to IBM Watson
Published Temperature = 75 C Humidity = 37 % soilmoisture = 2 % to TBM Watson
Published Temperature = 63 C Humidity = 59 % soilmoisture = 11 % to IBM Watson
Published Temperature = 31 C Humidity = 20 % soilmoisture = 43 % to IBM Watson
Published Temperature = 47 C Humidity = 38 % soilmoisture = 95 % to IBM Watson
Published Temperature = 62 C Humidity = 5 % soilmoisture = 93 % to IBM Watson
Command received: motoroff
motor is off
Command received: motor30
motor is on for 30 minutes
Published Temperature = 19 C Humidity = 99 % soilmoisture = 96 % to IBM Watson
Published Temperature = 6 C Humidity = 56 % soilmoisture = 85 % to IBM Watson
```