

## **Sprint-4**

<b>Team ID</b>	<b>PNT2022TMID07525</b>
<b>Project name</b>	<b>Smart farmer-lot enabled smart farming application</b>

## Receiving commands from IBM cloud using Python program

```
import time
import sys
import ibmiotf.application
import ibmiotf.device
import random
```

### #Provide your IBM Watson Device Credentials

```
organization = "157uf3"
deviceType = "abcd"
deviceId = "7654321"
authMethod = "token"
authToken = "87654321"
```

### # Initialize GPIO

```
def myCommandCallback(cmd):
    print("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']
    if status=="motoron":
        print ("motor is on")
    elif status == "motoroff":
        print ("motor is off")
    else :
        print ("please send proper command")
```

```
try:
```

```
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
```

```
    deviceCli = ibmiotf.device.Client(deviceOptions)
```

```
    #.....
```

except Exception as e:

print("Caught exception connecting device: %s" % str(e))

sys.exit()

# Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting" 10 times deviceCli.connect()

while True:

#Get Sensor Data from DHT11

temp=random.randint(90,110)

Humid=random.randint(60,100)

Mois=random. Randint(20,120)

data = { 'temp' : temp, 'Humid': Humid ,

'Mois': Mois}

#print data def

myOnPublishCallback():

print ("Published Temperature = %s C" % temp, "Humidity = %s %" % Humid, "Moisture =%s deg c" % Mois "to IBM Watson")

success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0, on\_publish=myOnPublishCallback) if not success:

print("Not connected to IoT")

time.sleep(10)

deviceCli.commandCallback = myCommandCallback #

Disconnect the device and application from the cloud

deviceCli.disconnect()

```
ibmiotpublishsubscribe.py - C:\Users\ELCOT\Downloads\ibmiotpublishsubscribe.py (3.7.0)
File Edit Format Run Options Window Help

import time
import sys
import ibmiotf.application
import ibmiotf.device
import random


#Provide your IBM Watson Device Credentials
organization = "157uf3"
deviceType = "abcd"
deviceId = "7654321"
authMethod = "token"
authToken = "87654321"

# Initialize GPIO
def myCommandCallback(cmd):
    print("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']
    if status=="motoron":
        print ("motor is on")
    elif status == "motoroff":
        print ("motor is off")
    else :
        print ("please send proper command")

try:
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method": authMe
    deviceCli = ibmiotf.device.Client(deviceOptions)
    #.....
Ln 22 Col 21
```

```
Python 3.7.0 Shell
File Edit Shell Debug Options Window Help
Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:\Users\ELCOT\Downloads\ibmiotpublishsubscribe.py =====
2022-11-07 20:01:24,074 ibmiotf.device.Client INFO Connected successfully: d:157uf3:abcd:7654321
Published Moisture = 90 deg C Temperature = 96 C Humidity = 76 % to IBM Watson
Published Moisture = 102 deg C Temperature = 110 C Humidity = 68 % to IBM Watson
Published Moisture = 45 deg C Temperature = 99 C Humidity = 100 % to IBM Watson
Command received: motoron
motor is on
Published Moisture = 77 deg C Temperature = 91 C Humidity = 85 % to IBM Watson
Published Moisture = 73 deg C Temperature = 94 C Humidity = 86 % to IBM Watson
Command received: motoroff
motor is off
Published Moisture = 101 deg C Temperature = 104 C Humidity = 87 % to IBM Watson
```


## Flow Chart

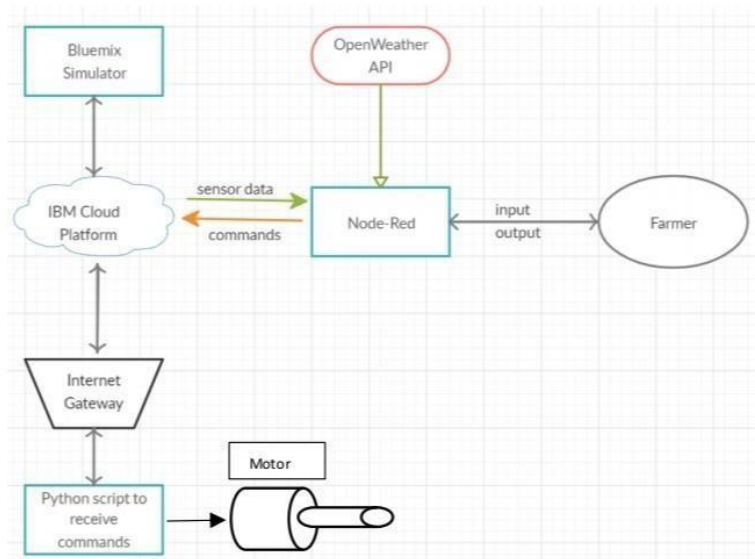

## Observations & Results

```
Python 3.7.0 Shell
File Edit Shell Debug Options Window Help
Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:\Users\ELCOT\Downloads\ibmiotpublishsubscribe.py =====
2022-11-07 20:01:24,074 ibmiotf.device.Client INFO Connected successfully: d:157uf3:abcd:7654321
Published Moisture = 90 deg C Temperature = 96 C Humidity = 76 % to IBM Watson
Published Moisture = 102 deg C Temperature = 110 C Humidity = 68 % to IBM Watson
Published Moisture = 45 deg C Temperature = 99 C Humidity = 100 % to IBM Watson
Command received: motoron
motor is on
Published Moisture = 77 deg C Temperature = 91 C Humidity = 85 % to IBM Watson
Published Moisture = 73 deg C Temperature = 94 C Humidity = 86 % to IBM Watson
Command received: motoroff
motor is off
Published Moisture = 101 deg C Temperature = 104 C Humidity = 87 % to IBM Watson
```



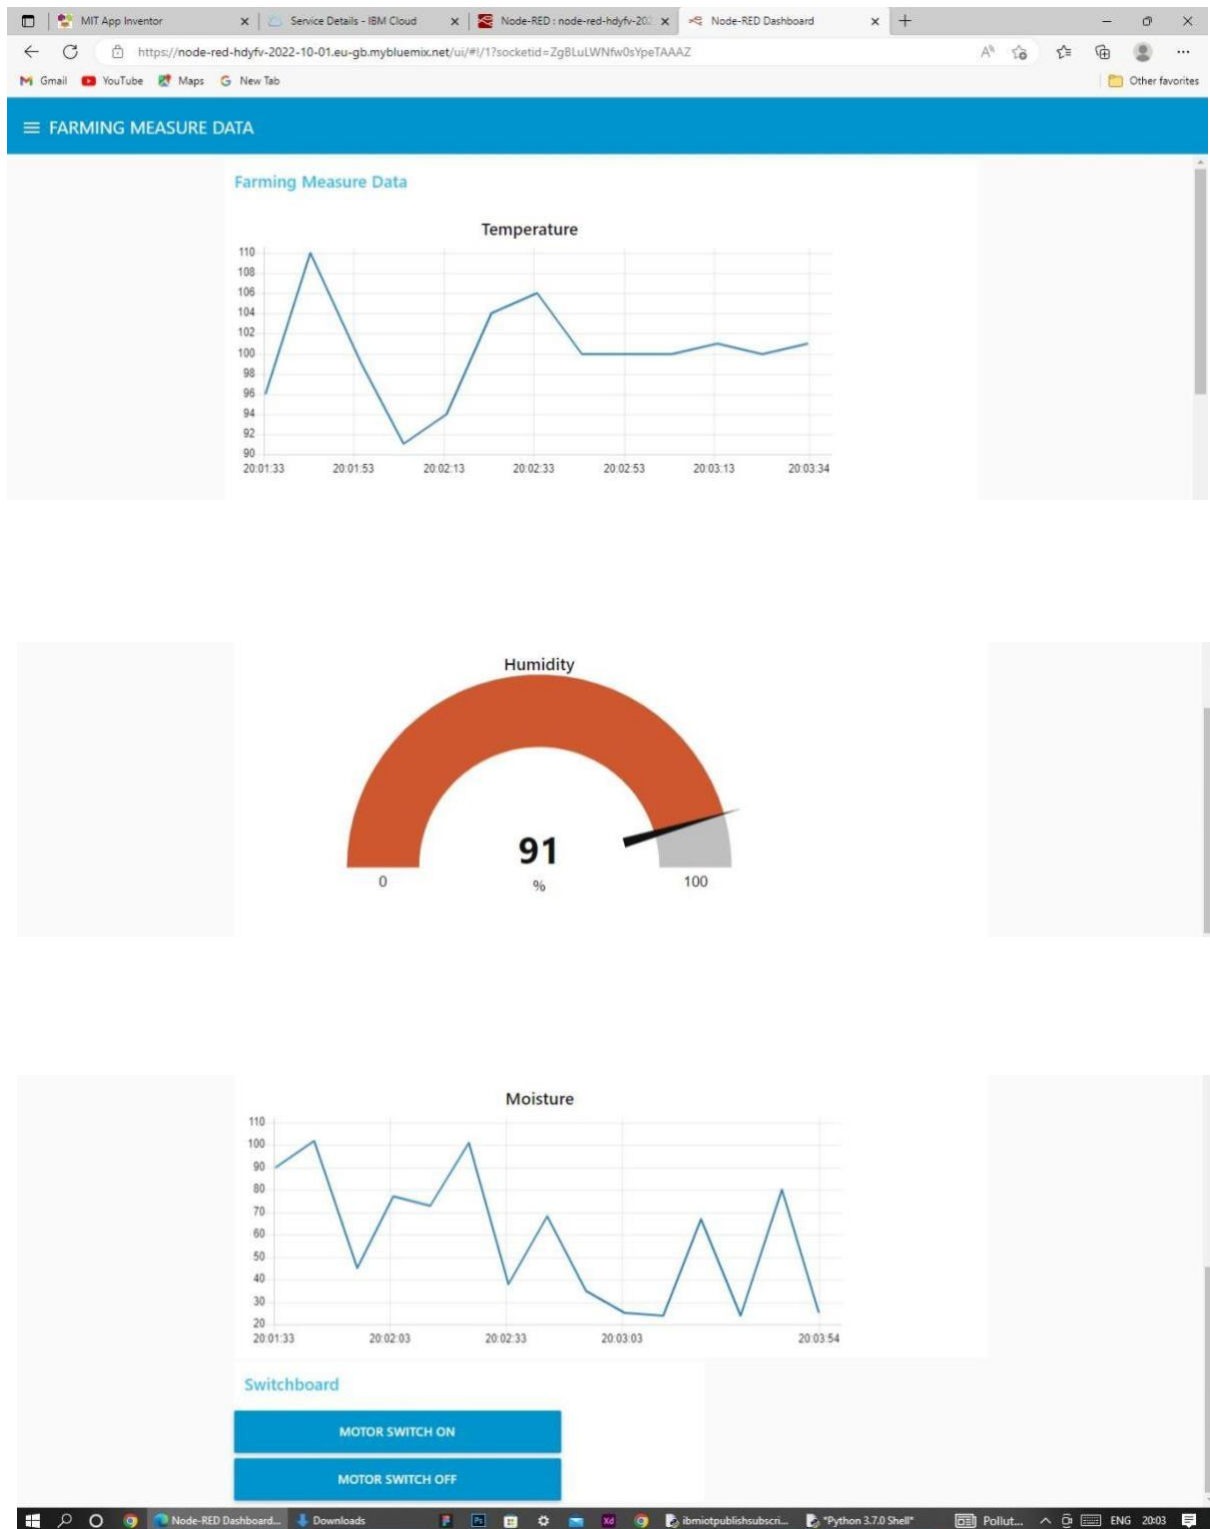

## Advantages & Disadvantages

### Advantages:

- Farms can be monitored and controlled remotely.
- Increase in convenience to farmers.
- Less labor cost.
- Better standards of living.

### Disadvantages:

- Lack of internet/connectivity issues.
- Added cost of internet and internet gateway infrastructure.
- Farmers wanted to adapt the use of Mobile App.

### Conclusion

Thus the objective of the project to implement an IoT system in order to help farmers to control and monitor their farms has been implemented successfully.