



LEFT END WALL FIXING

HOLE DIMENSIONS FOR R/H SIDE OPP. HAND

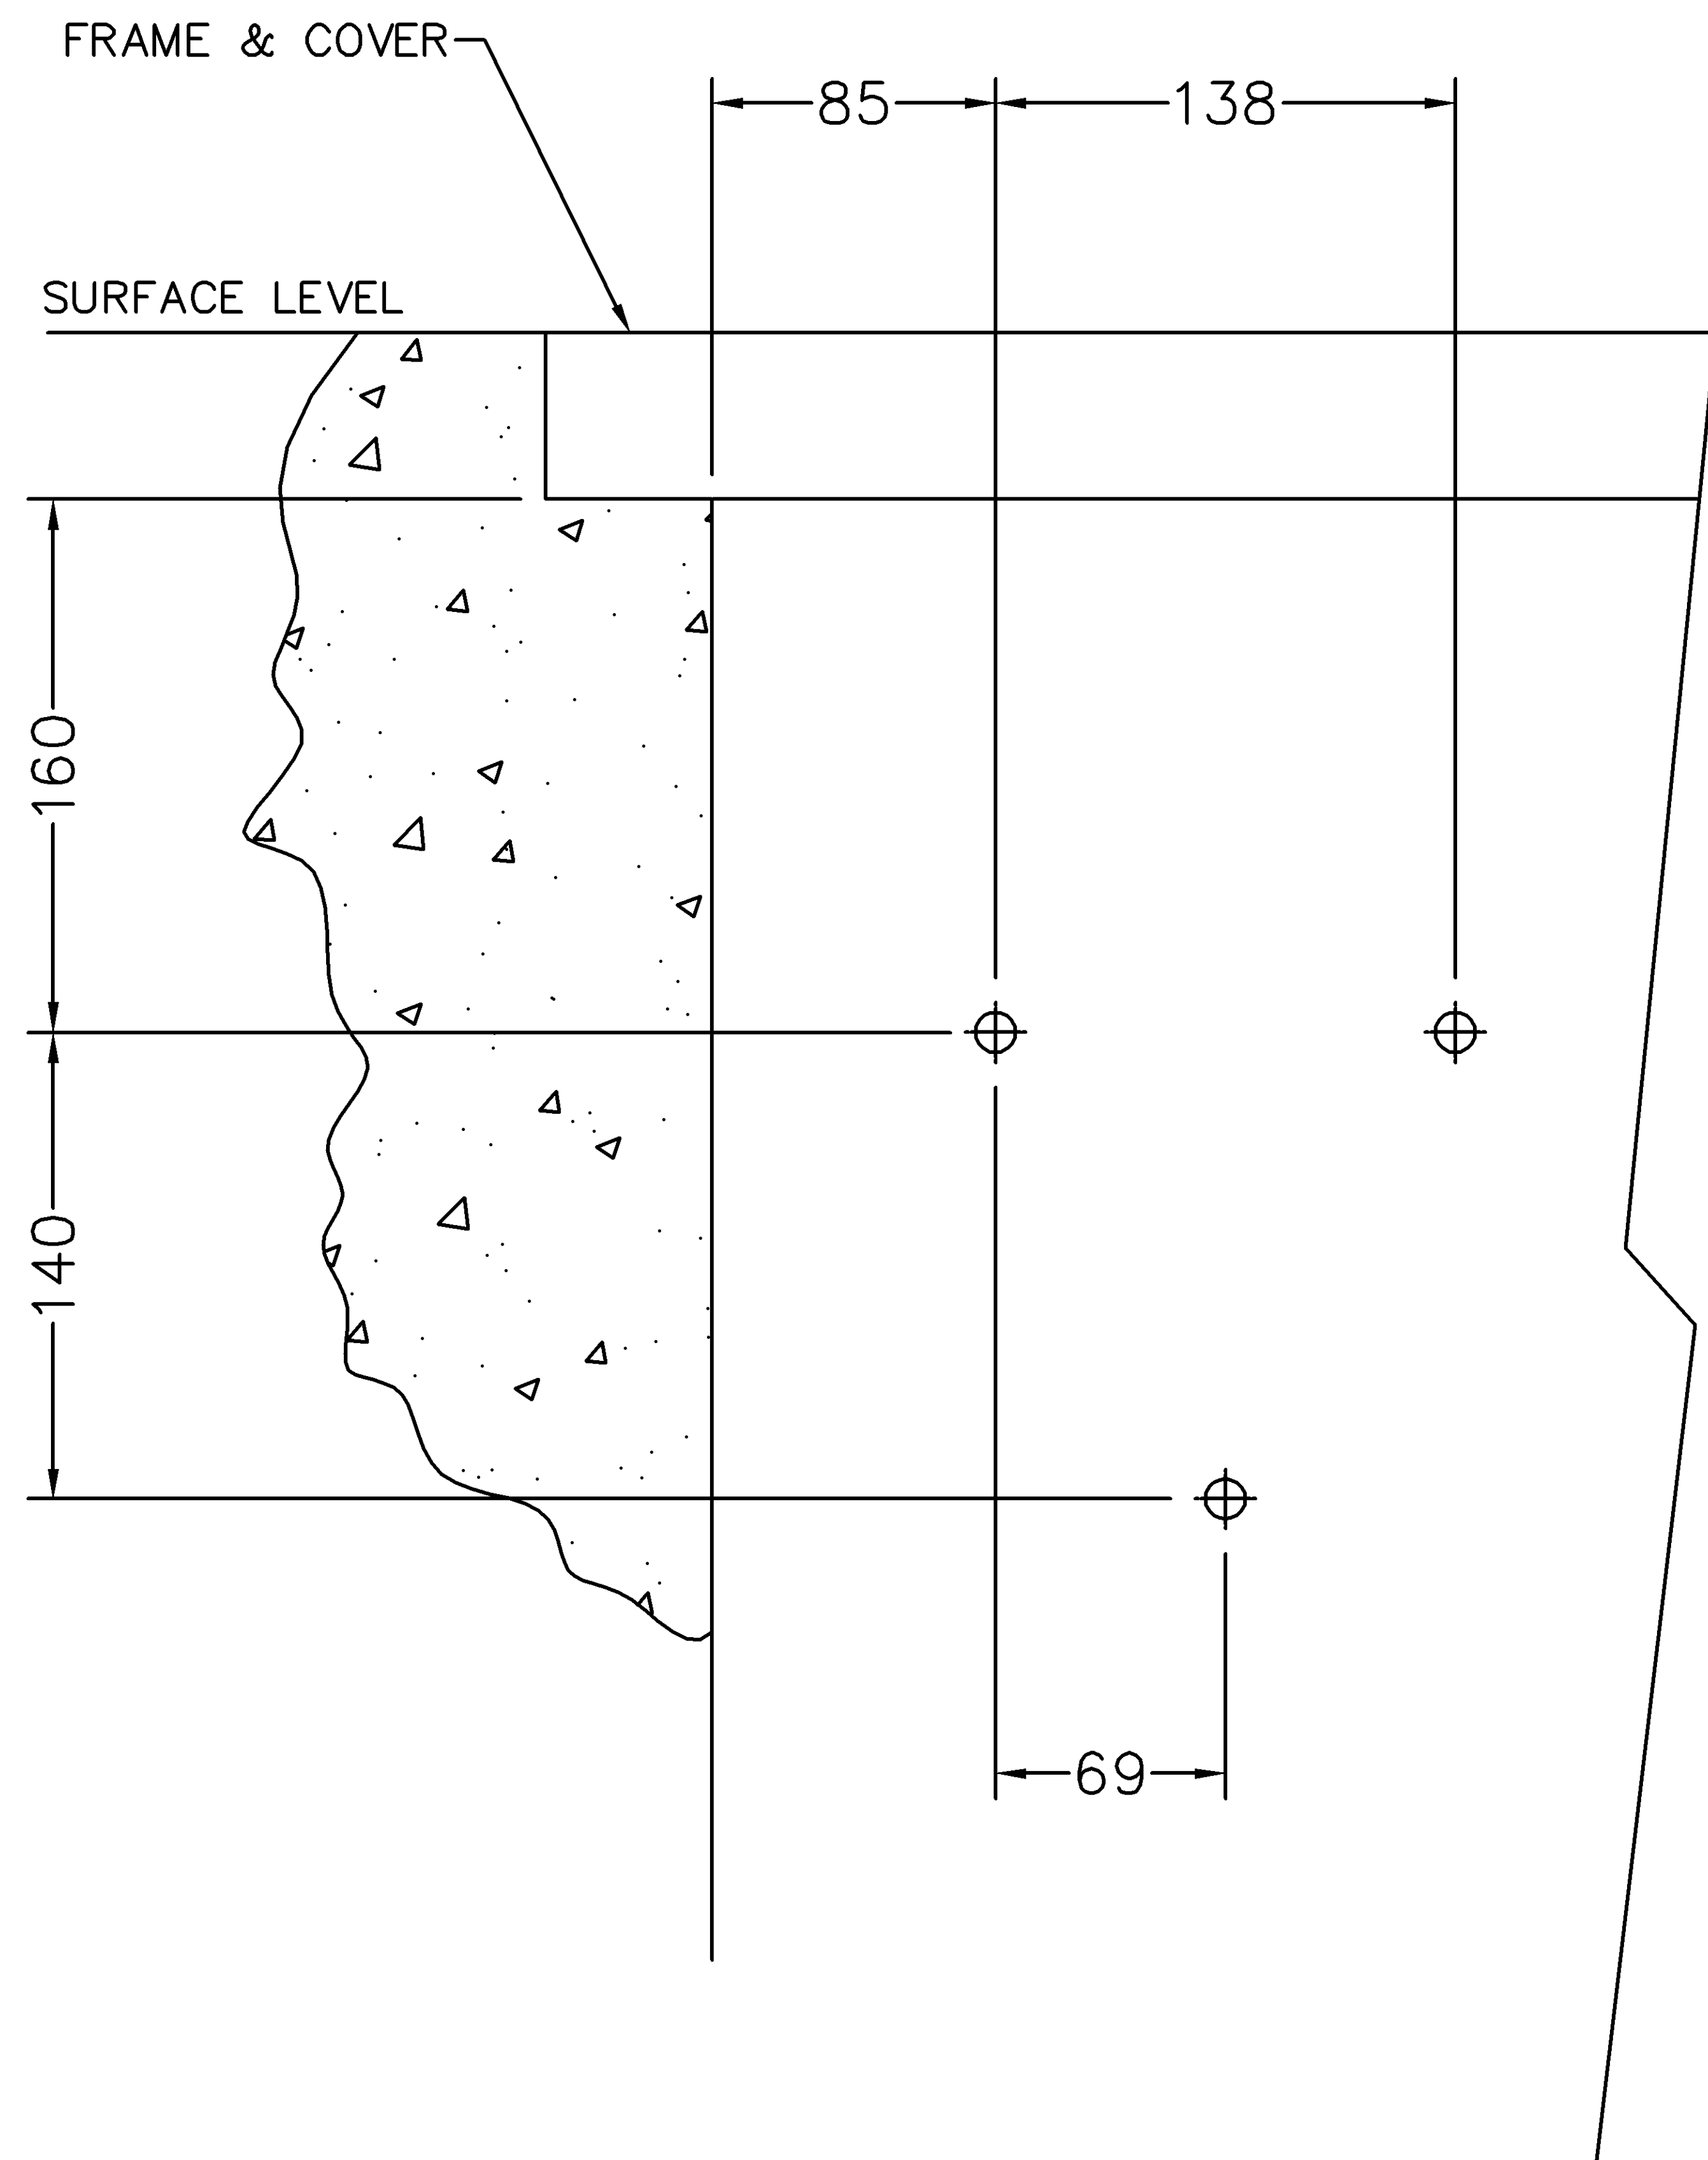


RIGHT END WALL FIXING

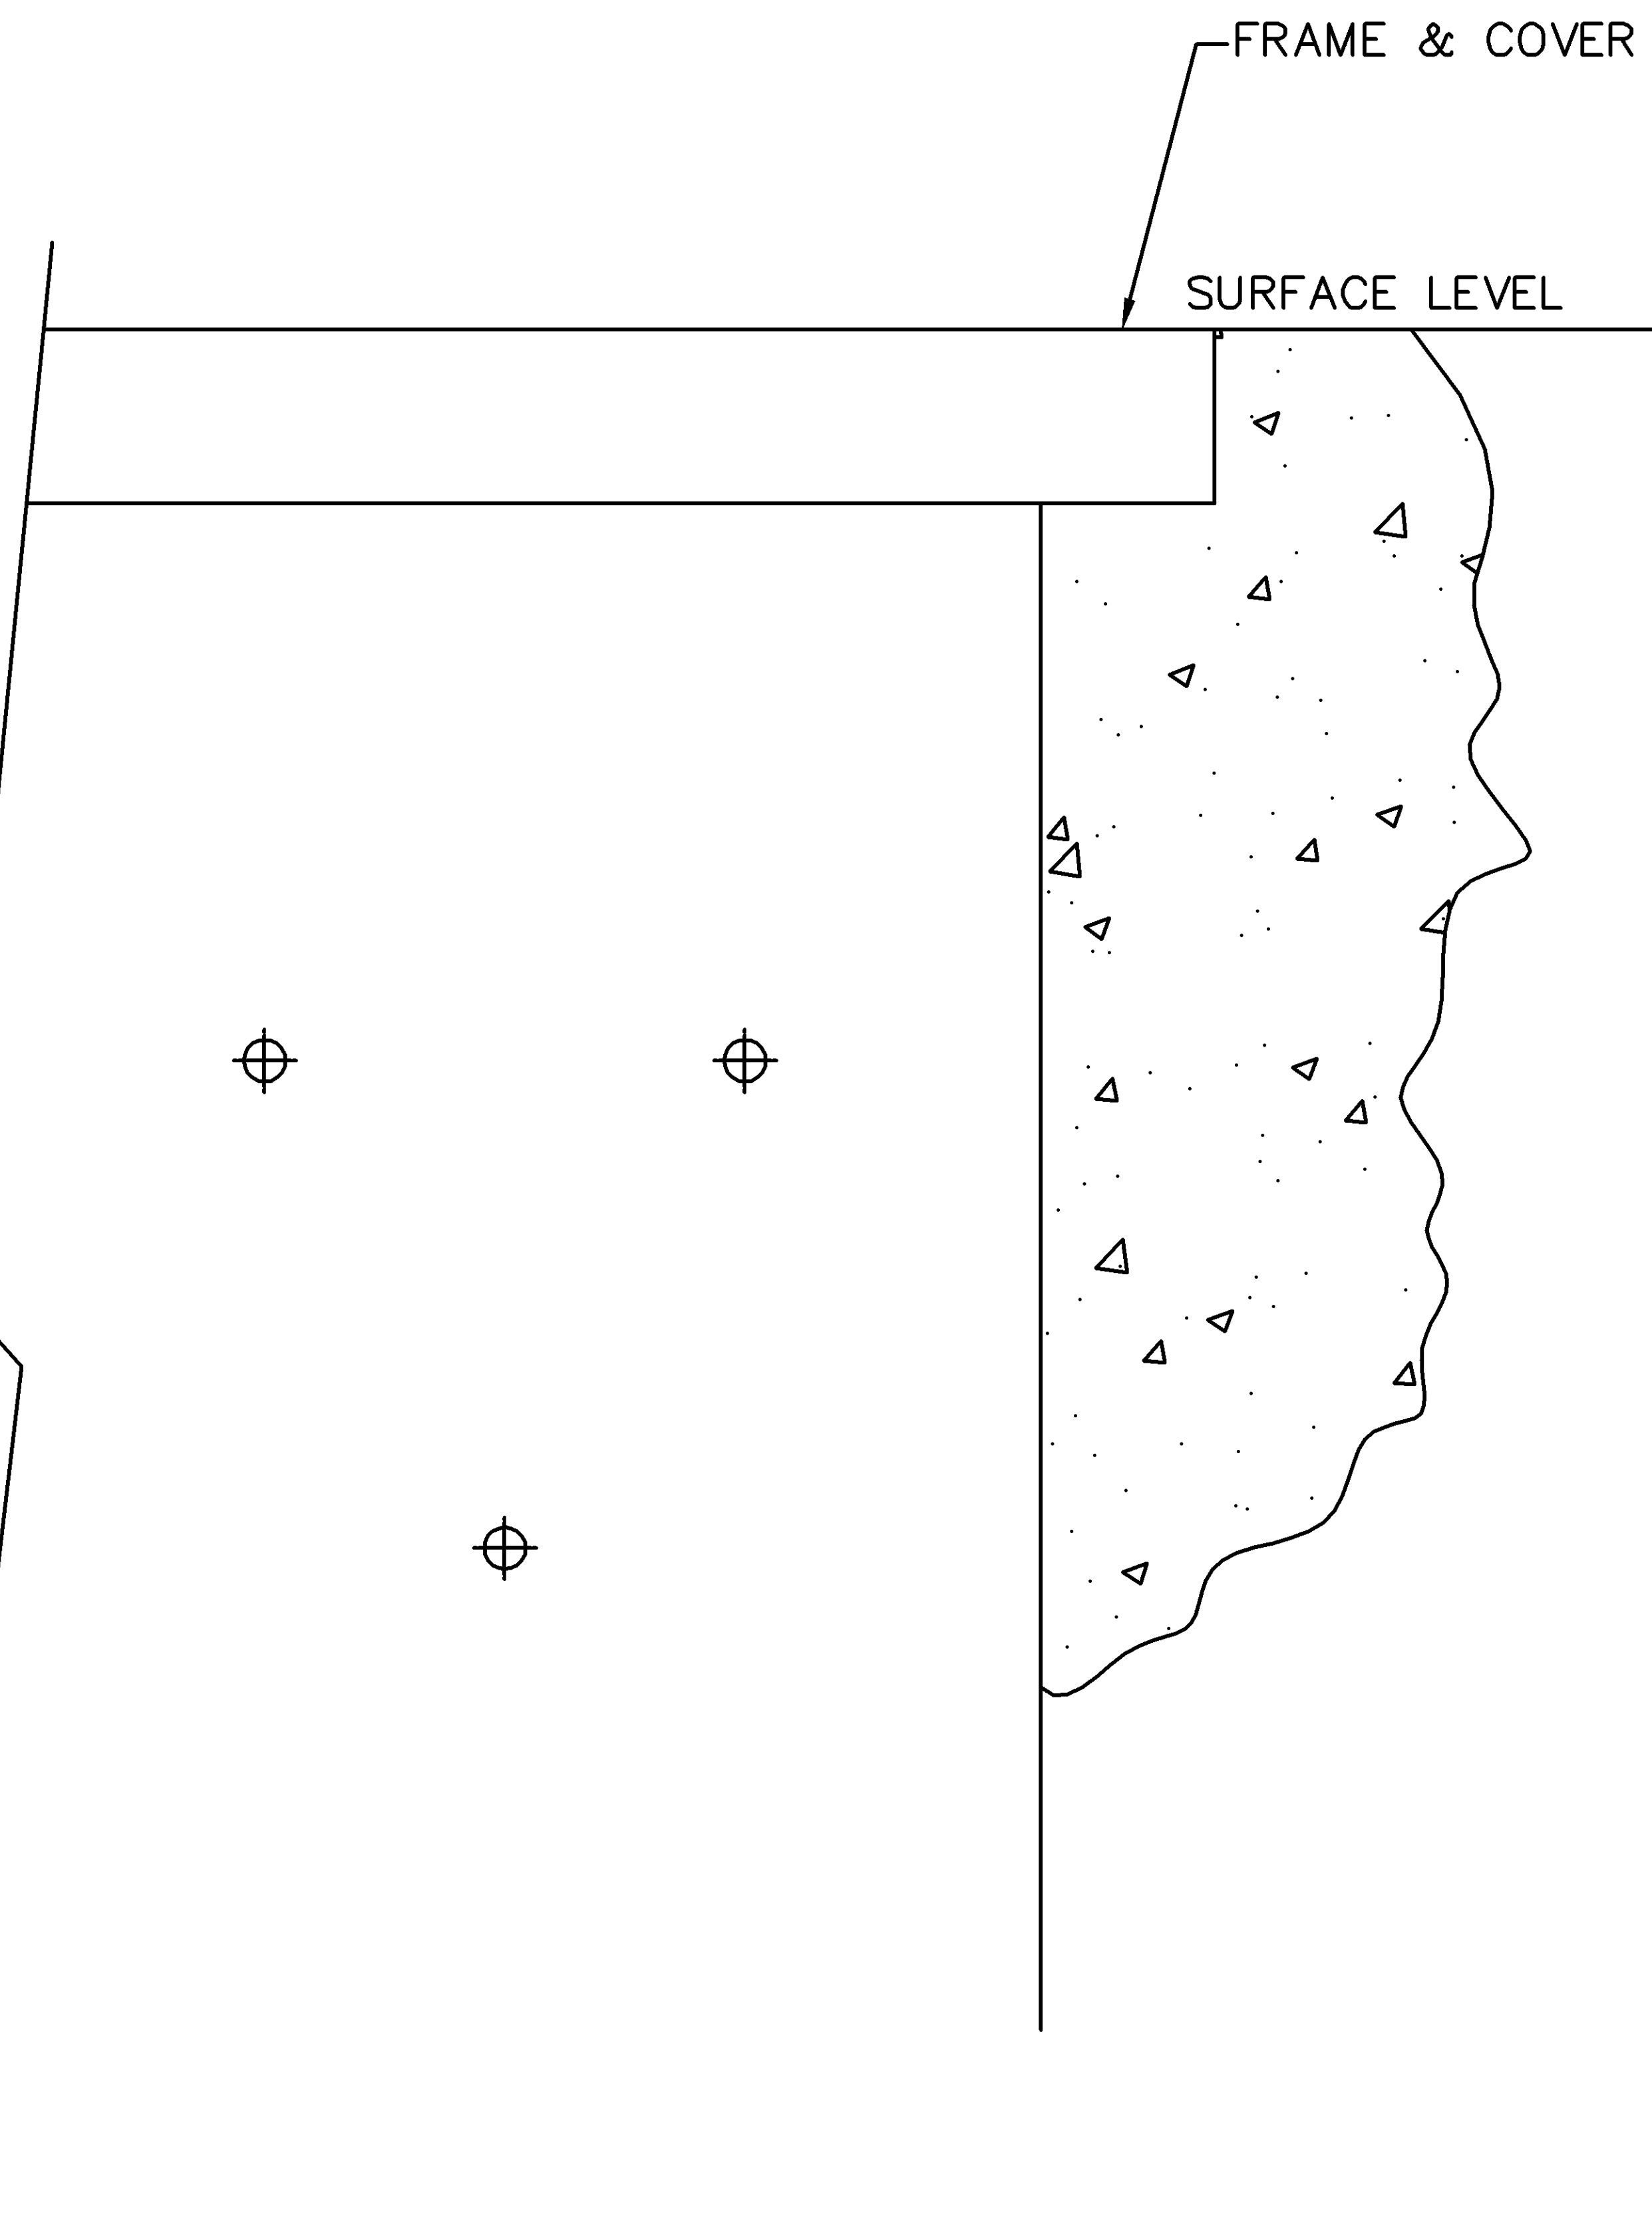

NOTES.

1. TOLERANCE FOR MOUNTING HOLE DIMENSIONS, 3 IN TOTAL TO BE $\pm 2\text{mm}$.
2. HOLE POSITIONS ARE FOR CHAMBERS FW 104, 106, 110, 111 – CW 11, 12.
3. HOLES TO BE DRILLED USING A 12mm MASONRY DRILL BIT TO A DEPTH OF 80mm.
4. DIMENSIONS SHOWN ARE FOR END WALL BRACKET MOUNTING.
5. NOTE THAT DIMENSIONS SHOWN ARE FOR:
 - i) VERTICALLY FROM UNDERSIDE OF FRAME, TOP OF CHAMBER WALL.
 - ii) HORIZONTAL FROM SURFACE LEVEL.
6. THE BT JOB PACK SHALL SPECIFY LEFT/RIGHT END WALL FIXING & QUANTITY.

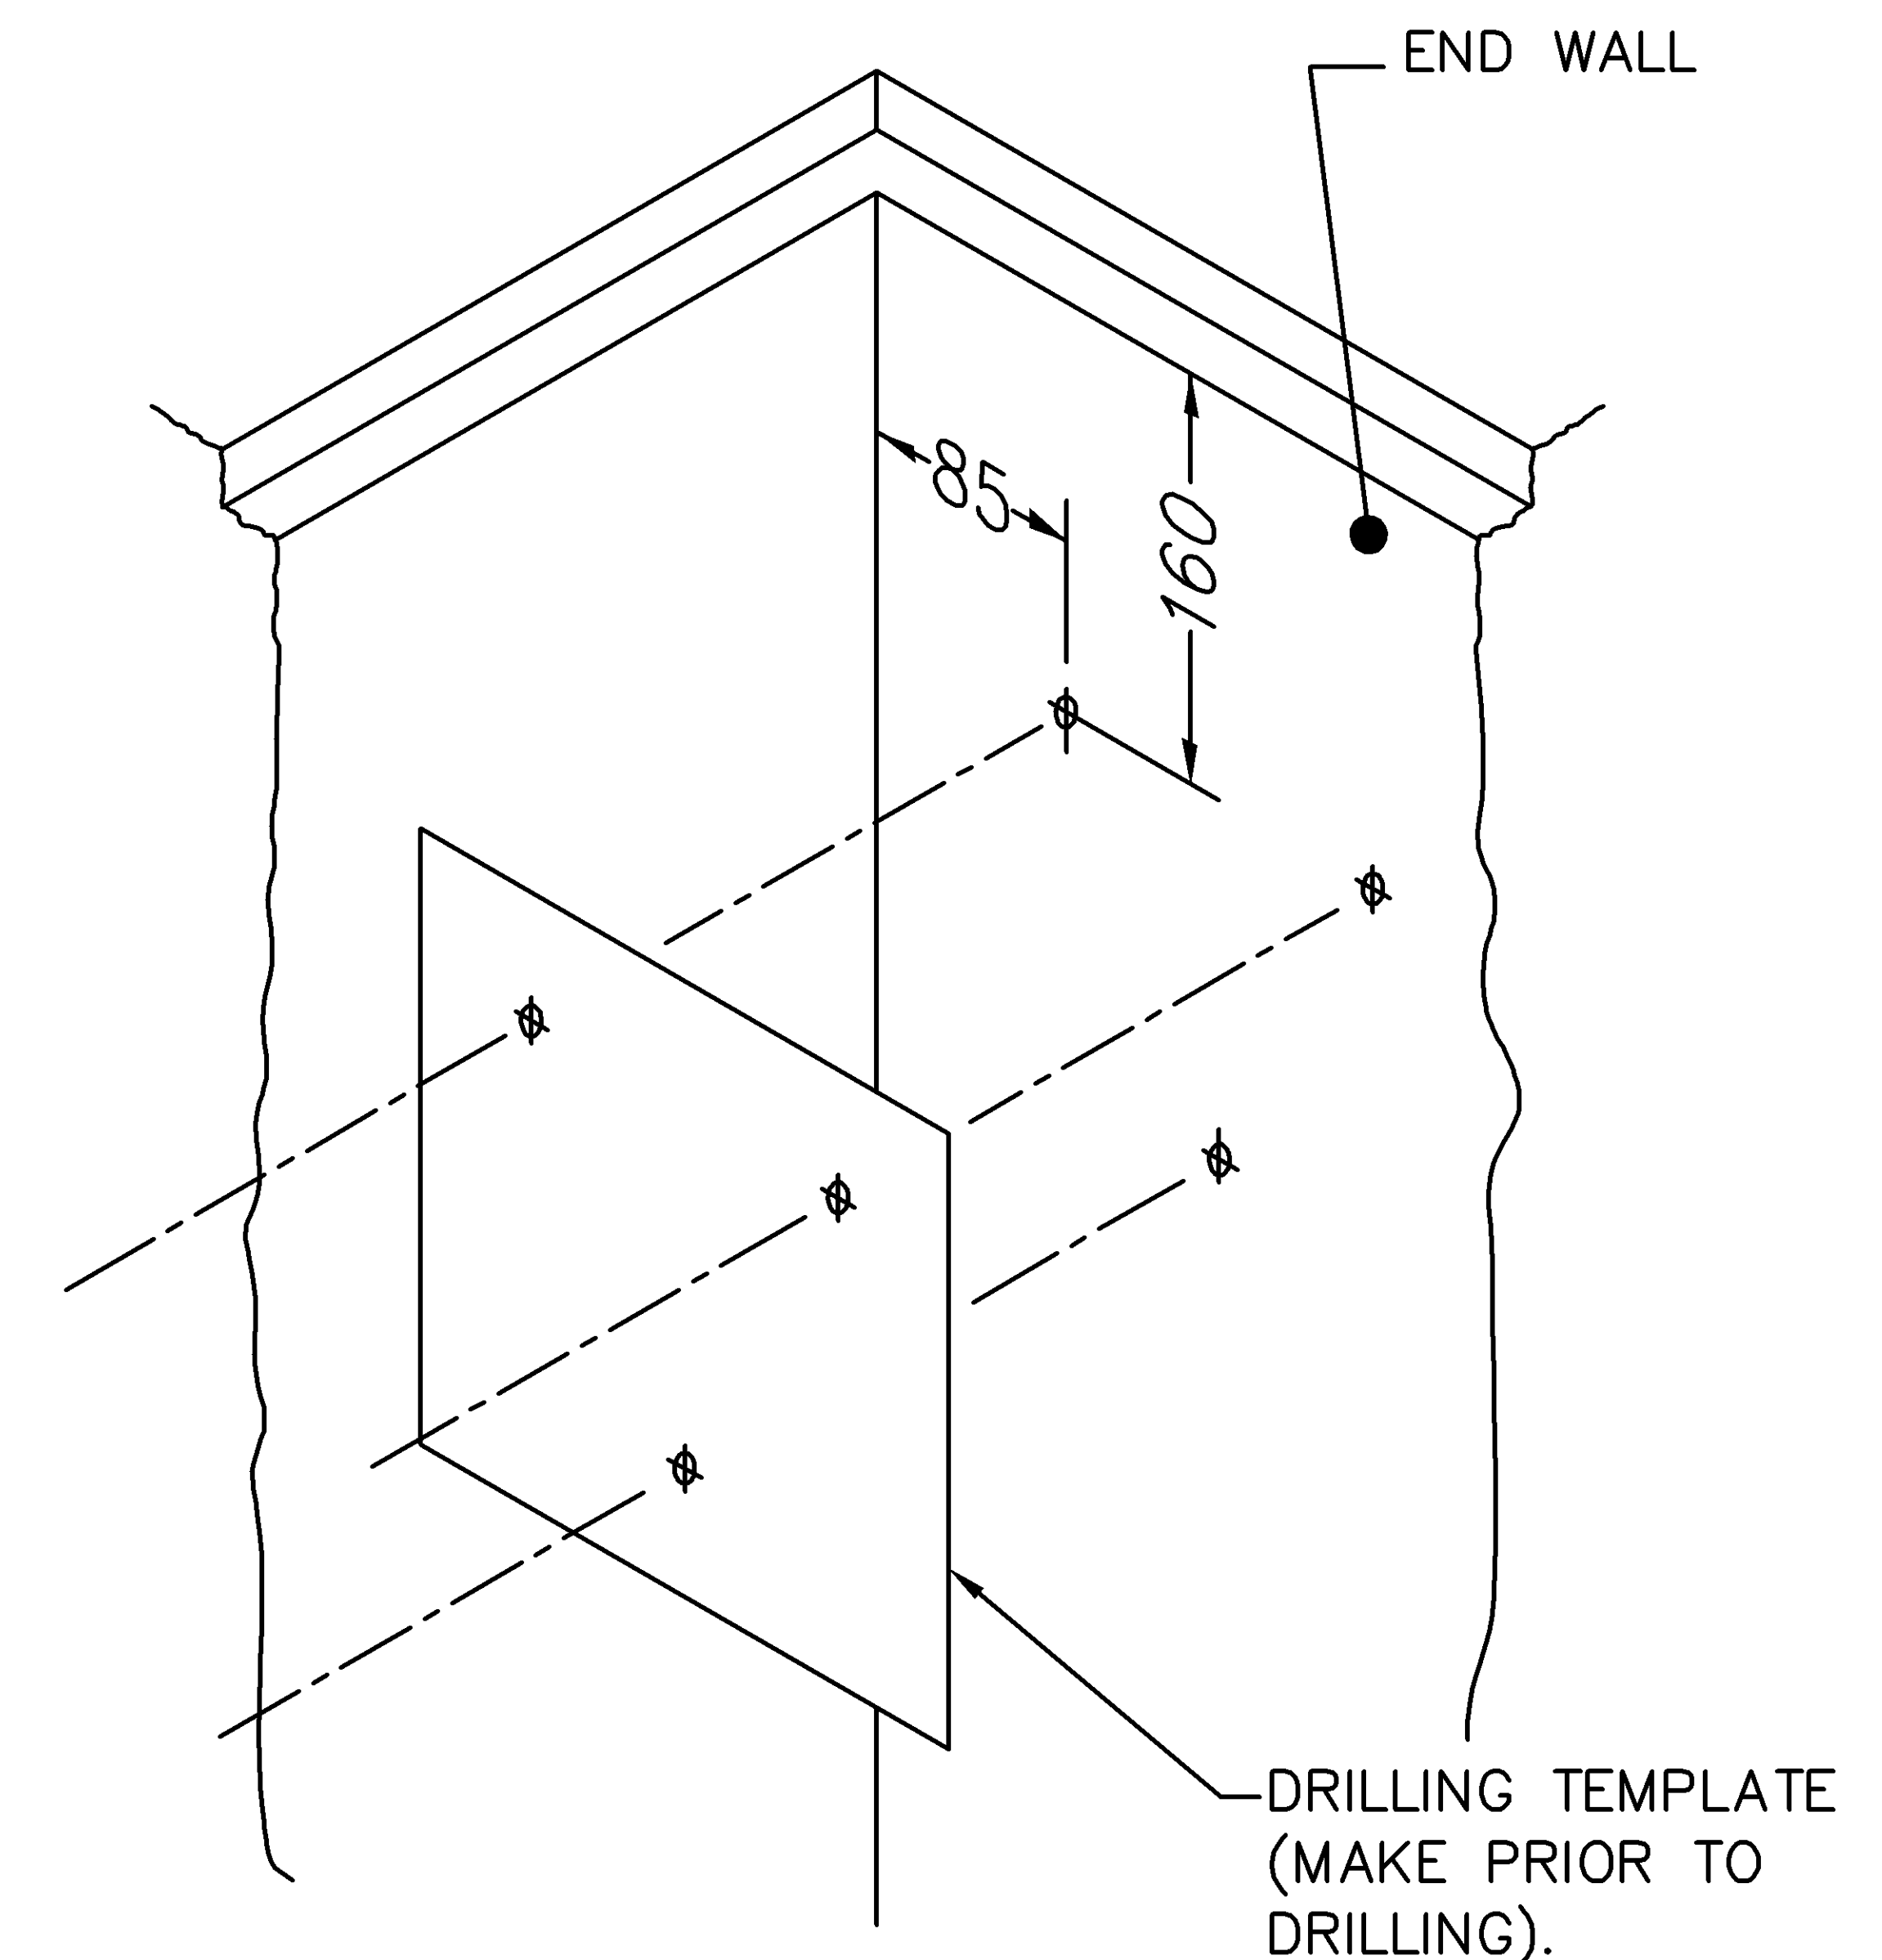

ISOMETRIC VIEW OF DRILLING POSITIONS FOR
LEFT HAND SIDE. (R/H SIDE OPP. HAND)

ANY MODIFICATION TO THE DRAWING OR THE USE OF ALTERNATIVE ITEMS TO THOSE SPECIFIED MUST BE AGREED WITH THE DESIGNER.

DIMENSIONS IN mm UNLESS OTHERWISE STATED

© British Telecommunications plc 2004

DO NOT SCALE

ORIGINAL SCALE

A2 A3	DRN S.A.D CKD A.OGUNDIYA	MATERIAL	DIMENSION 160 WAS 50. NOTE 2 AMENDED. TITLE WAS BT FOOTWAY CHAMBER.	C		BT CHAMBER MOUNTING HOLES FOR OTIAN MOBRA 2A		REFERENCES	
	CERTIFICATION DESIGNER A.OGUNDIYA CLIENT	FINISH				D.CUSSELLE	S.A.D	18/10/05	BT WHOLESALE, EBS U/G NETWORKS
DATE 20/01/04		AMENDMENT		ISSUE					