


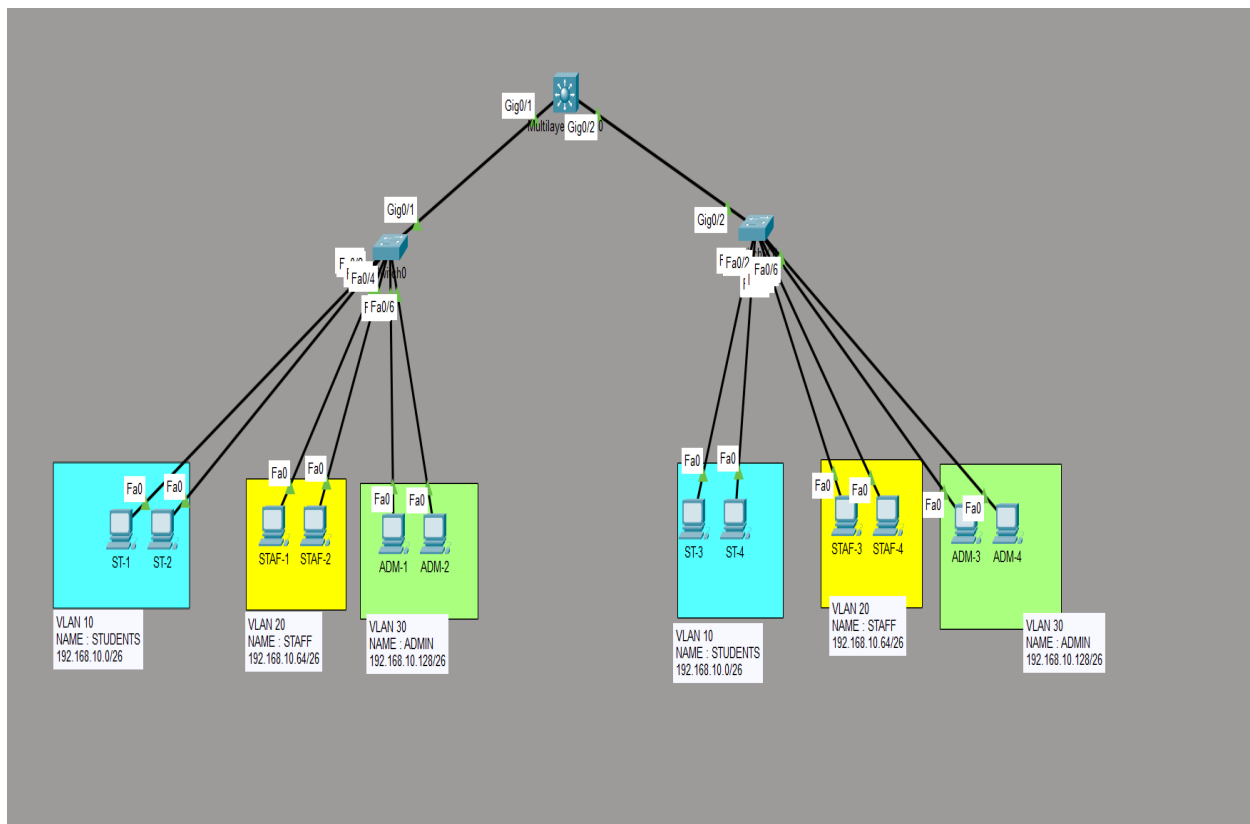

Addressing Table

VLAN	N. address	S. MASK	Prefix	F. usable	L. usable	Broadcast
10 Student	192.168.10.0	255.255.255.192	/26	192.168.10.1	192.168.10.62	192.168.10.63
20 Staff	192.168.10.64	255.255.255.192	/26	192.168.10.65	192.168.10.126	192.168.10.127
30 Admin	192.168.10.128	255.255.255.192	/26	192.168.10.129	192.168.10.190	192.168.10.191
Subnet 4	192.168.10.192	255.255.255.192	/26	192.168.10.193	192.168.10.254	192.168.10.255

```
MLS1(config)#do sh vlan b
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	STUDENTS	active	
20	STAFF	active	
30	ADMIN	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
MLS1(config)#
```

```
S1(config)#do sh vlan b
```

VLAN	Name	Status	Ports
1	default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/2
10	STUDENTS	active	Fa0/1, Fa0/2
20	STAFF	active	Fa0/3, Fa0/4
30	ADMIN	active	Fa0/5, Fa0/6
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S1(config)#
```

```
S2(config)#do sh vlan b
```

VLAN	Name	Status	Ports
1	default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1
10	STUDENTS	active	Fa0/1, Fa0/2
20	STAFF	active	Fa0/3, Fa0/4
30	ADMIN	active	Fa0/5, Fa0/6
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S2(config)#
```