

## Chapter 1: Introduction

After completing this chapter, you will understand what this class is, what topics are covered, and the overall class objectives.

### Table of contents

<b>1.1</b>	<b>What is this Class.....</b>	<b>2</b>
<b>1.2</b>	<b>Prerequisites .....</b>	<b>2</b>
<b>1.3</b>	<b>Required Software .....</b>	<b>2</b>
1.3.1	ModusToolbox™ tools.....	2
1.3.2	AIROC™ Bluetooth® test and debug tool (CySmart).....	2
1.3.3	LightBlue (Optional).....	2
1.3.4	Beacon Scanner app .....	2
<b>1.4</b>	<b>Bluetooth® Families and Development Kits .....</b>	<b>3</b>
1.4.1	AIROC™ Wi-Fi and Bluetooth® Devices with Host MCU .....	4
1.4.2	AIROC™ Bluetooth® SOC .....	4
1.4.3	AIROC™ Bluetooth® Microcontroller.....	4
<b>1.5</b>	<b>Exercises .....</b>	<b>5</b>
	Exercise 1: Install Software.....	5

### Document conventions

Convention	Usage	Example
Courier New	Displays code and text commands	CY_ISR_PROTO(MyISR) ; make build
<i>Italics</i>	Displays file names and paths	<i>sourcefile.hex</i>
[bracketed, bold]	Displays keyboard commands in procedures	[Enter] or [Ctrl] [C]
Menu > Selection	Represents menu paths	File > New Project > Clone
<b>Bold</b>	Displays GUI commands, menu paths and selections, and icon names in procedures	Click the <b>Debugger</b> icon, and then click <b>Next</b> .

## 1.1 What is this Class

This is a class to teach how to use Bluetooth® Low Energy in ModusToolbox™ applications. The descriptions and exercises use a PSoC™ 6 MCU as a host to an AIROC™ CYW43012 Wi-Fi & Bluetooth® combo chip.

After completing this class, you should be able to create and debug full Bluetooth® applications using ModusToolbox™ tools including peripherals, centrals, and beacons.

## 1.2 Prerequisites

This class assumes that you know the basics of using the ModusToolbox™ ecosystem, how to interact with PSoC™ 6 MCUs including using peripherals, and how to program a PSoC™ 6 device. If you are unfamiliar with these topics, the following classes should be reviewed first:

- ModusToolbox™ Software Training Level 1 – Getting Started
- ModusToolbox™ Software Training Level 2 – PSoC™ MCUs

## 1.3 Required Software

The following software is required for completing the exercises in this class. Installation instructions will be provided in the exercises.

### 1.3.1 ModusToolbox™ tools

You should already have ModusToolbox™ tools installed on your system. If not, you will install it in the exercises.

### 1.3.2 AIROC™ Bluetooth® test and debug tool (CySmart)

We will make extensive use of a tool called CySmart to act as a Bluetooth® LE central to connect to and test the peripherals that we will create. That tool is available for Android, iOS, and Windows. Instructions to install the appropriate program(s) will be provided in the exercises.

Recommended: if you want to use CySmart for Windows, you will need a CY5677 CySmart Bluetooth® Low Energy Dongle. Details on the CY5677 can be found at:

<https://www.infineon.com/cms/en/product/evaluation-boards/cy5677>

The Windows version of CySmart gives you much more control and ability to see what is going on so it is recommended to use it if possible.

### 1.3.3 LightBlue (Optional)

Another popular Bluetooth® development tool is called LightBlue. It is available on both Android and iOS and can perform similar functions as CySmart.

### 1.3.4 Beacon Scanner app

For the chapter on Bluetooth® beacons, a beacon scanner app for Android or iOS used to test the exercises. Many free beacon scanner apps are available.

## 1.4 Bluetooth® Families and Development Kits

Infineon supports Bluetooth® on multiple families of devices. A high-level summary of the different solutions is:

- AIROC™ Wi-Fi and Bluetooth® Devices (CYW4343x, CYW43012, CYW4373x) with Host MCU
  - The CYW43xxx device runs the lower levels of the stack in hosted mode while a host processor such as a PSoC™ 6 MCU runs the upper levels of the stack and the application.
  - This solution supports Bluetooth® LE and Wi-Fi
- AIROC™ Bluetooth® SoC (CYW20xxx)
  - The 20xxx device runs the entire Bluetooth® stack and the application.
  - This solution supports Bluetooth® BR, EDR, and LE.
  - The firmware architecture for this solution is almost identical to the 43xxx case.
- AIROC™ Bluetooth® Microcontroller (PSoC™ 63 MCU)
  - The PSoC™ 63 device runs the entire Bluetooth® stack and the application.
  - This solution supports Bluetooth® LE.
  - The stack for this solution is different from the prior two cases so the firmware architecture is considerably different.

*Note: This class covers the AIROC™ Bluetooth® SoC family of devices.*


*Note: All examples and exercises in this class use the CYW20820 device. The kit used is the CYW920820M2EVB-01.*

Development kits are available for each of the three families described above. See the list of kits in the ModusToolbox™ Project Creator tool and the Infineon website the most up-to date list.


### 1.4.1 AIROC™ Wi-Fi and Bluetooth® Devices with Host MCU

In the solution with separate radio controller and host MCU, the interface between the host (e.g. PSoC™ 6) and the radio device (e.g. CYW43012) uses the Host Controller Interface (HCI). The lower level of the Bluetooth® stack (the Controller Stack) will run on the CYW43012 while the higher level of the Bluetooth stack (the Host Stack) will run on the PSoC™ 6 along with the user application.

Here is a picture that illustrates the connection:

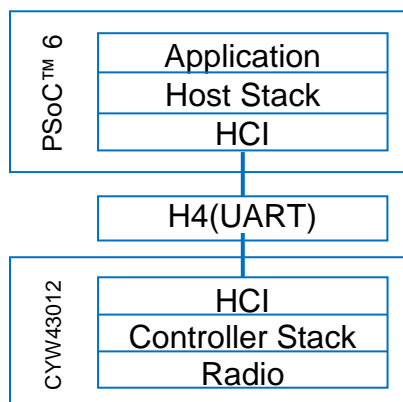

The HCI interface physically runs using a 4-pin UART interface. The PSoC™ 6 that we are using has multiple UARTs on it so don't worry – you will still have a UART interface to print debug messages. There are also two wake pins that are used for low power which we will cover later.

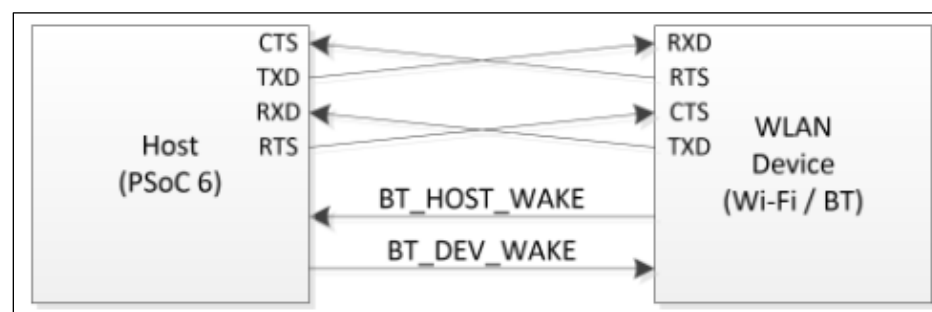

*Note: The CYW43012 also supports Wi-Fi which uses a completely independent SDIO interface (not shown) for communication between the PSoC™ 6 host and the CYW43012.*

The controller (e.g. CYW43012) runs the radio physical layer (PHY) and link layer (LL). Everything above that runs on the PSoC™ 6.

### 1.4.2 AROC™ Bluetooth® SOC

In the Bluetooth™ SOC solution, the stack and user application run on a single device. Many of the devices in this family are combo devices that support Bluetooth® BR/EDR and LE.

### 1.4.3 AIROC™ Bluetooth® Microcontroller

PSoC™ 63 offer the benefit of a powerful PSoC™ MCU including CAPSENSE™ along with Bluetooth® LE in a single device.

## 1.5 Exercises

### Exercise 1: Install Software

In this exercise, we will make sure you have all of the software needed for the class.

#### ModusToolbox™ tools



1. You should already have ModusToolbox™ tools installed on your system. If not, refer to the ModusToolbox™ Software Training Level 1 Getting Started class or visit <https://www.infineon.com/cms/en/design-support/tools/sdk/modustoolbox-software> for instructions.

*Note: You must use ModusToolbox 2.3.1 or later. If you have ModusToolbox 2.3, you must install the 2.3.1 patch for the exercises in this class to work.*

#### AIROC™ Bluetooth® test and debug tool (CySmart)



1. Install CySmart onto your smartphone from the Android or iOS app store.



2. Recommended: Install CySmart for Windows if you have a Windows computer or a Windows virtual machine and you have a CY5677 CySmart Bluetooth® Low Energy USB Dongle.

You can find the installer at <https://www.infineon.com/cms/en/design-support/tools/utilities/wireless-connectivity/cysmart-bluetooth-le-test-and-debug-tool>

#### LightBlue (optional)



1. Install LightBlue onto your smartphone from the Android or iOS app store if you want to try it in addition to CySmart.

#### Beacon Scanner App



1. Install the beacon app of your choice onto your smartphone from the Android or iOS app store.

For Android, "Beacon Scanner" is a good choice.

For iOS, "BLE Scanner" is a good choice.

#### **Trademarks**

All referenced product or service names and trademarks are the property of their respective owners.

**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2022 Infineon Technologies AG.**  
**All Rights Reserved.**

#### **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

#### **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.