

ACAN2515 library for Arduino

Version 2.0.3

Pierre Molinaro

January 9, 2020

Contents

1	Versions	4
2	Features	5
3	Data flow	5
4	A simple example: LoopBackDemo	6
5	The CANMessage class	9
6	Connecting a MCP2515 to your microcontroller	10
6.1	Using alternate pins on Teensy 3.x	10
6.2	Using alternate pins on an Adafruit Feather M0	11
6.3	Connecting to an ESP32	12
6.3.1	Connecting MCP2515_CS and MCP2515_INT	13
6.3.2	Using SPI	13
6.3.3	Using HSPI	13
6.4	Connection with no interrupt pin	14
7	Sending frames	14
7.1	The tryToSend method	15
7.2	Driver transmit buffer sizes	16
7.3	The transmitBufferSize method	16
7.4	The transmitBufferCount method	16
7.5	The transmitBufferPeakCount method	16
8	Retrieving received messages using the receive method	17
8.1	Driver receive buffer size	17
8.2	The receiveBufferSize method	18
8.3	The receiveBufferCount method	18
8.4	The receiveBufferPeakCount method	18
9	Acceptance filters	18
9.1	Default behaviour	18
9.2	Defining filters	19

9.2.1	No filter	20
9.2.2	One filter	20
9.2.3	Two filters	20
9.2.4	Three to five filters	21
9.2.5	Six filters	21
9.3	Extended frames acceptance	22
9.4	Standard frames acceptance	22
10	The dispatchReceivedMessage method	23
11	The ACAN2515::begin method reference	24
11.1	The ACAN2515::begin method prototypes	24
11.2	Defining explicitly the interrupt service routine	24
11.3	The error code	24
11.3.1	kNoMCP2515	25
11.3.2	kTooFarFromDesiredBitRate	25
11.3.3	kInconsistentBitRateSettings	25
11.3.4	kINTPinIsNotAnInterrupt	25
11.3.5	kISRIsNull	26
11.3.6	kRequestedModeTimeOut	26
11.3.7	kAcceptanceFilterArrayIsNull	26
11.3.8	kOneFilterMaskRequiresOneOrTwoAcceptanceFilters	26
11.3.9	kTwoFilterMasksRequireThreeToSixAcceptanceFilters	26
11.3.10	kCannotAllocateReceiveBuffer	26
11.3.11	kCannotAllocateTransmitBuffer0	26
11.3.12	kCannotAllocateTransmitBuffer1	27
11.3.13	kCannotAllocateTransmitBuffer2	27
11.3.14	kISRNotNullAndNoIntPin	27
12	The ACAN2515::changeModeOnTheFly function	27
13	The ACAN2515::setFiltersOnTheFly functions	28
13.1	No filter	28
13.2	One filter	28
13.3	Two filters	29
13.4	Three to five filters	29
13.5	Six filters	29
14	The ACAN2515::end method	30
15	The ACAN2515 instance usage	30
16	ACAN2515Settings class reference	31
16.1	First ACAN2515Settings constructor: computation of the CAN bit settings	31
16.2	Second ACAN2515Settings constructor: explicit CAN bit settings	34
16.3	The CANBitSettingConsistency method	36
16.4	The actualBitRate method	36
16.5	The exactBitRate method	37
16.6	The ppmFromDesiredBitRate method	37
16.7	The samplePointFromBitStart method	38

16.8	Properties of the ACAN2515Settings class	38
16.8.1	The mOneShotModeEnabled property	38
16.8.2	The mTXBPRIORITY property	38
16.8.3	The mRequestedMode property	39
16.8.4	The mCLKOUT property	39
16.8.5	The mRolloverEnable property	39
17	CAN controller state	39
17.1	The receiveErrorCounter method	39
17.2	The transmitErrorCounter method	40

1 Versions

Version	Date	Comment
2.0.3	January 9, 2020	Interrupt pin is attached by <code>ACAN2515::beginWithoutFilterCheck</code> method only when there is configuration error (thanks to mvSarma for reporting this error).
2.0.2	June 15, 2019	Added forgotten <code>ACAN2515::receiveBufferCount</code> and <code>ACAN2515::receiveBufferSize</code> methods (thanks to Ede2016 for reporting this error). ESP32: using <code>xSemaphoreGiveFromISR</code> instead of <code>xSemaphoreGive</code> in interrupt service routine.
2.0.1	April 19, 2019	Fixed incorrect SJW setting.
2.0.0	February 19, 2019	Added <code>SleepMode</code> mode (see section 16.8.3 page 39). Added <code>ACAN2515::changeModeOnTheFly</code> function (section 12 page 27). Added <code>ACAN2515::setFiltersOnTheFly</code> functions (section 13 page 28). Added <code>ACAN2515::end</code> function (section 14 page 30).
1.1.3	February 4, 2019	Removed useless instructions in ESP32 sample codes.
1.1.2	February 3, 2019	New option: no interrupt pin (section 6.4 page 14). First release running on ESP32 (section 6.3 page 12).
1.1.1	January 20, 2019	Updated documentation (section 9.1 page 18), as <code>mRolloverEnable</code> is true by default (thanks to PatrykSSS for reporting this documentation error). Added <code>ACAN2515::receiveBufferPeakCount</code> method, forgotten in previous releases (thanks to qwec01 for reporting this bug). New error flag: <code>kCannotAllocateReceiveBuffer</code> , section 11.3.10 page 26 . New error flag: <code>kCannotAllocateTransmitBuffer0</code> , section 11.3.11 page 26 . New error flag: <code>kCannotAllocateTransmitBuffer1</code> , section 11.3.12 page 27 . New error flag: <code>kCannotAllocateTransmitBuffer2</code> , section 11.3.13 page 27 .
1.1.0	November 24, 2018	<code>ACAN2515Settings::CANBitSettingConsistency</code> now returns an <code>uint16_t</code> . Compatibility with <code>ACAN2515Tiny</code> library.
1.0.4	November 23, 2018	BugFix: transmit buffer #2 size setting. Transmit and send buffers properties are now <code>uint16_t</code> (instead of <code>uint32_t</code>), for saving memory. <code>ACAN2515::begin</code> now returns an <code>uint16_t</code> (instead of <code>uint32_t</code>). New <code>ACAN2515Settings</code> constructor with explicit bit rate settings (see section 16.2 page 34 and <code>LoopBackDemoBitRateSettings</code> demo sketch).
1.0.3	November 3, 2018	Correct setting of <code>rtr</code> and <code>ext</code> properties on message receive (thanks to Arjan-Woltjer for having fixed this bug, https://github.com/pierremolinaro/acan2515/pull/1).
1.0.1	October 23, 2018	Workaround external interrupt masking for Teensy 3.5 / 3.6. Use of a lambda function for interrupt service routine.
1.0.0	October 12, 2018	Initial release.

Note from updating from 1.0.x.

In 1.0.x, the `ACAN2515RequestedMode` and `ACAN2515CLKOUT_SOF` were autonomous enumeration classes. From 1.1.x, they are embedded in the `ACAN2515Settings` class. Consequently, the correspondent `ACAN2515Settings` property settings should be modified accordingly; for example:

```
settings.mRequestedMode = ACAN2515RequestedMode::LoopBackMode ; // In 1.0.x
```

should be rewritten as:

```
settings.mRequestedMode = ACAN2515Settings::LoopBackMode ; // In 1.1.x
```

2 Features

The ACAN2515 library is a MCP2515 CAN (“Controller Area Network”) Controller driver for any board running Arduino. It has been designed to make it easy to start and to be easily configurable:

- default configuration sends and receives any frame – no default filter to provide;
- efficient built-in CAN bit settings computation from user bit rate;
- user can fully define its own CAN bit setting values;
- all reception filter registers are easily defined (2 mask registers, 6 acceptance registers);
- reception filters accept call back functions;
- driver transmit buffer sizes are customisable;
- driver receive buffer size is customisable;
- overflow of the driver receive buffer is detectable;
- *loop back, self reception, listing only* MCP2515 controller modes are selectable.

3 Data flow

The [figure 1](#) illustrates message flow for sending and receiving CAN messages.

Sending messages. A message is defined by an instance of `CANMessage` class. For sending a message, user code calls the `tryToSend` method – see [section 7 page 14](#), and the `idx` property of the sent message specifies a transmit buffer. The ACAN2515 driver defines 3 transmit buffers, each of them corresponding to the one of the 3 MCP2515 transmit buffers (TXB0, TXB1, TXB2). These buffers can contain at most one message. The message is transferred in a driver transmit buffer before to be moved by the interrupt service routine into the corresponding MCP2515 transmit buffer. The size of the *Driver Transmit Buffer 0* is 16 by default, the size of the *Driver Transmit Buffer 1* and *Driver Transmit Buffer 2* are zero by default – see [section 7.2 page 16](#) for changing the default values.

Receiving messages. The MCP2515 *CAN Protocol Engine* transmits all correct frames to the *reception filters*. By default, they are configured as pass-all, see [section 9 page 18](#) for configuring them. Messages that pass the filters are stored in the *Reception Registers* (RXB0 and RXB1). The interrupt service routine transfers the messages from these registers to the *Driver Receive Buffer*. The size of the *Driver Receive Buffer* is 32 by default – see [section 8.1 page 17](#) for changing the default value. Three user methods are available:

- the `available` method returns `false` if the *Driver Receive Buffer* is empty, and `true` otherwise;
- the `receive` method retrieves messages from the *Driver Receive Buffer* – see [section 8 page 17](#);
- the `dispatchReceivedMessage` method if you have defined the reception filters that name a call-back function – see [section 10 page 23](#).

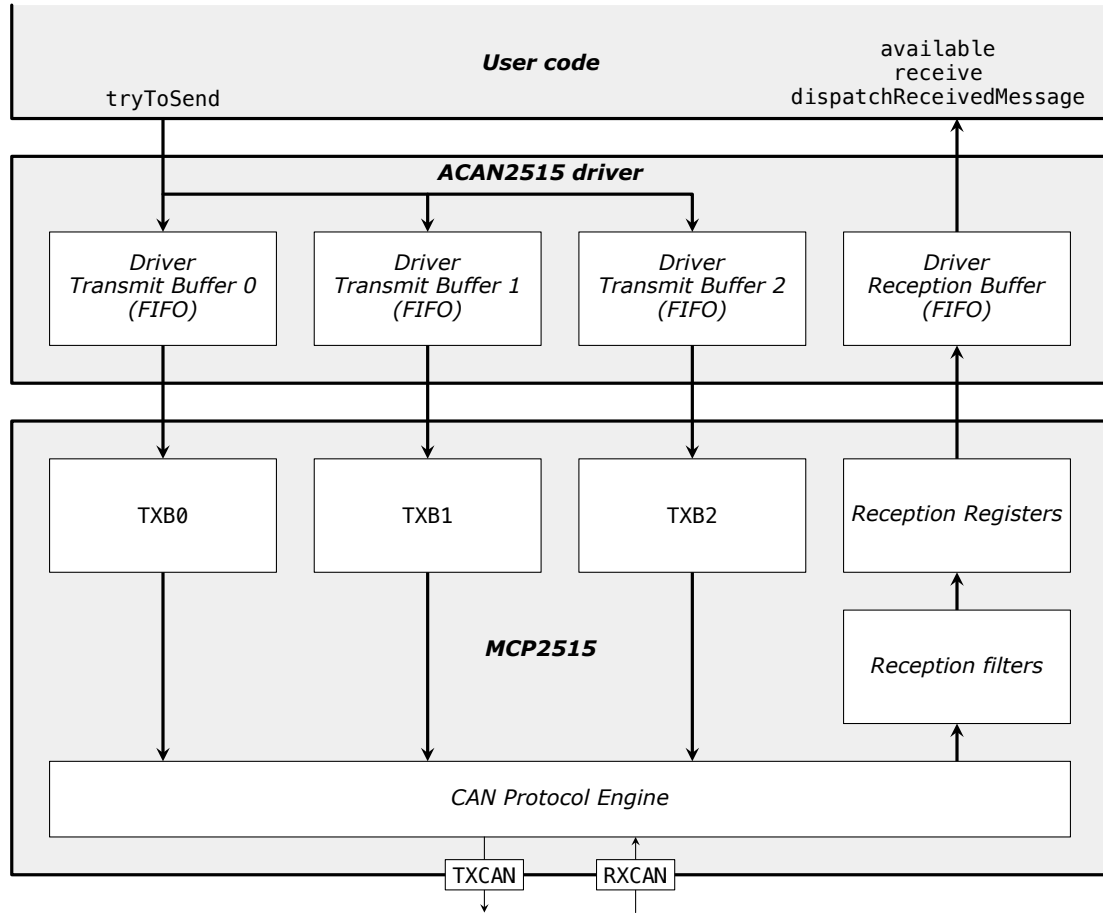


Figure 1 – Message flow in ACAN2515 driver and MCP2515 CAN Controller

Sequentiality. The ACAN2515 driver and the configuration of the MCP2515 controller can ensure sequentiality of data messages¹, under some conditions. The driver ensures the sequentiality of the emissions, provided that you use only one transmit buffer: if an user program calls `tryToSend` first for a message M_1 specifying the B_i buffer and then for a message M_2 specifying the same buffer, the driver ensures that M_1 will be sent on the CAN bus before M_2 . However, if M_2 specifies an other buffer, there is no guarantee that M_1 will appear on the bus before M_2 . In reception, the driver ensures sequentiality based on the reception filters: if a received message M_1 passes a given filter, and then a received message M_2 passes the same filter, then the messages are retrieved in this order by the `receive` or the `dispatchReceivedMessage` methods.

4 A simple example: LoopBackDemo

The following code is a sample code for introducing the ACAN2515 library, extracted from the LoopBackDemo sample code included in the library distribution. It runs natively on any Arduino compatible board, and is easily adaptable to any microcontroller supporting SPI. It demonstrates how to configure the driver, to send a CAN message, and to receive a CAN message.

¹Sequentiality means that if an user program calls `tryToSend` first for a message M_1 and then for a message M_2 , the message M_1 will be always retrieved by `receive` or `dispatchReceivedMessage` before the message M_2 .

Note: this code runs without any CAN transceiver (the TXCAN and RXCAN pins of the MCP2515 are left open), the MCP2515 is configured with the *loop back* setting on.

```
#include <ACAN2515.h>
```

This line includes the ACAN2515 library.

```
static const byte MCP2515_SCK = 27 ; // SCK input of MCP2515
static const byte MCP2515_SI  = 28 ; // SI input of MCP2515
static const byte MCP2515_SO  = 39 ; // SO output of MCP2515
```

Define the SPI alternate pins. This is actually required if you uses SPI alternate pins.

```
static const byte MCP2515_CS = 20 ; // CS input of MCP2515
static const byte MCP2515_INT = 37 ; // INT output of MCP2515
```

Define the pins connected to \overline{CS} and \overline{INT} pins.

```
ACAN2515 can (MCP2515_CS, SPI, MCP2515_INT) ;
```

Instanciation of the ACAN2515 library, declaration and initialization of the can object that implements the driver. The constructor names: the number of the pin connected to the \overline{CS} pin, the SPI object (you can use SPI1, SPI2, ...), the number of the pin connected to the \overline{INT} pin.

```
static const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
```

Specifies the frequency of the MCP2515 quartz.

```
void setup () {
  //--- Switch on builtin led
  pinMode (LED_BUILTIN, OUTPUT) ;
  digitalWrite (LED_BUILTIN, HIGH) ;
  //--- Start serial
  Serial.begin (38400) ;
  //--- Wait for serial (blink led at 10 Hz during waiting)
  while (!Serial) {
    delay (50) ;
    digitalWrite (LED_BUILTIN, !digitalRead (LED_BUILTIN)) ;
  }
}
```

Builtin led is used for signaling. It blinks led at 10 Hz during until serial monitor is ready.

```
SPI.begin () ;
```

You should call SPI.begin. Many platforms define alternate pins for SPI. On Teensy 3.x ([section 6.1 page 10](#)), selecting alternate pins should be done before calling SPI.begin, on Adafruit Feather M0 ([section 6.2 page 11](#)), this should be done after. Calling SPI.begin explicitly allows you to fully handle alternate pins.

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
```

Configuration is a four-step operation. This line is the first step. It instantiates the settings object of the ACAN2515Settings class. The constructor has two parameters: the MCP2515 quartz frequency, and the desired CAN bit rate (here, 125 kb/s). It returns a settings object fully initialized with CAN bit settings for the desired bit rate, and default values for other configuration properties.

```
settings.mRequestedMode = ACAN2515Settings::LoopBackMode ;
```

This is the second step. You can override the values of the properties of settings object. Here, the `mRequestedMode` property is set to `LoopBackMode` – its value is `NormalMode` by default. Setting this property enables *loop back*, that is you can run this demo sketch even if you have no connection to a physical CAN network. The [section 16.8 page 38](#) lists all properties you can override.

```
const uint16_t errorCode = can.begin (settings, [] { can.isr () ; } ) ;
```

This is the third step, configuration of the can driver with settings values. The driver is configured for being able to send any (standard / extended, data / remote) frame, and to receive all (standard / extended, data / remote) frames. If you want to define reception filters, see [section 9 page 18](#). The second argument is the *interrupt service routine*, and is defined by a C++ lambda expression². See [section 11.2 page 24](#) for using a function instead.

```
if (errorCode != 0) {
    Serial.print ("Configuration error 0x") ;
    Serial.println (errorCode, HEX) ;
}
}
```

Last step: the configuration of the can driver returns an error code, stored in the `errorCode` constant. It has the value 0 if all is ok – see [section 11.3 page 24](#).

```
static uint32_t gBlinkLedDate = 0 ;
static uint32_t gReceivedFrameCount = 0 ;
static uint32_t gSentFrameCount = 0 ;
```

The `gSendDate` global variable is used for sending a CAN message every 2 s. The `gSentCount` global variable counts the number of sent messages. The `gReceivedCount` global variable counts the number of received messages.

```
void loop() {
    CANMessage frame ;
```

The message object is fully initialized by the default constructor, it represents a standard data frame, with an identifier equal to 0, and without any data – see [section 5 page 9](#).

```
if (gBlinkLedDate < millis ()) {
    gBlinkLedDate += 2000 ;
    digitalWrite (LED_BUILTIN, !digitalRead (LED_BUILTIN)) ;
    const bool ok = can.tryToSend (frame) ;
    if (ok) {
        gSentFrameCount += 1 ;
        Serial.print ("Sent: ") ;
        Serial.println (gSentFrameCount) ;
    }else{
        Serial.println ("Send failure") ;
    }
}
}
```

We try to send the data message. Actually, we try to transfer it into the *Driver transmit buffer*. The transfer succeeds if the buffer is not full. The `tryToSend` method returns `false` if the buffer is full, and `true` otherwise. Note the returned value only tells if the transfer into the *Driver transmit buffer* is successful or not: we have no way to know if the frame is actually sent on the the CAN network. Then, we act the successful transfer by setting `gSendDate` to the next send date and incrementing

²<https://en.cppreference.com/w/cpp/language/lambda>

the `gSentCount` variable. Note if the transfer did fail, the send date is not changed, so the `tryToSend` method will be called on the execution of the `loop` function.

```
if (can.available ()) {
    can.receive (frame) ;
    gReceivedFrameCount ++ ;
    Serial.print ("Received: ") ;
    Serial.println (gReceivedFrameCount) ;
}
}
```

As the MCP2515 controller is configured in *loop back* mode, all sent messages are received. The receive method returns false if no message is available from the *driver reception buffer*. It returns true if a message has been successfully removed from the *driver reception buffer*. This message is assigned to the message object. If a message has been received, the `gReceivedCount` is incremented and displayed.

5 The CANMessage class

Note. The `CANMessage` class is declared in the `CANMessage.h` header file. The class declaration is protected by an include guard that causes the macro `GENERIC_CAN_MESSAGE_DEFINED` to be defined. The ACAN³ (version 1.0.3 and above) driver, the ACAN2517⁴ driver contain an identical `CANMessage.h` file header, enabling using ACAN driver, ACAN2515 driver and ACAN2517 driver in a same sketch.

A *CAN message* is an object that contains all CAN frame user informations. All properties are initialized by default, and represent a standard data frame, with an identifier equal to 0, and without any data.

```
class CANMessage {
public : uint32_t id = 0 ; // Frame identifier
public : bool ext = false ; // false -> standard frame, true -> extended frame
public : bool rtr = false ; // false -> data frame, true -> remote frame
public : uint8_t idx = 0 ; // Used by the driver
public : uint8_t len = 0 ; // Length of data (0 ... 8)
public : union {
    uint64_t data64 ; // Caution: subject to endianness
    uint32_t data32 [2] ; // Caution: subject to endianness
    uint16_t data16 [4] ; // Caution: subject to endianness
    uint8_t data [8] = {0, 0, 0, 0, 0, 0, 0, 0} ;
} ;
} ;
```

Note the message datas are defined by an **union**. So message datas can be seen as eight bytes, four 16-bit unsigned integers, two 32-bit, or one 64-bit. Be aware that multi-byte integers are subject to endianness (Cortex M4 processors of Teensy 3.x are little-endian).

The `idx` property is not used in CAN frames, but:

- for a received message, it contains the acceptance filter index (see [section 10 page 23](#));
- on sending messages, it is used for selecting the transmit buffer (see [section 7.1 page 15](#)).

³The ACAN driver is a CAN driver for FlexCAN modules integrated in the Teensy 3.x microcontrollers, <https://github.com/pierremolinaro/acan>.

⁴The ACAN2517 driver is a CAN driver for the MCP2517 CAN controller, <https://github.com/pierremolinaro/acan2517>.

6 Connecting a MCP2515 to your microcontroller

Connecting a MCP2515 requires 5 pins (figure 2):

- hardware SPI requires you use dedicated pins of your microcontroller. You can use alternate pins (see below), and if your microcontroller supports several hardware SPIs, you can select any of them;
- connecting the $\overline{\text{CS}}$ signal requires one digital pin, that the driver configures as an OUTPUT ;
- connecting the $\overline{\text{INT}}$ signal requires one other digital pin, that the driver configures as an external interrupt input; so this pin should have interrupt capability (checked by the begin method of the driver object).

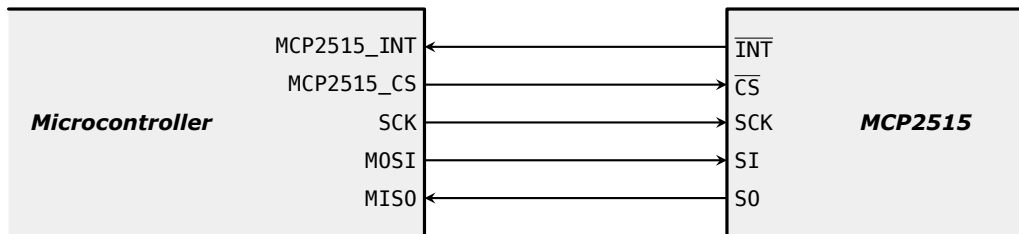


Figure 2 – MCP2515 connection to a microcontroller

The begin function of ACAN2515 library configures the selected SPI with a frequency of 10 Mbit/s (the maximum frequency supported by the MCP2515). More precisely, the SPI library of your microcontroller may adopt a frequency lower than 10 Mbit/s; for example, the maximum frequency of the Arduino Uno SPI is 8 Mbit/s.

6.1 Using alternate pins on Teensy 3.x

Demo sketch: LoopBackDemoTeensy3x.

On Teensy 3.x, "the main SPI pins are enabled by default. SPI pins can be moved to their alternate position with `SPI.setMOSI(pin)`, `SPI.setMISO(pin)`, and `SPI.setSCK(pin)`. You can move all of them, or just the ones that conflict, as you prefer."⁵

For example, the LoopBackDemoTeensy3x sketch uses SPI0 on a Teensy 3.5 with these alternate pins⁶:

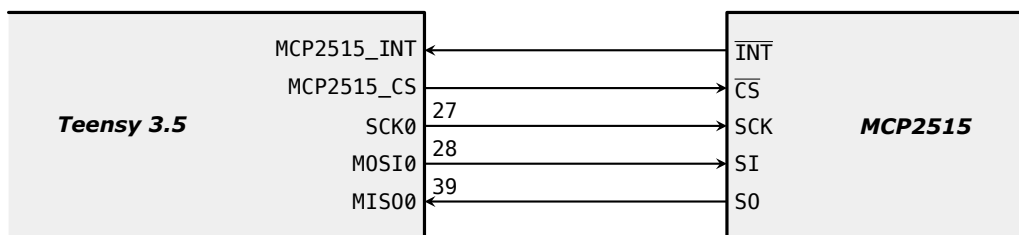


Figure 3 – Using SPI alternate pins on a Teensy 3.5

⁵See https://www.pjrc.com/teensy/td_libs_SPI.html

⁶See <https://www.pjrc.com/teensy/pinout.html>

6.2 Using alternate pins on an Adafruit Feather M0 CONNECTING A MCP2515 TO YOUR MICROCONTROLLER

You call the `SPI.setMOSI`, `SPI.setMISO`, and `SPI.setSCK` functions **before** calling the `begin` function of your `ACAN2515` instance (generally done in the `setup` function):

```
ACAN2515 can (MCP2515_CS, SPI, MCP2515_INT) ;
...
static const byte MCP2515_SCK = 27 ; // SCK input of MCP2515
static const byte MCP2515_SI  = 28 ; // SI input of MCP2515
static const byte MCP2515_SO  = 39 ; // SO output of MCP2515
...
void setup () {
    ...
    SPI.setMOSI (MCP2515_SI) ;
    SPI.setMISO (MCP2515_SO) ;
    SPI.setSCK (MCP2515_SCK) ;
    SPI.begin () ;
    ...
    const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
    ...
}
```

Note you can use the `SPI.pinIsMOSI`, `SPI.pinIsMISO`, and `SPI.pinIsSCK` functions to check if the alternate pins you select are valid:

```
void setup () {
    ...
    Serial.print ("Using pin #") ;
    Serial.print (MCP2515_SI) ;
    Serial.print (" for MOSI: ") ;
    Serial.println (SPI.pinIsMOSI (MCP2515_SI) ? "yes" : "NO!!!") ;
    Serial.print ("Using pin #") ;
    Serial.print (MCP2515_SO) ;
    Serial.print (" for MISO: ") ;
    Serial.println (SPI.pinIsMISO (MCP2515_SO) ? "yes" : "NO!!!") ;
    Serial.print ("Using pin #") ;
    Serial.print (MCP2515_SCK) ;
    Serial.print (" for SCK: ") ;
    Serial.println (SPI.pinIsSCK (MCP2515_SCK) ? "yes" : "NO!!!") ;
    SPI.setMOSI (MCP2515_SI) ;
    SPI.setMISO (MCP2515_SO) ;
    SPI.setSCK (MCP2515_SCK) ;
    SPI.begin () ;
    ...
    const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
    ...
}
```

6.2 Using alternate pins on an Adafruit Feather M0

Demo sketch: `LoopBackDemoAdafruitFeatherM0`.

See <https://learn.adafruit.com/using-atsamd21-sercom-to-add-more-spi-i2c-serial-ports/overview> document that explains in details how configure and set an alternate SPI on Adafruit Feather M0.

For example, the `LoopBackDemoAdafruitFeatherM0` sketch uses `SERCOM1` on an Adafruit Feather M0 as illustrated in [figure 4](#).

The configuration code is the following. Note you should call the `pinPeripheral` function **after** calling the `mySPI.begin` function.

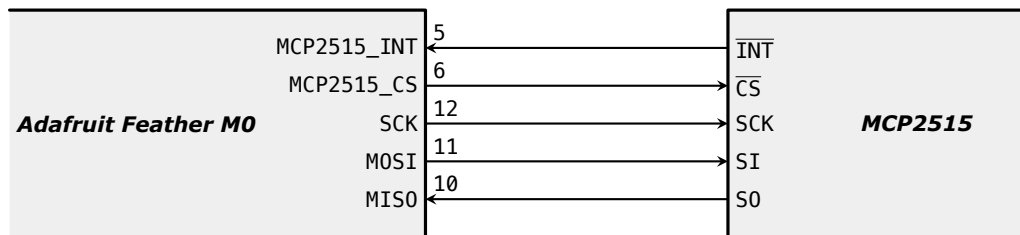


Figure 4 – Using SPI alternate pins on an Adafruit Feather M0

```

#include <wiring_private.h>
...
static const byte MCP2515_SCK = 12 ; // SCK pin, SCK input of MCP2515
static const byte MCP2515_SI  = 11 ; // MOSI pin, SI input of MCP2515
static const byte MCP2515_SO  = 10 ; // MISO pin, SO output of MCP2515
...
SPIClass mySPI (&sercom1,
                MCP2515_SO, MCP2515_SI, MCP2515_SCK,
                SPI_PAD_0_SCK_3, SERCOM_RX_PAD_2);
...
static const byte MCP2515_CS  = 6 ; // CS input of MCP2515
static const byte MCP2515_INT = 5 ; // INT output of MCP2515
...
ACAN2515 can (MCP2515_CS, mySPI, MCP2515_INT) ;
...
void setup () {
  ...
  mySPI.begin () ;
  pinPeripheral (MCP2515_SI, PIO_SERCOM);
  pinPeripheral (MCP2515_SCK, PIO_SERCOM);
  pinPeripheral (MCP2515_SO, PIO_SERCOM);
  ...
  const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
  ...
}

```

6.3 Connecting to an ESP32

Demo sketches: LoopBackDemoESP32 and LoopBackESP32-intensive. See also the ESP32 demo sketch SPI_Multiple_Busses.

Link: <https://randomnerdtutorials.com/esp32-pinout-reference-gpios/>

Two ESP32 SPI busses are available in Arduino, HSPI and VSPI. By default, Arduino SPI is VSPI. The ESP32 default pins are given in [table 1](#).

Port	SCK	MOSI	MISO
VSPI	I018	I023	I019
HSPI	I014	I013	I012

Table 1 – ESP32 SPI default pins

6.3.1 Connecting MCP2515_CS and MCP2515_INT

For MCP2515_CS, you can use any port that can be configured as digital output. ACAN2515 does not support hardware chip select. For MCP2515_INT, you can use any port that can be configured as digital input, as ESP32 provides interrupt capability on any input pin.

Note. I034 to I039 are input only pins, without internal pullup or pulldown. So you cannot use these pins for MCP2515_CS.

6.3.2 Using SPI

Default SPI (i.e. VSPI) pins are: SCK=18, MISO=19, MOSI=23 (figure 5).

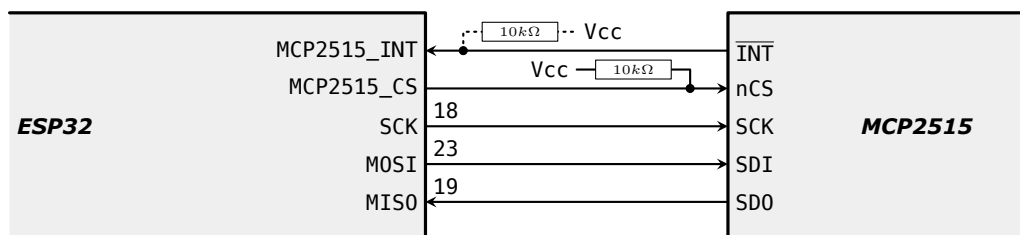


Figure 5 – Using VSPI default pins on an ESP32

You can change the default pins with additional arguments (up to three) for `SPI.begin` :

```
SPI.begin (SCK_PIN) ; // Uses MISO and MOSI default pins
```

or

```
SPI.begin (SCK_PIN, MISO_PIN) ; // Uses MOSI default pin
```

or

```
SPI.begin (SCK_PIN, MISO_PIN, MOSI_PIN) ;
```

Note that `SPI.begin` accepts a fourth argument, for CS pin. Do not use this feature with ACAN2517.

6.3.3 Using HSPI

The ESP32 demo sketch `SPI_Multiple_Busses` shows how to use both HSPI and VSPI. However for ACAN2517, we proceed in a slightly different way:

```
#include <SPI.h>
....
SPIClass hspi (HSPI) ;
ACAN2515 can (MCP2515_CS, hspi, MCP2515_INT) ;
....
void setup () {
    ....
    hspi.begin () ; // You can also add parameters for not using default pins
    ....
}
```

You declare the `hspi` object before declaring the `can` object. You can change the `hspi` name, the important point is the HSPI argument that specifies the HSPI bus. Then, instead of using the `SPI` name, you use the `hspi` name in:

- can object declaration;
- in begin SPI instruction.

See the LoopBackESP32-intensive sketch for an example with VSPI.

6.4 Connection with no interrupt pin

See the LoopBackDemoTeensy3x-no-int and LoopBackDemoESP32-no-int sketches.

Note that not using an interruption is only valid if the message throughput is not too high. Received messages are recovered by polling, so the risk of MCP2515 internal buffers overflowing is greater.

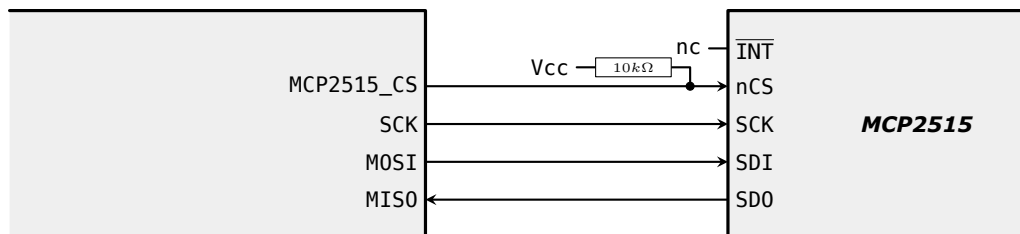


Figure 6 – Connection with no interrupt pin

For not using the interrupt signal, you should adapt your sketch as following:

1. the last argument of can constructor should be 255, meaning no interrupt pin;
2. the second argument of can.begin should be NULL (no interrupt service routine);
3. in the loop function, you should call can.poll as often as possible.

```
ACAN2515 can (MCP2515_CS, SPI, 255) ; // Last argument is 255 -> no interrupt pin

void setup () {
    ...
    const uint16_t errorCode = can.begin (settings, NULL) ; // ISR is null
    ...
}

void loop () {
    can.poll () ;
    ...
}
```

7 Sending frames

The ACAN2515 driver define three transmit buffers, each of them corresponding to a MCP2515 hardware buffer.

7.1 The tryToSend method

```
...
CANMessage message ;
// Setup message
const bool ok = can.tryToSend (message) ;
...
```

You call the tryToSend method for sending a message in the CAN network. Note this function returns before the message is actually sent; this function only appends the message to a transmit buffer.

The idx field of the message specifies the transmit buffer (0 → transmit buffer 0, 1 → transmit buffer 1, 2 → transmit buffer 2, any other value → transmit buffer 0). The default value of the idx field is zero: the message is sent through TXB0.

The method tryToSend returns:

- true if the message has been successfully transmitted to driver transmit buffer; note that does not mean that the CAN frame has been actually sent;
- false if the message has not been successfully transmitted to driver transmit buffer, it was full.

So it is wise to systematically test the returned value.

A way is to use a global variable to note if the message has been successfully transmitted to driver transmit buffer. For example, for sending a message every 2 seconds:

```
static uint32_t gSendDate = 0 ;

void loop () {
  if (gSendDate < millis ()) {
    CANMessage message ;
    // Initialize message properties
    const bool ok = can.tryToSend (message) ;
    if (ok) {
      gSendDate += 2000 ;
    }
  }
}
```

An other hint to use a global boolean variable as a flag that remains true while the message has not been sent.

```
static bool gSendMessage = false ;

void loop () {
  ...
  if (frame_should_be_sent) {
    gSendMessage = true ;
  }
  ...
  if (gSendMessage) {
    CANMessage message ;
    // Initialize message properties
    const bool ok = can.tryToSend (message) ;
    if (ok) {
      gSendMessage = false ;
    }
  }
}
```

```

    }
    ...
}

```

7.2 Driver transmit buffer sizes

By default:

- driver transmit buffer 0 size is 16;
- driver transmit buffer 1 and 2 sizes are 0.

You can change the default values by setting the `mTransmitBuffer0Size`, `mTransmitBuffer1Size`, `mTransmitBuffer2Size` properties of settings variable; for example:

```

ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
settings.mTransmitBuffer0Size = 30 ;
const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
...

```

A zero size is valid: calling the `tryToSend` method returns `true` if the corresponding TXBi register is empty, and `false` if it is full.

7.3 The `transmitBufferSize` method

The `transmitBufferSize` method has one argument, the index i of a driver transmit buffer ($0 \leq i \leq 2$). It returns the allocated size of this driver transmit buffer, that is the value of `settings.mTransmitBuffer i Size` when the `begin` method is called.

```

const uint16_t s = can.transmitBufferSize (1) ; // Driver transmit buffer 1

```

7.4 The `transmitBufferCount` method

The `transmitBufferCount` method has one argument, the index i of a driver transmit buffer ($0 \leq i \leq 2$). It returns the current number of messages in the driver transmit buffer i .

```

const uint16_t n = can.transmitBufferCount (0) ; // Driver transmit buffer 0

```

7.5 The `transmitBufferPeakCount` method

The `transmitBufferPeakCount` method has one argument, the index i of a driver transmit buffer ($0 \leq i \leq 2$). It returns the peak value of message count in the driver transmit buffer i .

```

const uint16_t max = can.transmitBufferPeakCount (2) ; // Driver transmit buffer 2

```

If the transmit buffer is full when `tryToSend` is called, the return value of this call is `false`. In such case, the following calls of `transmitBufferPeakCount(i)` will return `transmitBufferSize (i)+1`.

So, when `transmitBufferPeakCount(i)` returns a value lower or equal to `transmitBufferSize (i)`, it means that calls to `tryToSend` have always returned `true`, and no overflow occurs on driver transmit buffer i .

8 Retrieving received messages using the receive method

There are two ways for retrieving received messages :

- using the receive method, as explained in this section;
- using the `dispatchReceivedMessage` method (see [section 10 page 23](#)).

This is a basic example:

```
void loop () {
    CANMessage message ;
    if (can.receive (message)) {
        // Handle received message
    }
    ...
}
```

The receive method:

- returns false if the driver receive buffer is empty, message argument is not modified;
- returns true if a message has been removed from the driver receive buffer, and the message argument is assigned.

You need to manually dispatch the received messages. If you did not provide any receive filter, you should check the `rtr` bit (remote or data frame?), the `ext` bit (standard or extended frame), and the `id` (identifier value). The following snippet dispatches three messages:

```
void loop () {
    CANMessage message ;
    if (can.receive (message)) {
        if (!message.rtr && message.ext && (message.id == 0x123456)) {
            handle_myMessage_0 (message) ; // Extended data frame, id is 0x123456
        } else if (!message.rtr && !message.ext && (message.id == 0x234)) {
            handle_myMessage_1 (message) ; // Standard data frame, id is 0x234
        } else if (message.rtr && !message.ext && (message.id == 0x542)) {
            handle_myMessage_2 (message) ; // Standard remote frame, id is 0x542
        }
    }
    ...
}
```

The `handle_myMessage_0` function has the following header:

```
void handle_myMessage_0 (const CANMessage & inMessage) {
    ...
}
```

So are the header of the `handle_myMessage_1` and the `handle_myMessage_2` functions.

8.1 Driver receive buffer size

By default, the driver receive buffer size is 32. You can change it by setting the `mReceiveBufferSize` property of settings variable before calling the `begin` method:

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
settings.mReceiveBufferSize = 100 ;
const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
...
```

As the size of CANMessage class is 16 bytes, the actual size of the driver receive buffer is the value of settings.mReceiveBufferSize * 16.

8.2 The receiveBufferSize method

The receiveBufferSize method returns the size of the driver receive buffer, that is the value of the mReceiveBufferSize property of settings variable when the the begin method is called.

```
const uint16_t s = can.receiveBufferSize () ;
```

8.3 The receiveBufferCount method

The receiveBufferCount method returns the current number of messages in the driver receive buffer.

```
const uint16_t n = can.receiveBufferCount () ;
```

8.4 The receiveBufferPeakCount method

The receiveBufferPeakCount method returns the peak value of message count in the driver receive buffer.

```
const uint16_t max = can.receiveBufferPeakCount () ;
```

Note the driver receive buffer can overflow, if messages are not retrieved (by calling the receive or the dispatchReceivedMessage methods). If an overflow occurs, further calls of can.receiveBufferPeakCount () return can.receiveBufferSize ()+1.

9 Acceptance filters

It is recommended to read the Microchip documentation DS20001801H, section 4.5 page 33. The [figure 7](#) shows the MCP2515 acceptance filter registers.

9.1 Default behaviour

The can.begin (settings, [] can.isr () ;) method sets the RXM0 and RXM1 registers to 0, so, the MCP2515 receives all CAN bus messages.

More precisely, as RXM0 is zero, all messages are received in RXB0. If a new message is received when RXB0 is full, the new message is transferred in RXB1. If RXB1 is full, the new message is lost.

You can set the mRolloverEnable property of your ACAN2515Settings object to false (it is true by default) to change this default behaviour. When mRolloverEnable is set to false, if a new message is received when RXB0 is full, the new message is lost.

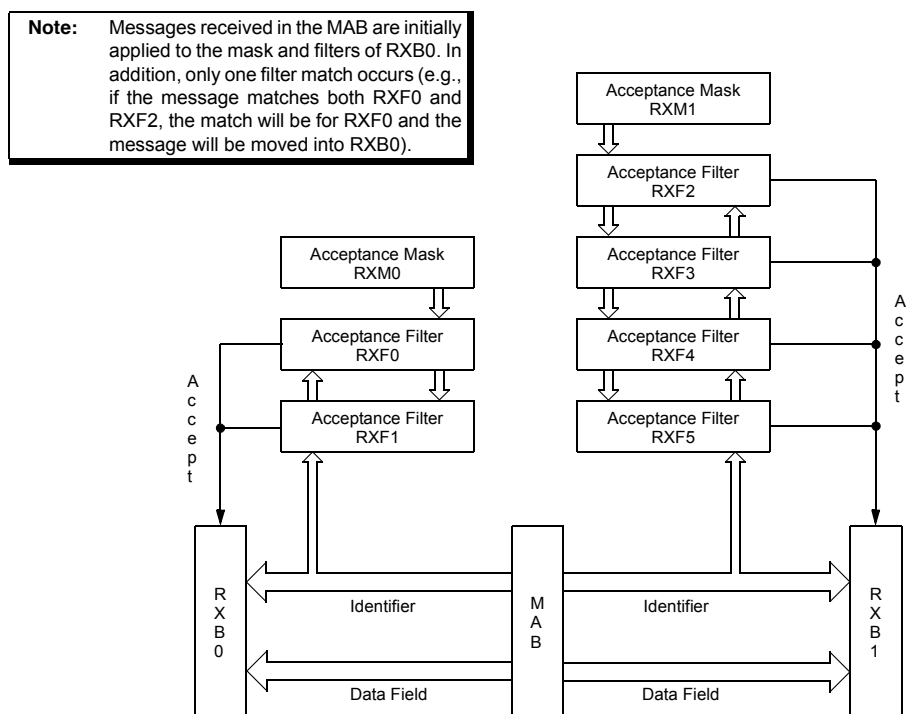


Figure 7 – MCP2515 acceptance filters (DS20001801H, figure 4.2 page 25)

9.2 Defining filters

Sample sketch: the `loopbackUsingFilters` sketch shows how defining filters.

For defining filters, you should:

- define the values for the RXM0 and RXM1 acceptance masks;
- submitting an `ACAN2515AcceptanceFilter` array to the `ACAN2515::begin` method.

The `ACAN2515AcceptanceFilter` array defines the values that the `ACAN2515::begin` method sets to the `RXFi` acceptance filter registers.

Four functions are available for managing filters:

- `standard2515Mask` and `extended2515Mask` functions for defining $RXMi$ value;
- `standard2515Filter` and `extended2515Filter` functions for defining RXF_i value.

RXM*i* and RXF*i* values you handle are ACAN2515Mask class instances, that provides four uint8_t properties: mSIDH, mSIDL, mEID8, mEID0. They correspond to the MCP2515 registers. If you want, you can set directly these properties, without using the above functions.

Filter remote and data frames. The MCP2515 filters do not handle the RTR bit: for example, you cannot specify you want to accept data frames and discard remote frames. This should be done by your code.

Multiple filter matches. From DS20001801H, section 4.5.4 page 34: *If more than one acceptance filter matches, the FILHITn bits will encode the binary value of the lowest numbered filter that*

matched. For example, if filters, RXF2 and RXF4, match, the FILHITn bits will be loaded with the value for RXF2. This essentially prioritizes the acceptance filters with a lower numbered filter having higher priority. Messages are compared to filters in ascending order of filter number. This also ensures that the message will only be received into one buffer. This implies that RXB0 has a higher priority than RXB1.

The MCP2515 filters cannot be disabled, so all mask registers can be taken into account during the acceptance of a message. For example, if MCP2515 filters are defined with the RXM0, RXF0, RXF1 registers, leaving RXM1 equal to 0 provides the transfer to RXB1 of all messages discarded by RXF0 and RXF1.

For dealing with all situations, the ACAN2515::begin method accepts three prototypes.

9.2.1 No filter

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
```

No filter is provided, RXM0 and RXM1 are set to 0, enabling the acceptance of all messages by RXB0.

9.2.2 One filter

For example:

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515AcceptanceFilter filter [] = {
    {extended2515Filter (0x12345678), receive0} // RXF0
} ;
const uint16_t errorCode = can.begin (settings,
                                     [] { can.isr () ; },
                                     rxm0, // Value set to RXM0 register
                                     filter, // The filter array
                                     1) ; // Filter array size
```

Here, one type of message is accepted, extended (data or remote) frames with an identifier equal to 0x12345678. This defines explicitly RXM0 and RXF0; for disabling acceptance by RXF1, it is set with RXF0 value; RXM1 is set with RXM0 value, and the RXF2 to RXF5 registers are set with the RXF0 value. No message will be accepted by RXB1 filters.

The definition of a filter is associated with a call back function – here receive0. This function is called indirectly when the dispatchReceivedMessage method is called – see [section 10 page 23](#).

9.2.3 Two filters

For example:

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1} // RXF1
} ;
```

```
const uint16_t errorCode = can.begin (settings,
                                     [] { can.isr () ; },
                                     rxm0, // Value set to RXM0 register
                                     filters, // The filter array
                                     2) ; // Filter array size
```

Here, two types of message are accepted, extended (data or remote) frames with an identifier equal to 0x12345678 or 0x18765432. This defines explicitly RXM0, RXF0 and RXF1; RXM1 is set with RXM0 value, and the RXF2 to RXF5 registers are set with the RXF1 value. No message will be accepted by RXB1 filters.

9.2.4 Three to five filters

For example, with four filters:

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515Mask rxm1 = standard2515Mask (0x7FF, 0, 0) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1}, // RXF1
    {standard2515Filter (0x567, 0, 0), receive2}, // RXF2
    {standard2515Filter (0x123, 0, 0), receive3} // RXF3
} ;
const uint16_t errorCode = can.begin (settings,
                                     [] { can.isr () ; },
                                     rxm0, // Value set to RXM0 register
                                     rxm1, // Value set to RXM1 register
                                     filters, // The filter array
                                     4) ; // Filter array size
```

Four types of message are accepted, extended (data or remote) frames with an identifier equal to 0x12345678 or 0x18765432, and standard (data or remote) frames with an identifier equal to 0x567 or 0x123. The RXF4 and RXF5 registers are set with the RXF3 value.

9.2.5 Six filters

```
ACAN2515Settings settings (QUARTZ_FREQUENCY, 125 * 1000) ;
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515Mask rxm1 = standard2515Mask (0x7FF, 0, 0) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1}, // RXF1
    {standard2515Filter (0x567, 0, 0), receive2}, // RXF2
    {standard2515Filter (0x123, 0, 0), receive3}, // RXF3
    {standard2515Filter (0x777, 0, 0), receive4}, // RXF4
    {standard2515Filter (0x3AB, 0, 0), receive5} // RXF5
} ;
const uint16_t errorCode = can.begin (settings,
                                     [] { can.isr () ; },
                                     rxm0, // Value set to RXM0 register
                                     rxm1, // Value set to RXM1 register
                                     filters, // The filter array
                                     6) ; // Filter array size
```

Six types of message are accepted, all filter registers are explicitly defined.

9.3 Extended frames acceptance

The `extended2515Mask` and `extended2515Filter` functions helps you to define extended frame filters. Extended frame filters test extended identifier value.

The acceptance criterion is⁷:

$$\text{acceptance_mask} \& (\text{received_identifier} \text{ nXOR } \text{acceptance_filter}) == 0$$

where `&` is the bit-wise *and* operator, and `nXOR` is the *not xor* bit-wise operator.

Accepting all extended frames.

```
const ACAN2515Mask rxm0 = extended2515Mask (0) ;
```

No extended frame identifier bit is tested, all extended frames are accepted.

Accepting individual extended frames.

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
```

All extended frame identifier bits are tested, only extended frames whose identifiers match the filters are accepted.

Accepting several identifiers. The bits at 0 of the mask correspond to bits that are not tested for acceptance. For example:

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFF0F) ;
```

If you define an acceptance filter by `extended2515Filter (0x12345608)`, any extended frame with an identifier equal to `0x123456x8` is accepted.

9.4 Standard frames acceptance

The `standard2515Mask` and `standard2515Filter` functions helps you to define extended frame filters. Standard frame filters test standard identifier value, first and second data byte.

The acceptance criterion is⁸:

$$\text{acceptance_mask} \& ((\text{received_identifier}, \text{data_byte}_0, \text{data_byte}_1) \text{ nXOR } \text{acceptance_filter}) == 0$$

where `&` is the bit-wise *and* operator, and `nXOR` is the *not xor* bit-wise operator.

Accepting all standard frames, without testing data bytes.

```
const ACAN2515Mask rxm0 = standard2515Mask (0, 0, 0) ;
```

Accepting individual standard frames, without testing data bytes.

```
const ACAN2515Mask rxm0 = standard2515Mask (0x7FF, 0, 0) ;
```

⁷See DS20001801H, section 4.5 *Message Acceptance Filters and Masks*, page 33.

⁸See DS20001801H, section 4.5 *Message Acceptance Filters and Masks*, page 33.

All standard frame identifier bits are tested, only standard frames whose identifiers match the filters are accepted.

Accepting several identifiers, without testing data bytes. The bits at 0 of the mask correspond to bits that are not tested for acceptance. For example:

```
const ACAN2515Mask rxm0 = standard2515Mask (0x70F, 0, 0) ;
```

If you define an acceptance filter by `standard2515Filter (0x40A, 0, 0)`, any standard frame with an identifier equal to `0x4xA` is accepted.

Filtering from first data byte. The second argument of `standard2515Mask` specify first data byte filtering. For example:

```
const ACAN2515Mask rxm0 = standard2515Mask (0x70F, 0xFF, 0) ;
```

If you define an acceptance filter by `standard2515Filter (0x40A, 0x54, 0)`, any standard frame with an identifier equal to `0x4xA` and first byte equal to `0x54` is accepted.

Empty standard frame. An empty standard frame (without any data byte) is accepted, the filtering condition on the first data byte is ignored (see `loopbackFilterDataByte` sample sketch).

10 The `dispatchReceivedMessage` method

Sample sketch: the `loopbackUsingFilters` shows how using the `dispatchReceivedMessage` method.

Instead of calling the `receive` method, call the `dispatchReceivedMessage` method in your loop function. It calls the call back function associated with the matching filter.

If you have not defined any filter, do not use this function, call the `receive` method.

```
void loop () {
  can.dispatchReceivedMessage () ; // Do not use can.receive any more
  ...
}
```

The `dispatchReceivedMessage` method handles one message at a time. More precisely:

- if it returns `false`, the driver receive buffer was empty;
- if it returns `true`, the driver receive buffer was not empty, one message has been removed and dispatched.

So, the return value can be used for emptying and dispatching all received messages:

```
void loop () {
  while (can.dispatchReceivedMessage ()) {
  }
  ...
}
```

If a filter definition does not name a call back function, the corresponding messages are lost.

The `dispatchReceivedMessage` method has an optional argument – `NULL` by default: a function name. This function is called for every message that pass the receive filters, with an argument equal to the matching filter index:

```

void filterMatchFunction (const uint8_t inFilterIndex) {
    ...
}

void loop () {
    can.dispatchReceivedMessage (filterMatchFunction) ;
    ...
}

```

You can use this function for maintaining statistics about receiver filter matches.

11 The ACAN2515::begin method reference

11.1 The ACAN2515::begin method prototypes

There are three begin method prototypes:

```

uint16_t ACAN2515::begin (const ACAN2515Settings & inSettings,
                          void (* inInterruptServiceRoutine) (void)) ;

```

```

uint16_t ACAN2515::begin (const ACAN2515Settings & inSettings,
                          void (* inInterruptServiceRoutine) (void),
                          const ACAN2515Mask inRXM0,
                          const ACAN2515AcceptanceFilter inAcceptanceFilters [],
                          const uint32_t inAcceptanceFilterCount) ;

```

```

uint16_t ACAN2515::begin (const ACAN2515Settings & inSettings,
                          void (* inInterruptServiceRoutine) (void),
                          const ACAN2515Mask inRXM0,
                          const ACAN2515Mask inRXM1,
                          const ACAN2515AcceptanceFilter inAcceptanceFilters [],
                          const uint32_t inAcceptanceFilterCount) ;

```

11.2 Defining explicitly the interrupt service routine

In this document, the *interrupt service routine* is defined by a lambda expression:

```

const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;

```

Instead of a lambda expression, you are free to define the *interrupt service routine* as a function:

```

void canISR () {
    can.isr () ;
}

```

And you pass canISR as argument to the begin method:

```

const uint16_t errorCode = can.begin (settings, canISR) ;

```

11.3 The error code

The ACAN2515::begin and ACAN2515::setFiltersOnTheFly methods return an error code. The value 0 denotes no error. Otherwise, you consider every bit as an error flag, as described in [table](#)

2. An error code could report several errors. The ACAN2515 class defines static constants for naming errors.

Bit	Static constant Name	Link
0	kNoMCP2515	section 11.3.1 page 25
1	kTooFarFromDesiredBitRate	section 11.3.2 page 25
2	kInconsistentBitRateSettings	section 11.3.3 page 25
3	kINTPinIsNotAnInterrupt	section 11.3.4 page 25
4	kISRIsNull	section 11.3.5 page 26
5	kRequestedModeTimeOut	section 11.3.6 page 26
6	kAcceptanceFilterArrayIsNull	section 11.3.7 page 26
7	kOneFilterMaskRequiresOneOrTwoAcceptanceFilters	section 11.3.8 page 26
8	kTwoFilterMasksRequireThreeToSixAcceptanceFilters	section 11.3.9 page 26
9	kCannotAllocateReceiveBuffer	section 11.3.10 page 26
10	kCannotAllocateTransmitBuffer0	section 11.3.11 page 26
11	kCannotAllocateTransmitBuffer1	section 11.3.12 page 27
12	kCannotAllocateTransmitBuffer2	section 11.3.13 page 27
13	kISRNotNullAndNoIntPin	section 11.3.14 page 27

Table 2 – The ACAN2515::begin method error code bits

11.3.1 kNoMCP2515

The ACAN2515::begin method checks accessibility by writing and reading back the CNF1_REGISTER first with the 0x55 value, then with the 0xAA value. This error is raised when the read value is different from the written one. It means that the MCP2515 cannot be accessed via SPI.

11.3.2 kTooFarFromDesiredBitRate

This error occurs when the mBitRateClosedToDesiredRate property of the settings object is false. This means that the ACAN2515Settings constructor cannot compute a CAN bit configuration close enough to the desired bit rate. For example:

```
void setup () {
  ACAN2515Settings settings (QUARTZ_FREQUENCY, 1) ; // 1 bit/s !!!
  // Here, settings.mBitRateClosedToDesiredRate is false
  const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ;
  // Here, errorCode contains ACAN2515::kCANBitConfigurationTooFarFromDesiredBitRate
}
```

11.3.3 kInconsistentBitRateSettings

The ACAN2515Settings constructor always returns consistent bit rate settings – even if the settings provide a bit rate too far away the desired bit rate. So this error occurs only when you have changed the CAN bit properties (mBitRatePrescaler, mPropagationSegment, mPhaseSegment1, mPhaseSegment2, mSJW), and one or more resulting values are inconsistent. See [section 16.3 page 36](#).

11.3.4 kINTPinIsNotAnInterrupt

The pin you provide for handling the MCP2515 interrupt has no interrupt capability.

11.3.5 kISRIsNull

The interrupt service routine argument is NULL, you should provide a valid function.

11.3.6 kRequestedModeTimeout

During configuration by the ACAN2515::begin method, the MCP2515 is in the *configuration* mode. At this end of this process, the mode specified by the `inSettings.mRequestedMode` value is requested. The switch to this mode is not immediate, a register is repetitively read for checking the switch is done. This error is raised if the switch is not completed within a delay between 1 ms and 2 ms.

11.3.7 kAcceptanceFilterArrayIsNull

The ACAN2515::begin method you have called names the `inAcceptanceFilters` argument, but it is NULL.

11.3.8 kOneFilterMaskRequiresOneOrTwoAcceptanceFilters

The ACAN2515::begin method you have called names the `inRXM0` argument (but not `inRXM1`), you should provide the value 1 or 2 to the `inAcceptanceFilterCount` argument.

11.3.9 kTwoFilterMasksRequireThreeToSixAcceptanceFilters

The ACAN2515::begin method you have called names the `inRXM0` and the `inRXM1` arguments, you should provide the value 3 to 6 to the `inAcceptanceFilterCount` argument.

11.3.10 kCannotAllocateReceiveBuffer

There is not enough RAM left to allocate the receive buffer. Try to reduce its size (see [section 8.1 page 17](#)), and / or to reduce transmit buffer sizes ([section 7.2 page 16](#)).

Note a memory overflow is not always detected properly: dynamic allocation can be successful, leaving too little memory available for a later allocation of automatic variables, which can cause a crash.

11.3.11 kCannotAllocateTransmitBuffer0

There is not enough RAM left to allocate the transmit buffer 0. Try to reduce its size (see [section 7.2 page 16](#)), and / or to reduce receive buffer size ([section 8.1 page 17](#)).

Note a memory overflow is not always detected properly: dynamic allocation can be successful, leaving too little memory available for a later allocation of automatic variables, which can cause a crash.

11.3.12 kCannotAllocateTransmitBuffer1

There is not enough RAM left to allocate the transmit buffer 1. Try to reduce its size (see [section 7.2 page 16](#)), and / or to reduce receive buffer size ([section 8.1 page 17](#)).

Note a memory overflow is not always detected properly: dynamic allocation can be successful, leaving too little memory available for a later allocation of automatic variables, which can cause a crash.

11.3.13 kCannotAllocateTransmitBuffer2

There is not enough RAM left to allocate the transmit buffer 2. Try to reduce its size (see [section 7.2 page 16](#)), and / or to reduce receive buffer size ([section 8.1 page 17](#)).

Note a memory overflow is not always detected properly: dynamic allocation can be successful, leaving too little memory available for a later allocation of automatic variables, which can cause a crash.

11.3.14 kISRNotNullAndNoIntPin

This error occurs when you have no INT pin, and a not-null interrupt service routine:

```
ACAN2515 can (MCP2515_CS, SPI, 255) ; // Last argument is 255 -> no interrupt pin

void setup () {
    ...
    const uint16_t errorCode = can.begin (settings, [] { can.isr () ; }) ; // ISR is not null
    ...
}
```

Interrupt service routine should be NULL if no INT pin is defined:

```
ACAN2515 can (MCP2515_CS, SPI, 255) ; // Last argument is 255 -> no interrupt pin

void setup () {
    ...
    const uint16_t errorCode = can.begin (settings, NULL) ; // Ok, ISR is null
    ...
}
```

See the LoopBackDemoTeensy3x-no-int and LoopBackDemoESP32-no-int sketches.

12 The ACAN2515::changeModeOnTheFly function

Note. Available in release 2.0.0 and later.

```
uint16_t ACAN2515::
    changeModeOnTheFly (const ACAN2515Settings::RequestedMode inRequestedMode);
```

After the library has been initialized by a call to ACAN2515::begin that returns no errors (i.e. zero), you can call this function to change modes on the fly. It returns 0 if it succeeds. If it fails, it returns the kRequestedModeTimeout error, indicating that the requested mode cannot be reached within 2 ms (see [section 11.3.6 page 26](#)).

Note. The function preserves contents of the bits 0 ... 4 of the CANCTRL register.

13 The ACAN2515::setFiltersOnTheFly functions

Note. Available in release 2.0.0 and later.

There are three setFiltersOnTheFly method prototypes:

```
uint16_t ACAN2515::setFiltersOnTheFly (void);

uint16_t ACAN2515::
    setFiltersOnTheFly (const ACAN2515Mask inRXM0,
                        const ACAN2515AcceptanceFilter inAcceptanceFilters [],
                        const uint8_t inAcceptanceFilterCount) ;

uint16_t ACAN2515::
    setFiltersOnTheFly (const ACAN2515Mask inRXM0,
                        const ACAN2515Mask inRXM1,
                        const ACAN2515AcceptanceFilter inAcceptanceFilters [],
                        const uint8_t inAcceptanceFilterCount) ;
```

After the library has been initialized by a call to ACAN2515::begin that returns no errors (i.e. zero), you can call this function to change filters on the fly. It returns 0 if it succeeds. If it fails, it returns a non zero uint16_t value (see [section 11.3 page 24](#)).

The three setFiltersOnTheFly method prototypes correspond to the three begin method prototypes, they handle filter definition in the same way (see [section 9.2 page 19](#)).

13.1 No filter

```
const uint16_t errorCode = can.setFiltersOnTheFly () ;
```

No filter is provided, RXM0 and RXM1 are set to 0, enabling the acceptance of all messages by RXB0.

13.2 One filter

For example:

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515AcceptanceFilter filter [] = {
    {extended2515Filter (0x12345678), receive0} // RXF0
} ;
const uint16_t errorCode = can.setFiltersOnTheFly (
    rxm0, // Value set to RXM0 register
    filter, // The filter array
    1) ; // Filter array size
```

Here, one type of message is accepted, extended (data or remote) frames with an identifier equal to 0x12345678. This defines explicitly RXM0 and RXF0; for disabling acceptance by RXF1, it is set with RXF0 value; RXM1 is set with RXM0 value, and the RXF2 to RXF5 registers are set with the RXF0 value. No message will be accepted by RXB1 filters.

The definition of a filter is associated with a call back function – here receive0. This function is called indirectly when the dispatchReceivedMessage method is called – see [section 10 page 23](#).

13.3 Two filters

For example:

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1} // RXF1
} ;
const uint16_t errorCode = can.setFiltersOnTheFly (
    rxm0, // Value set to RXM0 register
    filters, // The filter array
    2) ; // Filter array size
```

Here, two types of message are accepted, extended (data or remote) frames with an identifier equal to 0x12345678 or 0x18765432. This defines explicitly RXM0, RXF0 and RXF1; RXM1 is set with RXM0 value, and the RXF2 to RXF5 registers are set with the RXF1 value. No message will be accepted by RXB1 filters.

13.4 Three to five filters

For example, with four filters:

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515Mask rxm1 = standard2515Mask (0x7FF, 0, 0) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1}, // RXF1
    {standard2515Filter (0x567, 0, 0), receive2}, // RXF2
    {standard2515Filter (0x123, 0, 0), receive3} // RXF3
} ;
const uint16_t errorCode = can.setFiltersOnTheFly (
    rxm0, // Value set to RXM0 register
    rxm1, // Value set to RXM1 register
    filters, // The filter array
    4) ; // Filter array size
```

Four types of message are accepted, extended (data or remote) frames with an identifier equal to 0x12345678 or 0x18765432, and standard (data or remote) frames with an identifier equal to 0x567 or 0x123. The RXF4 and RXF5 registers are set with the RXF3 value.

13.5 Six filters

```
const ACAN2515Mask rxm0 = extended2515Mask (0x1FFFFFFF) ;
const ACAN2515Mask rxm1 = standard2515Mask (0x7FF, 0, 0) ;
const ACAN2515AcceptanceFilter filters [] = {
    {extended2515Filter (0x12345678), receive0}, // RXF0
    {extended2515Filter (0x18765432), receive1}, // RXF1
    {standard2515Filter (0x567, 0, 0), receive2}, // RXF2
    {standard2515Filter (0x123, 0, 0), receive3}, // RXF3
    {standard2515Filter (0x777, 0, 0), receive4}, // RXF4
    {standard2515Filter (0x3AB, 0, 0), receive5} // RXF5
} ;
const uint16_t errorCode = can.setFiltersOnTheFly (
```

```
rxm0, // Value set to RXM0 register
rxm1, // Value set to RXM1 register
filters, // The filter array
6) ; // Filter array size
```

Six types of message are accepted, all filter registers are explicitly defined.

14 The ACAN2515::end method

Note. Available in release 2.0.0 and later.

```
void ACAN2515::end (void) ;
```

After the library has been initialized by a call to ACAN2515::begin that returns no errors (i.e. zero), you can call this function to reset the MCP2515. It also frees the driver transmit and receive buffers, and, if interrupt pin is actually used (i.e. its number is different from 255), detach interrupt from interrupt pin.

15 The ACAN2515 instance usage

The ACAN2515 instance usage graph is given in [figure 8](#).

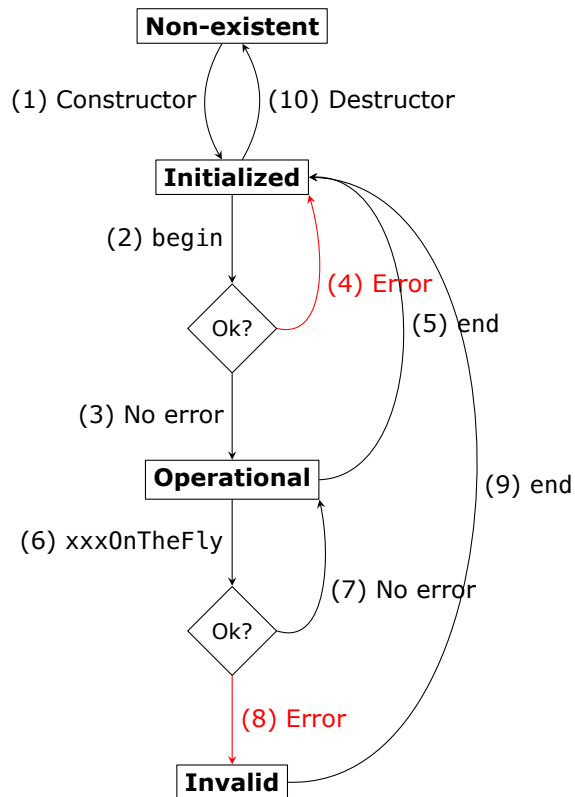


Figure 8 – ACAN2515 instance usage

The state are:

- **Non-existent**, the can object does not exist or is not initialized;
- **Initialized**, the can object is initialized;
- **Operational**, the can object is operational, you can use it from communication (functions tryToSend, available, receive, dispatchReceivedMessage, ...); note the actual possibilities depends from the requested mode: in ListenOnlyMode messages cannot be sent; in SleepMode no communication is handled.
- **Invalid**, a call of changeModeOnTheFly or setFiltersOnTheFly has returned an error, the can object should be reseted by a call to the endø function.

In many situations, only transitions (1), (2) and (3) are performed.

```
// Here, the can object does not exist ("Non-existent" state)
ACAN2515 can (...); // Performs (1)
// Here, can object is in "Initialized" state

void setup () {
    ...
    const uint16_t errorCode = can.begin (...); // Performs (2) (3) or (2) (4)
    // if errorCode is 0, can object is in "Operational" state;
    // otherwise, it remains in "Initialized" state.
    ...
}
```

16 ACAN2515Settings class reference

Note. The ACAN2515Settings class is not Arduino specific. You can compile it on your desktop computer with your favorite C++ compiler. In the <https://github.com/pierremolinaro/acan2515-dev> GitHub repository, a command line tool is defined for exploring all CAN bit rates from 1 bit/s and 20 Mbit/s for a 16 MHz quartz: 63810 bit rates are valid, and 29 are exact. It also checks that computed CAN bit decompositions are all consistent, even if they are too far from the desired baud rate.

16.1 First ACAN2515Settings constructor: computation of the CAN bit settings

The constructor of the ACAN2515Settings has two mandatory arguments: the quartz frequency, and the desired bit rate. It tries to compute the CAN bit settings for this bit rate. If it succeeds, the constructed object has its mBitRateClosedToDesiredRate property set to true, otherwise it is set to false. For example:

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000; // 16 MHz
void setup () {
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 1 * 1000 * 1000); // 1 Mbit/s
    // Here, settings.mBitRateClosedToDesiredRate is true
    ...
}
```

Of course, with a 16 MHz quartz, CAN bit computation always succeeds for classical bit rates: 1 Mbit/s, 500 kbit/s, 250 kbit/s, 125 kbit/s. But CAN bit computation can also succeed for some unusual bit rates, as 727 kbit/s. You can check the result by computing actual bit rate, and the distance from the desired bit rate:

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 727 * 1000) ; // 727 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    Serial.print ("actual bit rate: ") ;
    Serial.println (settings.actualBitRate ()) ; // 727272 bit/s
    Serial.print ("distance: ") ;
    Serial.println (settings.ppmFromDesiredBitRate ()) ; // 375 ppm
    ...
}

```

The actual bit rate is 727,272 bit/s, and its distance from desired bit rate is 375 ppm. "ppm" stands for "part-per-million", and 1 ppm = 10^{-6} . In other words, 10,000 ppm = 1%.

By default, a desired bit rate is accepted if the distance from the computed actual bit rate is lower or equal to 1,000 ppm = 0.1 %. You can change this default value by adding your own value as third argument of ACAN2515Settings constructor:

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 727 * 1000, 100) ;
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (--> is false)
    Serial.print ("actual bit rate: ") ;
    Serial.println (settings.actualBitRate ()) ; // 727272 bit/s
    Serial.print ("distance: ") ;
    Serial.println (settings.ppmFromDesiredBitRate ()) ; // 375 ppm
    ...
}

```

The third argument does not change the CAN bit computation, it only changes the acceptance test for setting the mBitRateClosedToDesiredRate property. For example, you can specify that you want the computed actual bit to be exactly the desired bit rate:

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 500 * 1000, 0) ; // Max distance is 0 ppm
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    Serial.print ("actual bit rate: ") ;
    Serial.println (settings.actualBitRate ()) ; // 500,000 bit/s
    Serial.print ("distance: ") ;
    Serial.println (settings.ppmFromDesiredBitRate ()) ; // 0 ppm
    ...
}

```

In any way, the bit rate computation always gives a consistent result, resulting an actual bit rate closest from the desired bit rate. For example:

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 440 * 1000) ; // 440 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (--> is false)

```



```

Serial.print ("actual bit rate: ");
Serial.println (settings.actualBitRate ()) ; // 444,444 bit/s
Serial.print ("distance: ");
Serial.println (settings.ppmFromDesiredBitRate ()) ; // 10,100 ppm
...
}

```

You can get the details of the CAN bit decomposition. For example:

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 440 * 1000) ; // 440 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ");
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (--> is false)
    Serial.print ("actual bit rate: ");
    Serial.println (settings.actualBitRate ()) ; // 444,444 bit/s
    Serial.print ("distance: ");
    Serial.println (settings.ppmFromDesiredBitRate ()) ; // 10,100 ppm
    Serial.print ("Bit rate prescaler: ");
    Serial.println (settings.mBitRatePrescaler) ; // BRP = 1
    Serial.print ("Propagation segment: ");
    Serial.println (settings.mPropagationSegment) ; // PropSeg = 6
    Serial.print ("Phase segment 1: ");
    Serial.println (settings.mPhaseSegment1) ; // PS1 = 5
    Serial.print ("Phase segment 2: ");
    Serial.println (settings.mPhaseSegment2) ; // PS2 = 6
    Serial.print ("Resynchronization Jump Width: ");
    Serial.println (settings.mSJW) ; // SJW = 4
    Serial.print ("Triple Sampling: ");
    Serial.println (settings.mTripleSampling) ; // 0, meaning single sampling
    Serial.print ("Sample Point: ");
    Serial.println (settings.samplePointFromBitStart ()) ; // 68, meaning 68%
    Serial.print ("Consistency: ");
    Serial.println (settings.CANBitSettingConsistency ()) ; // 0, meaning 0k
    ...
}

```

The samplePointFromBitStart method returns sample point, expressed in per-cent of the bit duration from the beginning of the bit.

Note the computation may calculate a bit decomposition too far from the desired bit rate, but it is always consistent. You can check this by calling the CANBitSettingConsistency method.

You can change the property values for adapting to the particularities of your CAN network propagation time. By example, you can increment the mPhaseSegment1 value, and decrement the mPhaseSegment2 value in order to sample the CAN Rx pin later.

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 500 * 1000) ; // 500 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ");
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    settings.mPhaseSegment1 ++ ; // 5 -> 6: safe, 1 <= PS1 <= 8
    settings.mPhaseSegment2 -- ; // 5 -> 4: safe, 2 <= PS2 <= 8 and SJW <= PS2
    Serial.print ("Sample Point: ");
    Serial.println (settings.samplePointFromBitStart ()) ; // 75, meaning 75%
}

```

16.2 Second ACAN2515Settings constructor: explicit CAN bit settings

```
Serial.print ("actual bit rate: ") ;
Serial.println (settings.actualBitRate ()) ; // 500000: ok, bit rate did not change
Serial.print ("Consistency: ") ;
Serial.println (settings.CANBitSettingConsistency ()) ; // 0, meaning Ok
...
}
```

Be aware to always respect CAN bit timing consistency! The constraints are:

$$\begin{aligned}1 &\leq \text{mBitRatePrescaler} \leq 64 \\1 &\leq \text{mSJW} \leq 4 \\1 &\leq \text{mPropagationSegment} \leq 8 \\ \text{Single sampling: } 1 &\leq \text{mPhaseSegment1} \leq 8 \\ \text{Triple sampling: } 2 &\leq \text{mPhaseSegment1} \leq 8 \\2 &\leq \text{mPhaseSegment2} \leq 8 \\ \text{mSJW} &< \text{mPhaseSegment2} \\ \text{mPhaseSegment2} &\leq \text{mPropagationSegment} + \text{mPhaseSegment1}\end{aligned}$$

Resulting actual bit rate is given by:

$$\text{Actual bit rate} = \frac{\text{QuartzFrequency} / 2}{\text{mBitRatePrescaler} \cdot (1 + \text{mPropagationSegment} + \text{mPhaseSegment1} + \text{mPhaseSegment2})}$$

And sampling points (in per-cent unit) are given by:

$$\text{Sampling point (single sampling)} = 100 \cdot \frac{1 + \text{mPropagationSegment} + \text{mPhaseSegment1}}{1 + \text{mPropagationSegment} + \text{mPhaseSegment1} + \text{mPhaseSegment2}}$$

$$\text{Sampling first point (triple sampling)} = 100 \cdot \frac{\text{mPropagationSegment} + \text{mPhaseSegment1}}{1 + \text{mPropagationSegment} + \text{mPhaseSegment1} + \text{mPhaseSegment2}}$$

16.2 Second ACAN2515Settings constructor: explicit CAN bit settings

New in release 1.0.4. This ACAN2515Settings constructor defines explicitly CAN bit settings. For example, see the LoopBackDemoBitRateSettings sketch :

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
  ACAN2515Settings settings (QUARTZ_FREQUENCY, // For computing actual bit rate
    4, // Bit rate prescaler, 1...64
    5, // Propagation Segment, 1...8
    5, // Phase Segment1, 1...8
    5, // Phase Segment2, 2...8
    4) ; // SJW, 1...4
  ...
}
```

This constructor requires six arguments :

1. inQuartzFrequency: the quartz frequency (uint32_t); note the quartz frequency is only used

for computing actual bit rate;

2. inBitRatePrescaler: the bit rate prescaler (uint8_t);
3. inPropagationSegment: the propagation segment (uint8_t);
4. inPhaseSegment1: the phase segment 1 (uint8_t);
5. inPhaseSegment2: the phase segment 2 (uint8_t);
6. inSJW: the Synchronization Jump Width (uint8_t).

By default, *single sampling* is selected. Set mTripleSampling to true is you want *triple sampling*.

Respect the MCP2515 constraints:

$$\begin{aligned}
 &1 \leq \text{inBitRatePrescaler} \leq 64 \\
 &1 \leq \text{inSJW} \leq 4 \\
 &1 \leq \text{inPropagationSegment} \leq 8 \\
 &\text{Single sampling: } 1 \leq \text{inPhaseSegment1} \leq 8 \\
 &\text{Triple sampling: } 2 \leq \text{inPhaseSegment1} \leq 8 \\
 &\quad 2 \leq \text{inPhaseSegment2} \leq 8 \\
 &\quad \text{inSJW} < \text{inPhaseSegment2} \\
 &\quad \text{inPhaseSegment2} \leq \text{inPropagationSegment} + \text{inPhaseSegment1}
 \end{aligned}$$

Call the CANBitSettingConsistency method ([section 16.3 page 36](#)) for checking your bit setting is consistent. Note the ACAN2515::begin method does this.

You can use this constructor for several reasons:

- you need a specific bit setting that the algorithm of the previous constructor cannot provide;
- you want to save program memory.

The algorithm of the previous constructor requires 32-bit arithmetic, that is expensive for a 8-bit processor as the Arduino Uno's one. The [table 3](#) lists the program sizes of the LoopBackDemo and LoopBackDemoBitRateSettings sketches, for several platforms. The Teensy 3.5 settings are: USB Serial, 120 MHz, Smallest code with LTO.

Platform	Sketch LoopBackDemo	Sketch LoopBackDemoBitRateSettings
Arduino Uno	7 600 bytes	6 410 bytes
Adafruit Feather M0	15 976 bytes	15 656 bytes
Teensy 3.5	14 004 bytes	13 524 bytes

Table 3 – Sketch program sizes

A starting point for obtaining the bit setting parameters is to execute the first constructor and note the values it provides. For example, run the LoopBackDemo sketch, it displays in the serial monitor the bit setting values that you can then use in the LoopBackDemoBitRateSettings sketch.

You can also write a program for your desktop computer: the ACAN2515Settings class is not Arduino specific.

16.3 The CANBitSettingConsistency method

This method checks the CAN bit decomposition (given by mBitRatePrescaler, mPropagationSegment, mPhaseSegment1, mPhaseSegment2, mSJW property values) is consistent.

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 500 * 1000) ; // 500 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    settings.mPhaseSegment1 = 0 ; // Error, mPhaseSegment1 should be >= 1 (and <= 8)
    Serial.print ("Consistency: 0x") ;
    Serial.println (settings.CANBitSettingConsistency (), HEX) ; // 0x10, meaning error
    ...
}
```

The CANBitSettingConsistency method returns 0 if CAN bit decomposition is consistent. Otherwise, the returned value is a bit field that can report several errors – see [table 4](#).

The ACAN2515Settings class defines static constant properties that can be used as mask error. For example:

```
public: static const uint32_t kBitRatePrescalerIsZero = 1 << 0 ;
```

Bit	Error Name	Error
0	kBitRatePrescalerIsZero	mBitRatePrescaler == 0
1	kBitRatePrescalerIsGreaterThan64	mBitRatePrescaler > 64
2	kPropagationSegmentIsZero	mPropagationSegment == 0
3	kPropagationSegmentIsGreaterThan8	mPropagationSegment > 8
4	kPhaseSegment1IsZero	mPhaseSegment1 == 0
5	kPhaseSegment1IsGreaterThan8	mPhaseSegment1 > 8
6	kPhaseSegment2IsLowerThan2	mPhaseSegment2 < 2
7	kPhaseSegment2IsGreaterThan8	mPhaseSegment2 > 8
8	kPhaseSegment1Is1AndTripleSampling	(mPhaseSegment1 == 1) && mTripleSampling
9	kSJWIsZero	mSJW == 0
10	kSJWIsGreaterThan4	mSJW > 4
11	kSJWIsGreaterThanOrEqualToPhaseSegment2	mSJW >= mPhaseSegment2
12	kPhaseSegment2IsGreaterThanPSPlusPS1	mPhaseSegment2 > (mPropagationSegment + mPhaseSegment1)

Table 4 – The ACAN2515Settings::CANBitSettingConsistency method error codes

16.4 The actualBitRate method

The actualBitRate method returns the actual bit computed from mBitRatePrescaler, mPropagationSegment, mPhaseSegment1, mPhaseSegment2, mSJW property values.

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 440 * 1000) ; // 440 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (--> is false)
    Serial.print ("actual bit rate: ") ;
    Serial.println (settings.actualBitRate ()) ; // 444,444 bit/s
    ...
}
```

Note. If CAN bit settings are not consistent (see [section 16.3 page 36](#)), the returned value is irrelevant.

16.5 The exactBitRate method

The exactBitRate method returns true if the actual bit rate is equal to the desired bit rate, and false otherwise.

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 727 * 1000) ; // 727 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    Serial.print ("actual bit rate: ") ;
    Serial.println (settings.actualBitRate ()) ; // 727272 bit/s
    Serial.print ("distance: ") ;
    Serial.println (settings.ppmFromDesiredBitRate ()) ; // 375 ppm
    Serial.print ("Exact: ") ;
    Serial.println (settings.exactBitRate ()) ; // 0 (----> false)
    ...
}
```

Note. If CAN bit settings are not consistent (see [section 16.3 page 36](#)), the returned value is irrelevant.

For a 16 MHz clock, the 28 exact bit rates are: 5 kbit/s, 6250 bit/s, 6400 bit/s, 8 kbit/s, 10 kbit/s, 12500 bit/s, 12800 bit/s, 15625 bit/s, 16 kbit/s, 20 kbit/s, 25 kbit/s, 31250 bit/s, 32 kbit/s, 40 kbit/s, 50 kbit/s, 62500 bit/s, 64 kbit/s, 80 kbit/s, 100 kbit/s, 125 kbit/s, 160 kbit/s, 200 kbit/s, 250 kbit/s, 320 kbit/s, 400 kbit/s, 500 kbit/s, 800 kbit/s, 1000 kbit/s.

For a 10 MHz clock, the 24 exact bit rates are: 3125 bit/s, 4 kbit/s, 5 kbit/s, 6250 bit/s, 8 kbit/s, 10 kbit/s, 12500 bit/s, 15625 bit/s, 20 kbit/s, 25 kbit/s, 31250 bit/s, 40 kbit/s, 50 kbit/s, 62500 bit/s, 78125 bit/s, 100 kbit/s, 125 kbit/s, 156250 bit/s, 200 kbit/s, 250 kbit/s, 312500 bit/s, 500 kbit/s, 625 kbit/s, 1000 kbit/s.

For a 8 MHz clock, the 28 exact bit rates are: 2500 bit/s, 3125 bit/s, 3200 bit/s, 4 kbit/s, 5 kbit/s, 6250 bit/s, 6400 bit/s, 8 kbit/s, 10 kbit/s, 12500 bit/s, 15625 bit/s, 16 kbit/s, 20 kbit/s, 25 kbit/s, 31250 bit/s, 32 kbit/s, 40 kbit/s, 50 kbit/s, 62500 bit/s, 80 kbit/s, 100 kbit/s, 125 kbit/s, 160 kbit/s, 200 kbit/s, 250 kbit/s, 400 kbit/s, 500 kbit/s, 800 kbit/s.

Note an 1 Mbit/s bit rate cannot be performed with a 8 MHz clock.

16.6 The ppmFromDesiredBitRate method

The ppmFromDesiredBitRate method returns the distance from the actual bit rate to the desired bit rate, expressed in part-per-million (ppm): 1 ppm = 10^{-6} . In other words, 10,000 ppm = 1%.

```
const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 727 * 1000) ; // 727 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ") ;
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
```

```

Serial.print ("actual bit rate: ");
Serial.println (settings.actualBitRate ()) ; // 727272 bit/s
Serial.print ("distance: ");
Serial.println (settings.ppmFromDesiredBitRate ()) ; // 375 ppm
...
}

```

Note. If CAN bit settings are not consistent (see [section 16.3 page 36](#)), the returned value is irrelevant.

16.7 The samplePointFromBitStart method

The samplePointFromBitStart method returns the distance of sample point from the start of the CAN bit, expressed in part-per-cent (ppc): 1 ppc = 1% = 10^{-2} . If triple sampling is selected, the returned value is the distance of the first sample point from the start of the CAN bit. It is a good practice to get sample point from 65% to 80%.

```

const uint32_t QUARTZ_FREQUENCY = 16 * 1000 * 1000 ; // 16 MHz
void setup () {
    ...
    ACAN2515Settings settings (QUARTZ_FREQUENCY, 500 * 1000) ; // 500 kbit/s
    Serial.print ("mBitRateClosedToDesiredRate: ");
    Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (--> is true)
    Serial.print ("Sample point: ");
    Serial.println (settings.samplePointFromBitStart ()) ; // 68 --> 68%
    ...
}

```

Note. If CAN bit settings are not consistent (see [section 16.3 page 36](#)), the returned value is irrelevant.

16.8 Properties of the ACAN2515Settings class

All properties of the ACAN2515Settings class are declared public and are initialized ([table 5](#)). The default values of properties from mDesiredBitRate until mTripleSampling corresponds to a CAN bit rate of QUARTZ_FREQUENCY / 64, that is 250,000 bit/s for a 16 MHz quartz.

16.8.1 The mOneShotModeEnabled property

This boolean property corresponds to the OSM bit of the CANCTRL control register. It is false by default.

16.8.2 The mTXBPriority property

This property defines the transmit priority associated the TXB_i registers:

- bits 1-0: priority of TXB0;
- bits 3-2: priority of TXB1;
- bits 5-4: priority of TXB2;

Property	Type	Initial value	Comment
mQuartzFrequency	uint32_t	QUARTZ_FREQUENCY	
mDesiredBitRate	uint32_t	QUARTZ_FREQUENCY / 64	
mBitRatePrescaler	uint8_t	2	See section 16.1 page 31
mPropagationSegment	uint8_t	5	See section 16.1 page 31
mPhaseSegment1	uint8_t	5	See section 16.1 page 31
mPhaseSegment2	uint8_t	5	See section 16.1 page 31
mSJW	uint8_t	4	See section 16.1 page 31
mTripleSampling	bool	false	See section 16.1 page 31
mBitRateClosedToDesiredRate	bool	true	See section 16.1 page 31
mOneShotModeEnabled	bool	false	See section 16.8.1 page 38
mTXBPriority	uint8_t	0	See section 16.8.2 page 38
mRequestedMode	RequestedMode	NormalMode	See section 16.8.3 page 39
mCLKOUT_SOF_pin	CLKOUT_SOF	CLOCK	See section 16.8.4 page 39
mRolloverEnable	bool	true	See section 16.8.5 page 39
mReceiveBufferSize	uint16_t	32	See section 8.1 page 17
mTransmitBuffer0Size	uint16_t	16	See section 7.2 page 16
mTransmitBuffer1Size	uint16_t	0	See section 7.2 page 16
mTransmitBuffer2Size	uint16_t	0	See section 7.2 page 16

Table 5 – Properties of the ACAN2515Settings class

- bits 7-6: *unused*.

By default, its value is 0, all three TXB_i registers get the same 0 priority.

16.8.3 The mRequestedMode property

This property defines the mode requested at this end of the configuration: NormalMode (default value), ListenOnlyMode, LoopBackMode, SleepMode.

Note. SleepMode has been added in release 2.0.0.

16.8.4 The mCLKOUT property

This property defines signal output on the CLKOUT/SOF pin; possible values are: CLOCK (default value), CLOCK2, CLOCK4, CLOCK8, SOF, HiZ.

16.8.5 The mRolloverEnable property

This boolean property corresponds to the BUKT bit of the RXB0CTRL control register. If true (value by default), RXB0 message will roll over and be written to RXB1 if RXB0 is full; if false, rollover is disabled.

17 CAN controller state

Two methods return the receive error counter and the transmit error counter.

17.1 The receiveErrorCounter method

```
public: uint8_t receiveErrorCounter (void) ;
```

17.2 The transmitErrorCounter method

```
public: uint8_t transmitErrorCounter (void) ;
```