




# Rettungszeichen **KAPPA**

46UT009 für Zentral-/Gruppenbatterie



## TECHNICAL DRAWING

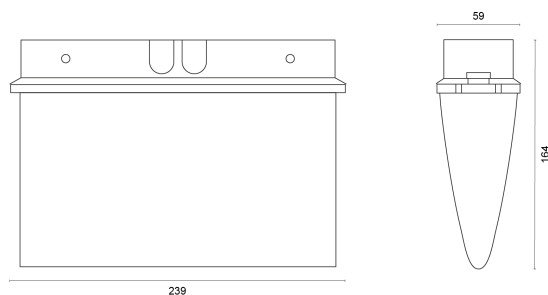

## LIGHT INFORMATION

### PROPERTIES

through-wiring	No
connection	Terminal: 2-pole max. 2,5 mm <sup>2</sup>
module per circuit breaker B10A	—
module per circuit breaker B16A	—
module per circuit breaker C10A	—
module per circuit breaker C16A	—
switching cycles	> 500.000
voltage range AC	230 V AC, 50/60 Hz
voltage range DC	176 – 275 V DC

### ORDER OVERVIEW

Escape sign luminaire KAPPA 46UT009 for central battery	
product code	K46UT009
EAN code	4260374015437
warranty	5 years

### ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	130 lm/W
system performance	4,5 VA
luminous flux	.130 lm
dimnable	No

### RESILIENCE

protection class	II
impact resistance	IK04
protection type	IP54
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	–10 to +40 °C
foodready	Yes

### MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	PC
housing color	White

### SCOPE OF DELIVERY

includes mounting material and 3-pcs. pictogramset
--

### DIMENSION

L x W x H / Ø (H2)	239 x 164 x 59 mm
weight	0,6 kg