

# Review of constraints on vision-based gesture recognition for human–computer interaction

ISSN 1751-9632

Received on 2nd February 2017

Revised 19th September 2017

Accepted on 14th November 2017

E-First on 18th December 2017

doi: 10.1049/iet-cvi.2017.0052

www.ietdl.org

Biplab Ketan Chakraborty<sup>1</sup>, Debajit Sarma<sup>1</sup>, M.K. Bhuyan<sup>1</sup> ✉, Karl F MacDorman<sup>2</sup>

<sup>1</sup>Department of Electronics and Electrical Engineering, IIT Guwahati 781039, India

<sup>2</sup>Indiana University School of Informatics and Computing, 535 West Michigan St., Indianapolis, IN 46202, USA

✉ E-mail: mkb@iitg.ernet.in

**Abstract:** The ability of computers to recognise hand gestures visually is essential for progress in human–computer interaction. Gesture recognition has applications ranging from sign language to medical assistance to virtual reality. However, gesture recognition is extremely challenging not only because of its diverse contexts, multiple interpretations, and spatio-temporal variations but also because of the complex non-rigid properties of the hand. This study surveys major constraints on vision-based gesture recognition occurring in detection and pre-processing, representation and feature extraction, and recognition. Current challenges are explored in detail.

## 1 Introduction

The use of computers and related devices has become ubiquitous. Hence, the need has increased for interfaces that support effective human–computer interaction (HCI). HCI concerns ‘the design, evaluation, and implementation of interactive computing systems for human use and with the study of major phenomena surrounding them’ [1, 2], especially ‘in the context of the user’s task and work’ [3]. In striving toward these ends, HCI research builds on progress in several related fields, as shown in Fig. 1. It is focused not only on enhancing the usability, reliability, and functionality of present-day interfaces but also on the development of novel, innovative interfaces that can be used in natural, lifelike ways. Such interfaces are in demand for interacting with virtual environments in computer games and virtual reality, for teleoperation in robotic surgery and so on. Active interfaces, intelligent adaptive interfaces, and multimodal interfaces are all gaining prominence.

Gesture recognition is an important area for development in HCI systems. These systems can be broadly classified based on their number of channels as *unimodal* or *multimodal* [4]. Unimodal systems can be (a) *vision-based* (e.g. body movement tracking [5], facial expression recognition [6, 7], gaze detection [8], and gesture recognition [9]), (b) *audio-based* (e.g. auditory emotion recognition [10], speaker recognition [11], and speech recognition

[12]), or (c) based on other types of sensors [13]. The most researched unimodal HCI systems are vision based. People typically use multiple modalities during human–human communication. Therefore, to assess a user’s intention or behaviour comprehensively, HCI systems should integrate information from multiple modalities as well [14]. Multimodal interfaces can be setup using combinations of inputs, such as gesture and speech [15] or facial pose and speech [16]. Most of the recent and important applications of vision-based gesture recognition (VGR) include sign-language recognition [17], virtual reality [18], virtual game [19], augmented reality [20], smart video conferencing [21], smart home and office [22], healthcare and medical assistance (MRI navigation) [23], robotic surgery [24], wheelchair control [25], driver monitoring [26], vehicle control [27], interactive presentation module [28], and virtual classroom [29], e-commerce [30] and so on.

In recent years, VGR has become a key research topic in HCI and there are many real-life applications of VGR. One of the breakthroughs in VGR is the introduction of Microsoft Kinect as a contact-less interface [31]. The Kinect has significant potential in various applications, such as healthcare [23], education [32] and so on. However, its poor outdoor performance and depth resolution limit its usability. Recently, SoftKinetic’s Gesture Control Technology is incorporated in BMW cars to allow drivers to navigate the in-vehicle infotainment system with ease [33]. However, the VGR module is still in its primitive stage due to its limited functionality and gesture vocabulary. Although VGR has been surveyed in several review papers (Table 1), none specifically addresses problems arising from constraints on existing VGR methods. The nature and extent of these constraints depends on the

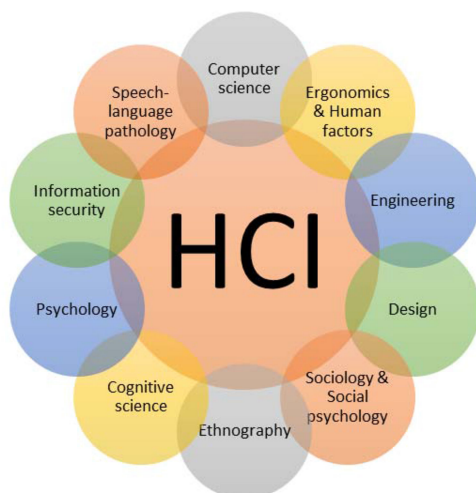


Fig. 1 Human–computer interaction and related research fields

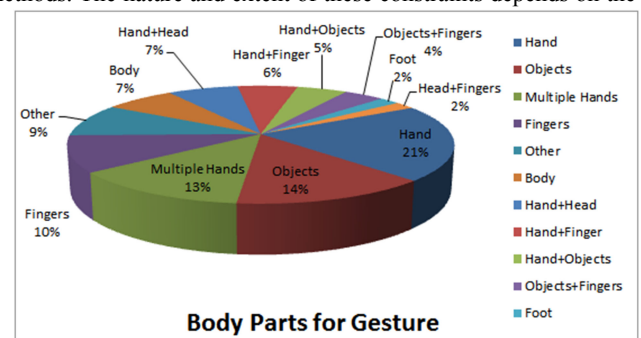


Fig. 2 Use of the different body parts or objects for gesturing [45]

application. Major difficulties associated with image processing techniques during gesture recognition for the above mentioned VGR applications are as follows:

- A gesture recognition system generally uses a single colour video camera to minimise the necessary hardware components and calibrations. Using a single colour video camera and consequently the projection of the three-dimensional (3D) scene on a 2D plane results in the loss of depth information. Therefore, reconstruction of the 3D trajectory of the hand in space is not possible.
- Illumination change in the testing environment seriously hampers hand image segmentation.
- For reliable recognition, hand image segmentation via background motion compensation and accurate motion estimation of the hand is an essential requirement. Unfortunately, like other image processing problems, hand tracking and segmentation in a cluttered background is a critical problem in hand gesture recognition. In most occasions, the background is not simple. Also, the background may contain other body parts captured by the camera. Moreover, the occlusion due to other body parts or self-occlusion may cause problems during segmentation.
- The processing of a large amount of image data is time consuming and thus, real-time recognition may be difficult.

However, some of the applications mentioned above require more attention towards some constraints than others, as highlighted below:

- VGR systems in 3D modelling-based applications such as virtual and augmented reality require accurate depth estimation with high depth resolution.
- VGR systems for indoor applications such as sign-language recognition and virtual reality require uniform ambient illumination. However, VGR systems for outdoor applications such as driver monitoring, vehicular control and so on should work in an environment with a broad range of dynamically changing illuminations and cluttered backgrounds.
- Applications requiring real-time multiple user interaction such as smart video conferencing, smart home and office, virtual classrooms, e-commerce and so on requiring a properly synchronised hardware setup for real-time applications.
- Higher recognition accuracy is a primary criterion for VGR applications like healthcare and medicine. In addition, portability is important for some VGR applications, such as vehicles and other mobile platforms.

Section 2 presents an overview of a basic VGR system. Section 3 examines main constraints on gesture recognition systems for vision-based HCI modules.

## 2 Overview of vision-based gesture recognition

Gesture recognition is an important area of research in computer vision. In the framework of human-computer non-verbal communication, the visual interface establishes communication channels for inferring intentions from human behaviour, including facial expressions and hand gestures. Hand gesture recognition from visual images forms a key part of this interface. It has potential applications in machine vision, virtual reality, robotic control and so on.

### 2.1 Gesture recognition system architecture

A gesture is a pose or physical movement of the hands, arms, face, or body that is meaningful and informative. According to Karam [45], the hand is the most widely used body part (Fig. 2). The primary task of vision-based interfaces (VBIs) is to detect and recognise visual information for communication. A vision-based approach is more natural and convenient than, e.g. a glove-based approach. It is easy to deploy and can be used anywhere within a camera's field of view (FoV). However, it is more difficult because

of current limitations in computer vision in processing human hands, which are non-convex and flexible. The straightforward approach to vision-based gesture recognition is to acquire visual information about a person in a certain environment and try to extract the necessary gestures. This approach must be performed in a sequence, namely, detection and pre-processing, gesture representation and feature extraction, and recognition

- Detection and pre-processing:* The detection of gesturing body parts is crucial because the accuracy of the VGR system depends on it. Detection includes capturing the gestures using imaging devices. Pre-processing segments the gesturing body parts from images or videos as accurately as possible given such constraints as illumination variation, background complexity, and occlusion.
- Gesture representation and feature extraction:* The next stage in a hand gesture recognition task is to choose a mathematical description or model of the gesture. The scope of a gestural interface is directly related to the proper modelling of hand gestures. Modelling depends on the intended application. For some applications, a coarse, simple model may be sufficient. However, if the purpose is natural interaction, a model should allow many, if not all, natural gestures to be interpreted by the computer. Many authors have identified different features for representing particular kinds of gestures [46]. Most of the features can be broadly classified as follows: (a) shape, (e.g. geometric features or non-geometric features [34]), (b) texture or pixel value, (c) 3D model-based features [44], and (d) spatial features (e.g. position and motion [47–49]).
- Recognition:* The final stage of a gesture recognition system is a classification. A suitable classifier recognises the incoming gesture parameters or features and groups them into either predefined classes (supervised) or by their similarity (unsupervised) [9]. There are many classifiers used for both static and dynamic gesture (DG) recognition, each with its own limitations.

## 3 VGR systems and their associated constraints

The ability of computers to recognise hand gestures visually is essential for the future development of HCI. However, vision-based recognition of hand gestures, especially dynamic hand gestures, poses an onerous difficult interdisciplinary challenge for three reasons:

- hand gestures are diverse, have multiple meanings, and vary spatio-temporally;
- the human hand is a complex non-rigid object making it difficult to recognise; and
- computer vision itself is an ill-posed problem.

A gesture recognition system relies on a series of subsystems, as explained in the last section. Because the subsystems are connected in series, the overall accuracy of the system is the product of the accuracy of each subsystem. Thus, overall performance cannot exceed that of the subsystem that is the 'weakest link'. This section presents an analysis of the difficulties associated with hand gesture recognition at each stage (Fig. 3).

### 3.1 Detection and pre-processing

Gesture detection involves capturing images or videos using imaging devices and then, in a pre-processing stage, localising in them the gesturing body parts.

**3.1.1 Gesture acquisition:** The acquisition subsystem contains either a 2D camera (b/w or colour) or a 3D imaging system (e.g. a stereo camera pair or a camera with depth sensors). A camera consists of several subsystems. Berman and Stern [50] reviewed the effects of camera parameters on VGR system characteristics. VGR accuracy depends on the following camera specifications:


**Table 1** Some comprehensive surveys on gesture recognition and gesture-based interfaces

Ref.	Scope of analysis	Contributions
Pavlovic <i>et al.</i> [34]	A survey of hand gesture modelling, analysis, and recognition.	3D hand models better describe and discriminate gestures but with higher computational complexity. Appearance-based models are limited in gesture description despite being simpler to implement.
Wu and Huang [35]	A survey of vision-based static hand posture and temporal gesture recognition approaches and their applications.	An investigation of feature selection, data collection for visual gesture learning, various algorithms for static and DG recognition, use of HMMs, and their variants in sign language recognition.
Moeslund and Granum [36]	A survey of vision-based human motion capturing methods focusing on initialisation, tracking, pose estimation, and recognition.	Investigation of different problems such as the lack of an alphabet vocabulary of motion data for training, the large amount of time required to capture and label human motion data, use of 2D silhouettes to estimate a 3D pose, the problem of incremental updates, motion ambiguity due to movement projection on planes.
Derpanis [37]	A review of vision-based hand gestures on different aspects like the feature set, classification methods, and gesture representation.	Analysis of gesture-based HCI under ambient lighting conditions and high contrast stationary backgrounds.
Moeslund <i>et al.</i> [5]	A review of advances in video-based human capture and analysis and open problems in the automatic visual analysis of human movement.	Investigated automatic initialisation of model shape, appearance, and pose; reliable detection and tracking of multiple people in unstructured outdoor scenes with partial occlusion; human motion reconstruction from multiple views and from monocular videos.
Erol <i>et al.</i> [38]	A review of hand pose estimation method and capturing of the real 3D hand motion in HCI.	Comparison of methods on the effective number of DoF, number and types of cameras, system's operation in a cluttered background, use of hand model constraints, algorithmic details, execution speed, and observable pose restrictions. Discussion of problems due to lack of ground-truth data, high-dimensionality, self-occlusions, uncontrolled environments, and rapid hand motion.
Mitra and Acharya [9]	A survey of hand gesture and facial expression recognition methods with a discussion on different tools for gesture recognition.	Discussion on HMMs, particle filtering, and condensation algorithm, FSMs, ANNs, Gabor filtering and optical flow; hybridisation of HMMs and FSMs; different facial expression modelling approaches; use of soft computing tools.
Moni and Ali [39]	A literature review of different approaches to vision-based gesture recognition using HMMs.	Difficulty in achieving a continuous online recognition with minimal time delay because the starting and ending points of a gesture are not known. Problems due to assumptions about lighting, background, and signer's location are discussed.
Wachs <i>et al.</i> [40]	A description of the requirements of hand-gesture based interfaces for various application types and associated challenges.	Discussions on gesture recognition methods that depend on the application, domain, environment, and the user's cultural background.
Suarez and Murphy [41]	A review of depth image-based hand tracking and gesture recognition systems.	Investigation on the use of Kinect for hand segmentation using depth thresholding; hand tracking using Kalman filters and mean shift clustering or using the NITE body-tracking and hand-tracking module from OpenNI.
Rautaray and Agrawal [42]	A comparative survey of hand gesture interfaces, focusing on gesture recognition systems based on detection, tracking, and recognition, and their applications.	Comparative analysis of gesture taxonomies, gesture representation and recognition techniques, different software platforms. Also, a survey on application domain of gesture recognition is provided.
Hasan and Abdul-Kareem [43]	A survey of gesture-based HCI focusing on different application domains for efficient interaction.	The analysis focused on different applications of gesture recognition techniques. The investigation also found appearance-based gesture representations are preferable than 3D-based gesture representations due to the complexity of implementation of the latter.
Cheng <i>et al.</i> [44]	A survey of various 3D hand gesture modelling and recognition techniques.	Investigation of different 3D hand gesture modelling and recognition techniques, e.g. static hand gesture, trajectory-based hand gesture, and continuous hand gesture. Also, discuss different 3D depth sensors along with some popular dataset.

- i. *Colour range*: For image acquisition, sensors for the visible light range (390–750 nm wavelength) are typically used. The main problem with visible light sensors is that their response depends on the amount and chromatic nature of an illuminant. Near-infrared (near-IR) radiation offers an alternative to visible light [51] that is less sensitive to illumination changes. Human gestures can be captured using near-IR cameras with subjects wearing near-IR reflectors. However, the reflectors may impair the user's natural feeling of gesturing. By contrast, thermal or infrared (IR) cameras depend solely on the heat signature generated by the human body. Thus, IR cameras are superior to visible light cameras under poor or varying illumination conditions. However, visible cameras are usually preferred because of their low cost.
- ii. *Resolution and accuracy*: The picture quality of a camera depends on two factors: its resolution and its colour

reproduction accuracy. The resolution of a camera is represented by the number of pixels present in a column (e.g. 720 pixels, 1080 pixels), by both the column and row (e.g. 640 × 480 pixels), or by the total number of pixels (e.g. 0.3 megapixels). Accuracy describes how accurate the colour reproduction is. So, each pixel value is represented by several bits (e.g. 8 bits, 24 bits). Standard RGB cameras have 24-bit accuracy. According to Zhenyao and Neumann [52], use of low resolution cameras may affect the performance of a VGR system in the following ways:

- The segmentation of the hand may be noisy because of a complex background or varying illumination conditions.
- For applications like sign language recognition, a full upper-body image is required, and so hand regions occupy a tiny

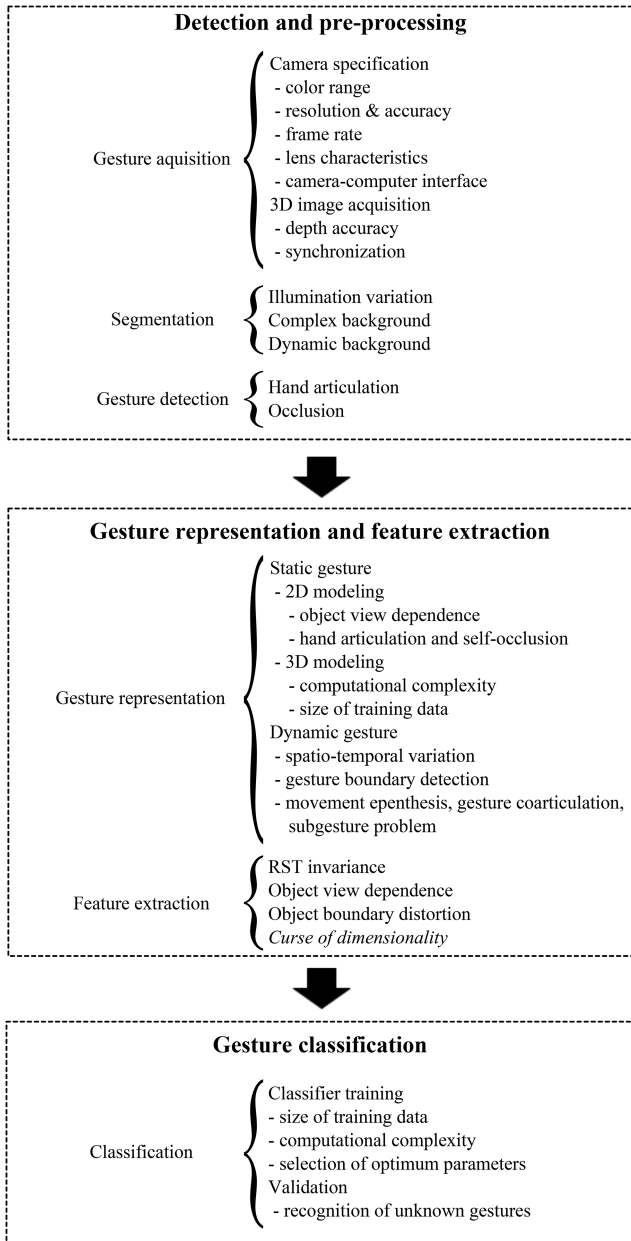

**Fig. 3** Different stages of a VGR system and their associated constraints

area in the image. Hence, it is difficult to extract texture and other geometrical features from the hand.

- A VGR system may fail to initialise or track gestures at a low resolution.

Use of high resolution cameras (HD cameras) can resolve the aforementioned constraints at the expense of processing time.

- Frame rate:** The number of images or *frames per second* (fps) a camera can capture. In a VGR system, the frame rate should be enough to capture body part movements accurately. The most appropriate frame rate depends on the hardware configuration of the image acquisition system and on the speed of gesturing hands or other body parts. For slowly moving hands, a low frame rate such as 15 fps may be satisfactory. However, applications such as sign language recognition or virtual reality involve fast moving hands or body parts. In these cases, a low frame rate camera may not be able to capture enough instances of moving hands for continuous motion. Some of the existing frame rate standards are 24 fps (standard film), 25 fps (PAL), 29.97 fps (NTSC), and 60 fps (ATSC video).
- Lens characteristics:** The quality and amount of distortion present in an image are influenced by camera lens characteristics. A lens is characterised by its focal length (in mm) and aperture ( $F$ -number). The focal length describes the

FoV of a camera. The aperture is the amount of opening, which determines the depth of field (DoF), i.e. the range of distances at which objects appear in focus. The DoF reduces with an increasing aperture for a lens with a fixed focal length. It results in the blurring of distant objects with an increasing  $F$ -number. Most of the image acquisition systems use cameras having fixed lenses and aperture. Ideally, the performance of a VGR system should not be affected by illumination variations and it should have a large DoF. A camera having a narrow aperture gives a large DoF, but less light enters the camera. This results in noisy and dark images under low light conditions. Therefore, hand detection and segmentation could be difficult. By contrast, cameras with a larger aperture provide a better quality image under low light conditions but with fewer DoF. Therefore, a trade-off exists between image brightness and DoF.

- Camera-computer interface:** The data transfer speed of the interface between a camera and a computer significantly affects the overall speed of a VGR system. For a video of resolution  $W \times H$  with frame rate  $f_r$ , the required bitrate for transmission in uncompressed form is given by

$$\text{bitrate} = 24 \times f_r \times W \times H$$

So, a  $640 \times 480$  (30 fps) video requires  $\sim 211$  Mb/s data transfer rate, whereas a high definition video (720p, 30 fps) requires a data transfer rate  $\sim 633$  Mb/s. Now, most of the low-end cameras use a USB 2.0 interface with a maximum speed limit of 480 Mb/s. However, the maximum achievable data transfer rate depends on the total number of USB peripherals connected to the system. This limits the data transfer rate to a lower value which restricts the resolution and frame rate of the video to be transmitted. Also, the computer's run time load and capabilities could degrade the resolution and frame rate supported by the camera. In recent years, some high-end cameras use a USB 3.0 interface (4.8 Gb/s) equipped with built in codecs. This reduces the bitrate burden to the interface by compressing the data before transmission.

Although most VGR systems use 2D cameras, the focus of recent research is shifting towards incorporating depth information. The use of 3D sensors in a VGR system improves its overall robustness and flexibility while increasing its cost and computational complexity. The 3D information can be used either to model a 3D gesture by directly using the 3D position vectors or as a frontal plane position (colour information) plus range (depth information). For the latter, range information is used mostly to segment the foreground (gesturing body parts) from the background. The colour information is used for 2D gesture recognition. The different methods of data acquisition in 3D VGR systems are as follows:

- Standard stereo cameras:** A pair of standard colour videos or still cameras capture two simultaneous images. The disparity is calculated as a depth measure from the two simultaneous images. Some of the gesture recognition methods using stereoscopic systems are given in [53, 54]. A major challenge in stereoscopic vision is the finding correspondence between a stereo image pair. Difficulties arise for many reasons:

(a) **Camera inconsistency:** The geometrical configuration (intrinsic parameters) of two cameras are not the same, and even the parameters of two cameras of same brand are not identical. So, there is inconsistency between the two captured images. The presence of noise in any one or both of the images changes the pixel intensity values, which leads to improper matching.

(b) **Unique correspondence:** It is very difficult to find correspondence in the textureless image regions. Ambiguity in matching also occurs when the image regions have a similar or repetitive pattern or structure in the horizontal direction.

(c) *Occlusion*: In sign language recognition or two handed gesture recognition, one hand can occlude the other hand or face. So, finding proper correspondence between two images is difficult in the presence of occlusion.

Apart from this, the accuracy of a disparity map may depend on other factors:

- The accuracy of disparity-based depth estimation is poor if the foreground and background are very close to each other. For example, a user could be found standing or sitting very near to a wall. In this case, the difference in disparity values of background and foreground regions could be small. This will result in a foreground-background ambiguity in the depth map.
  - The disparity calculation is computationally expensive.
  - The disparity calculation relies on adequate scene illumination and surface texturing. Also, the disparity map obtained from the stereo image pairs may not give information about the specular surface.
- ii. *Multiple camera-based system*: In contrast to the stereo camera-based acquisition system that gives only a relative depth measure between different objects and the camera, a multiple camera-based acquisition system can better capture the 3D structure of an object. In the last decade, several researchers [55, 56] used multiple camera-based systems for gesture recognition. Although most of the multiple camera-based VGR systems used visible light cameras, some of the researchers used IR cameras. For example, Ogawara *et al.* [57] fitted a 26-degree of freedom (DoF) kinematic model to a volumetric model of the hand constructed from images obtained using multiple infrared cameras arranged orthogonally. However, multiple camera-based gesture acquisition systems have the following limitations:
- (a) *Synchronisation*: The cameras should be synchronised to capture multi-view images of an object, which implies simultaneous capturing all multi-view images. However, all imaging devices have varying delays. Thus, a dedicated hardware setup is needed to synchronise all the cameras.
- (b) *Ruggedness*: The system becomes complex and rigid. It is hard to mount a multiple camera-based system on a portable platform such as a notebook computer or smart phone. System performance depends so heavily on the device's structural configuration that, for even a small change in the configuration, it requires recalibration.
- iii. *Time-of-flight (ToF) system*: This method obtains depth information by measuring the time delay between the transmissions and reception of a light pulse. Examples include

- (a) PMD Technologies' CamCube®: depth range up to 60 m.  
 (b) Mesa Imaging's SwissRanger SR4000®: depth range of 5–10 m with  $176 \times 144$  resolution.

Some recent gesture recognition methods using ToF are given in [58–60]. Though the inclusion of depth information can significantly improve the accuracy of gesture recognition, ToF systems face the following limitations:

- Time must be measured with a high accuracy. For example, an accuracy of  $\sim 1$  cm in depth measurement requires an accuracy of  $\sim 66.7$  picoseconds in time measurement. However, measurement of returned light pulse may be inexact due to light scattering near a VGR system. Thus, the accurate depth information cannot be determined.
- It is difficult to generate short light pulses with fast rise and fall times.
- For a VGR system, the depth resolution should be high. The depth resolution of a ToF camera is proportional to its signal-to-noise ratio (SNR). The SNR is inversely proportional to the number of electrons collected, which depends on the amount of reflected light [61]. A light source having a low pulse repetition rate (e.g. lasers) produces low SNR, thus yielding low depth resolution.

- Background light and multiple reflections create interference and cause ambiguity in time measurement, which results in inaccurate depth measurement.
- According to Basler's ToF sensor manual [62], the following constraints should be imposed on hardware installation to avoid background light/scatterings:
  - the camera should not be exposed to bright sunlight (ambient illumination  $< 15$  klx),
  - the presence of mirrors or any other reflective surfaces/objects should be avoided in the vicinity of the sensor to reduce scattering.

iv. *Light coding technology*: This method uses an infrared projector to project a known pattern on the object and a CMOS sensor to capture deformations in the reflected pattern. Depth information is then calculated from the amount of deformation. Examples include

- (a) PrimeSense®: single-chip based, and depth image resolutions up to  $640 \times 480$  pixels (minimum distance  $\sim 0.8$  m).  
 (b) Microsoft Kinect®: depth range up to 5 m (minimum distance  $\sim 1.8$  m).


Some recent gesture recognition methods using Microsoft Kinect are given in [63, 64]. The major limitations of light coding systems are

- Poor performance in outdoor environments.
  - The error in depth measurements increases quadratically with distance from the sensor (about 4 cm at the distance of 5 m).
  - Depth resolution decreases quadratically with the distance from the sensor.
- v. *Leap motion sensors*: The objective is to determine 3D fingertip positions instead of whole body depth information as with the Kinect sensor. The sensor can obtain these positions with high accuracy ( $\sim 0.01$  mm) [44]. Leap motion sensors can be used in various applications, e.g. virtual environments [65] and gesture [66] and sign language recognition [67]. The major limitations of leap motion sensors are
- The sensors use specialised hardware and software and, thus, may be less compatible with other systems.
  - The sensor detects only fingertips lying parallel to the sensor plane. So, it may fail to detect multiple fingertips when fingers overlap (e.g. sign language). This restricts its applicability in the recognition of complex gestures.
  - The system may lack accuracy in normal lighting conditions or fail to track hands or fingers during an activity.

**3.1.2 Segmentation**: Accurate segmentation of hand or body parts from the captured images remains a challenge in computer vision for many reasons. Some of the limitations in segmentation are as follows:

- i. *Illumination variation*: Illumination variation affects the accuracy of skin colour segmentation methods. Poor illumination may change the chrominance properties of the skin colours, and the skin colour will be different from the image colour as shown in Fig. 4. Several researchers [68–70] converted from RGB to another colour space, dropped the luminance component, and used only the chrominance components to compensate for brightness variations in the image. However, because the skin reflectance locus and the illuminant locus are directly related [71], the perceived colour depends on scene illumination. Biplab *et al.* used a fusion-based image specific model for skin segmentation under varying illumination conditions [72, 73].
- ii. *Complex background*: A major challenge in gesture recognition is the proper segmentation of skin coloured objects (e.g. hands, face) against a complex static background. The accuracy of skin segmentation algorithms is limited because of objects in the background that are similar in colour to human



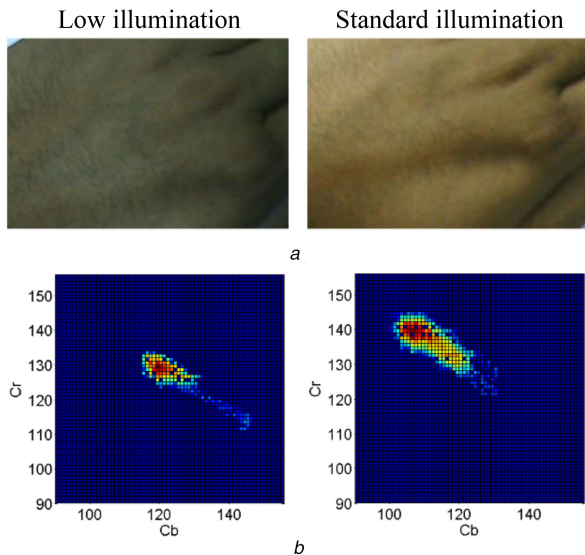

**Fig. 4** Effect of illumination variations on perceived skin colour  
(a) Skin colour under low and standard illumination conditions, (b) 2D colour histogram in YCbCr space


skin (Fig. 5). Skin colours in the background increase false positives. This problem can be addressed by different approaches such as using additional features, e.g. texture features [74, 75]. This assumes that a sharp textural discrimination exists between skin and non-skin regions. That assumption, however, may be violated due to the low resolution of images and/or a smooth background.

**3.1.3 Hand articulation and occlusion:** The hand is an articulated object with more than 20 DoF [76]. Many hand parameters need to be estimated for different hand poses, locations, and orientations. Their estimation is complicated because of the hand's high DoF. For monocular vision, the occlusion of joints and finger segments can prevent the detection of a hand configuration. Applications in vision-based interfacing (VBI) need to work around these limitations by using gestures that do not require full hand pose information. So far, articulated hand pose estimation in unconstrained settings is a largely unsolved problem.


Mitigating the effects of occlusion is a major challenge for gesture recognition. Not only may the hand occlude itself, but one hand may occlude the other during two-handed gestures. Both kinds of occlusions affect the appearance of the hand, thus hindering gesture recognition. In monocular vision-based gesture recognition, the appearance of gesturing hands is viewpoint dependent. As shown in Fig. 6, different hand poses appear similar from a particular viewpoint because of self-occlusions.

### 3.2 Gesture representation and feature extraction

To recognise a gesture, it must be represented using a suitable model. According to its spatio-temporal properties, gestures are broadly classified as *static* or *dynamic*. *Static* gestures (SGs) are defined by the pose or orientation of a body part in the space (e.g. hand pose), whereas *DGs* are defined by the temporal deformation of body parts (e.g. shape, position, motion). After a gesture modelling, an important step in gesture recognition is the

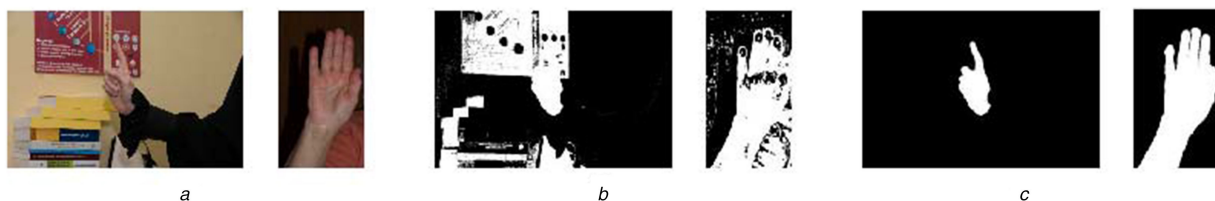

**Fig. 5** Effect of complex background on skin colour segmentation  
(a) Original images, (b) Segmentation results, and (c) Ground truth

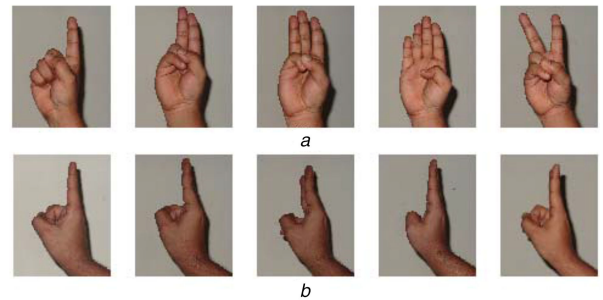


**Fig. 6** Different hand poses and their side views

extraction and selection of suitable features to represent associated gestures. A discussion follows on different gesture representation techniques and feature descriptors, and their constraints.

**3.2.1 Gesture representation:** SGs can be represented using a 2D model or a 3D model as shown in Fig. 7. The simplest way to represent a SG or pose is to use an appearance-based model, which tries to identify gestures directly from visual images. The model parameters are not derived from a 3D spatial description but instead by relating the appearance of the gesture to that of a set of predefined template gestures. The parameters of such models may be either the images themselves or some features derived from the images. Appearance-based models directly link the appearance of the hand and arm movements in visual images to specific gestures. The application of 2D modelling of static hand gestures is limited because it is object view dependent. 2D models are not sufficient to represent complex static hand gestures (e.g. sign language) because of the hand's articulation. Recent work focuses on the 3D representation of articulated hand gestures and their recognition. 3D static hand gesture recognition methods can be broadly classified into two model-based approaches: discriminative and generative. Discriminative approaches do not explicitly generate a 3D model of hands or other body parts. Instead, the classifiers are trained with appearance-based hand features to map unknown hand shape parameters with appearance-based features. This requires a large set of training data for offline training. In recent years, several researchers used 3D discriminative models for static hand gesture recognition. Shotton *et al.* [77] used skeletal modelling of body parts using depth data derived from a Kinect sensor. Keskin *et al.* [78] used a 3D mesh model to generate synthetic hand pose images to train randomised decision trees. However, depth features are sensitive to background changes. To mitigate this problem, Yao and Fu [79] fused different features (e.g. shape, surface, and position features) to use in a random forest (RF) classifier. The main limitations of discriminative models are

- the need for a large amount of data to train the classifiers, and
- a lack of robustness to real-life problems like hand articulation and self-occlusions due to the absence of kinematic constraints on hand modelling.

In contrast to discriminative modelling, generative modelling tries to fit 3D models explicitly to the data obtained from 2D or 3D images. The 3D hand appearance can be approximated using geometric structures like cylinders, spheres, ellipsoids, and hyper-rectangles [34]. 3D hand modelling can be performed using a kinematic model with 28 DoF [80] derived from 2D silhouette images. Unfortunately, silhouette images are not sufficient to

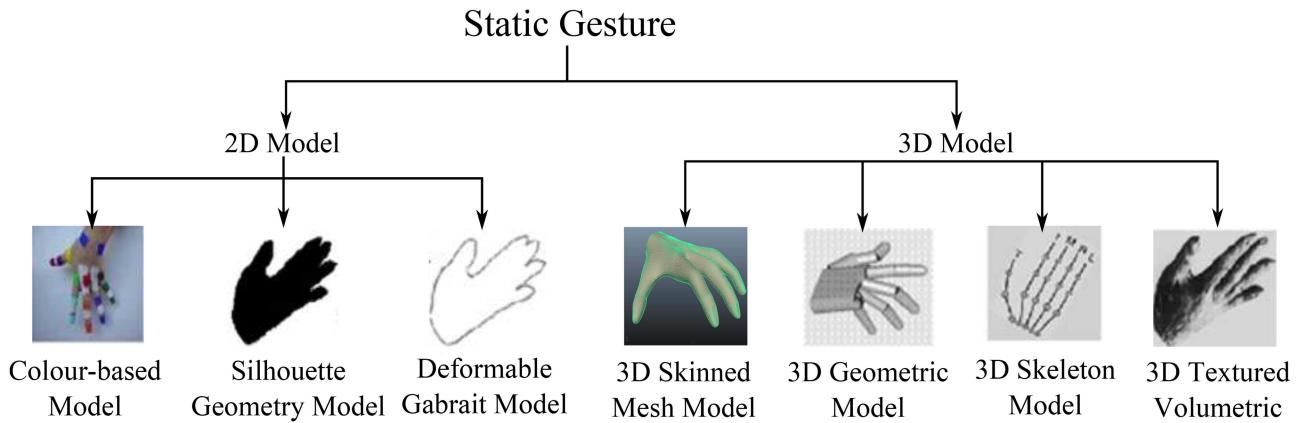

**Fig. 7** Different hand models for static VGR system

model real-life challenges like self-occlusion or varying illumination. de La Gorce *et al.* [81] showed that the use of texture mapping and a shading model can mitigate these problems. Researchers like Oikonomidis *et al.* used multiple camera-based images [82] or RGB-D images from a Kinect sensor [83] to match the 26-DoF hand model. In these methods, the 3D hand surface is represented with basic 3D shapes like a sphere and multiple truncated cylinders. The main limitations of generative models are their

- computational intensiveness, and
- lack of portability owing to the need for special hardware, like a multiple camera system.

As compared to SG recognition, which only uses features like colour, texture, and shape, DG recognition uses motion and/or deformation information like position, skewness, and velocity. DGs can be classified as isolated gestures or continuous gestures:

- Isolated gesture:** These gestures are temporally discrete. Their representation can be subdivided into two categories of feature descriptors: appearance-based and tracking-based. Gesture representation with appearance-based features mostly relies on the local feature descriptor. Dynamic features include the velocity and acceleration of a hand. The features can be obtained either from 2D or 3D image sequences (e.g. RGB-D). Bhuyan *et al.* [47–49] proposed both static and the dynamic features for trajectory guided recognition of hand gestures from the sequence of 2D frames. The main problem with trajectories made of 2D data is their susceptibility to occlusions. Recent advancements in 3D imagery shifted the focus of researchers from 2D to 3D trajectories. Wang *et al.* [53] used relative depth information, hand displacement, and concatenated body centroids to model gesture appearance. In another work [84], they used random occupancy pattern features derived from depth information to handle the effects of occlusion. Other researchers [85, 86] used a concatenated histogram of oriented gradients (HOG) feature descriptor derived from 3D data to represent the hand gesture.

In contrast to appearance-based features, tracking-based features need explicit tracking of the skeleton of the gesturing body parts and corresponding centroids. According to the findings of Sohn *et al.* [87], frequently used parameters for hand tracking include hand centroid position, velocity, acceleration, and chain code. The hand centroid location can either be obtained by segmentation [88] or 3D body skeleton [89]. Features like hand orientation can also be used for 3D trajectories of hands [90].

All the above features are then fed into a tracking algorithm, such as a Kalman filter [91] or a particle filter [92]. Kalman filtering is an optimised tracking technique employed to estimate changes over time. Its limitations include imprecision of the system model and feature measurements and probability distributions limited mainly to the Gaussian. Another powerful algorithm, the condensation algorithm

(conditional density propagation), also called particle filter or Monte Carlo algorithm, allows general representations of probability, given that objective states are often non-Gaussian. This enables the use of non-linear motion models, such as factored sampling, to approximate arbitrary probability distributions. Though the condensation algorithm is robust, particularly to background clutter, it has the disadvantage that the object model must be known in advance. Moreover, the iterative process is still prone to flounder at some step.

- Continuous gesture:** Applications using the human hand as a human–computer interface motivate researchers on continuous hand gesture recognition. For sign language, the recognition engine must support natural gesturing to enable the user's unrestricted interaction with the system. Because non-gestural movements often intersperse a gesture sequence, these movements should be removed from the video input before the gesture sequence is identified. Examples of non-gestural movements include movement epenthesis – the movement that occurs between gestures – and gesture coarticulation – the effect the end of a sign and the beginning of the next sign have on each other. In some of the cases, a gesture could be similar to a sub-part of a longer gesture also referred as the ‘*subgesture problem*’ [93]. In natural settings, gestures occur intermittently. Gesture spotting is used to locate the starting point and the endpoint of a gesture in a continuous stream of motion. Once gesture boundaries have been determined, the gesture can be extracted and classified. However, gesture spotting remains challenging for the following reasons:

- Gesture boundaries vary from one signer to another.
- Gesture boundaries are influenced by the surrounding sequence of gestures; they occur in the context of an unfolding interaction [94], and are recognised by higher-level cognitive processes.
- Gestures are unconstrained and cannot be enumerated exhaustively. Because the human body can assume virtually an infinite number of poses during the performance of a gesture, a generic model-based approach to gesture segmentation is not viable.

Gesture spotting is further complicated by individual differences among signers in the shape and duration of the same gesture and variations in how the same signer makes a gesture at different times. An ideal gesture recogniser should be able to extract gesture segments from a video stream and match them against reference patterns or templates robustly despite high spatio-temporal variability. Lee and Kim [95] addressed this problem by proposing a model to calculate the likelihood threshold of an input pattern. Fang *et al.* [96] proposed a set of transition movement models for transitions between adjacent signs. Song *et al.* [97] used a latent dynamic conditional random field with a temporal sliding window to perform online labelling and segmentation of the input sequence. Bhuyan *et al.* [98] proposed a scheme for recognising different kinds of continuous gestures.

**Table 2** Features used for gesture recognition

Feature type	Examples	Static	Dynamic	Advantages	Limitations
Spatial domain (2D)	Fingertips location, finger direction, and silhouette [100]	✓		<ul style="list-style-type: none"> <li>• Easy to extract.</li> <li>• Rotation invariant.</li> </ul>	<ul style="list-style-type: none"> <li>• Unreliable under occlusion or varying illumination.</li> <li>• Object view-dependent.</li> <li>• Distorted hand trajectory distorts MCC also.</li> </ul>
	Motion Chain Code [95, 101]		✓		
Spatial domain (3D)	Joint angles, hand location, surface texture and surface illumination [80].	✓		<ul style="list-style-type: none"> <li>• 3D modelling can most accurately represent the state of a hand, and thus can give higher recognition accuracy.</li> </ul>	<ul style="list-style-type: none"> <li>• Difficult to accurately estimate 3D shape information of a hand.</li> </ul>
Transform domain	Fourier descriptor [102], DCT descriptor [103], Wavelet descriptor [104]	✓	✓	<ul style="list-style-type: none"> <li>• RST invariant</li> </ul>	<ul style="list-style-type: none"> <li>• Not able to perfectly distinguish different gestures.</li> </ul>
Moments	Geometric moments, orthogonal moments [105]	✓	✓	<ul style="list-style-type: none"> <li>• Moments can be used to derive RST invariant global features.</li> </ul>	<ul style="list-style-type: none"> <li>• Moments are in general global features. So, moments cannot effectively represent an occluded hand.</li> </ul>
Curve fitting-based	Curvature scale space [106]		✓	<ul style="list-style-type: none"> <li>• RST invariant.</li> <li>• Resistant to noise.</li> </ul>	<ul style="list-style-type: none"> <li>• Sensitive to distortion in the boundary.</li> </ul>
Histogram-based	Histogram of gradient (HoG) features [107]	✓	✓	<ul style="list-style-type: none"> <li>• Invariant to geometry and illumination changes.</li> </ul>	<ul style="list-style-type: none"> <li>• Performance is not so satisfactory for images with a complex background and noise.</li> </ul>
Interest point-based	SIFT [108], SURF [109]	✓		<ul style="list-style-type: none"> <li>• RST and illumination invariant</li> </ul>	<ul style="list-style-type: none"> <li>• They are not the best choice for real-time applications because they are computationally expensive.</li> </ul>
Mixture of features	Combined features [110]	✓	✓	<ul style="list-style-type: none"> <li>• Incorporates the advantages of different types of features.</li> </ul>	<ul style="list-style-type: none"> <li>• Classification performance may degrade due to <i>curse of dimensionality</i>.</li> </ul>

**3.2.2 Feature extraction:** After gesture modelling, a set of features needs to be extracted for gesture recognition. Features for SGs are derived from image information like colour and texture or pose information like orientation, shape and so on. For DGs, features are based on motion and/or deformation information like position, skewness, and the velocity of hands. Samples of dynamic hand gestures are spatio-temporal patterns. A static hand gesture may be viewed as a special case of a DG with no temporal variation of the hand shape and position. A gesture model should consider both the spatial and temporal characteristics of the hand and its movements. No two samples of the same gesture will result in exactly the same hand and arm motions or the same set of visual images, i.e. gestures suffer from spatio-temporal variation. There exists spatio-temporal variation when a user performs the same gesture at different times. Every time the user performs a gesture the shape and the speed of the gesture generally vary. Even if the same person tries to perform the same sign twice, small variation in speed and position of the hands will occur. Therefore, extracted features should be rotation-scaling-translation (RST) invariant. Various features or descriptors are used in the state-of-the-art methods for VGR systems. These features can be broadly classified based on their method of extraction, such as spatial domain features, transform domain features, curve fitting-based features, histogram-based descriptors, and interest point-based descriptors. Moreover, the classifier can handle spatio-temporal variations. Recently, feature extraction techniques based on deep learning have often been applied to gesture recognition. Kong *et al.* [99] proposed a view-invariant feature extraction method using deep learning for multiview action recognition. Table 2 gives a brief survey on the properties of different features used for both static and DG recognition.

### 3.3 Recognition

The final stage of a VGR system is the recognition stage where a suitable classifier recognises the incoming gesture parameters or features and groups them into predefined classes (supervised) or by

their similarity (unsupervised). There are various classifiers used for both static and/or DG recognition, each with its own limitations. The most frequently used pattern recognition algorithms applicable to static and/or DG recognition are described below.

**3.3.1 *k*-Means:** This algorithm [111, 112] is an unsupervised classifier that determines  $k$  centre points to minimise clustering error, defined as the sum of the distances of all data points to their respective cluster centres. The classifier randomly locates  $k$  cluster centres in the feature space. Each point in the input dataset is assigned to the nearest cluster centre, and their locations are updated to the average location value for each cluster. This process is then repeated until a stopping condition is met. The stopping condition could be either a user specified maximum number of iterations or a distance threshold for the movement of cluster centres. Ghosh and Ari [113] used a  $k$ -means clustering-based radial basis function neural network (RBFNN) for static hand gesture recognition. In this work,  $k$  means clustering is used to determine the RBFNN centres.

**3.3.2 *Mean-shift clustering:*** Mean shift is a non-parametric clustering method that does not require prior knowledge of the number or distribution of the clusters [114]. The points in the  $d$ -dimensional feature space are treated as an empirical probability density function with dense regions at the local maxima or modes of the underlying distribution. A gradient ascent procedure is performed on the local estimated density for each point in the feature space until convergence. The stationary points obtained in this process serve as the modes of the distribution. The data points associated with the same stationary point belong to the same cluster. Bradski [115] proposed a modified mean shift algorithm, continuously adaptive mean shift (CamShift). CamShift was intended for head and face tracking but can also be used for hand gesture recognition [116].



**3.3.3 *k*-Nearest neighbour (*k*-NN):** *k*-NN is a non-parametric, supervised learning algorithm. Data in the feature space can be multidimensional. The training data consists of a set of labelled feature vectors. The number *k* determines how many neighbours (nearby feature vectors) influence the classification [117]. Typically, an odd value of *k* is chosen for a 2-class classification. Each neighbour may be given the same weight or those closer to the input data may be given more weight (e.g. by applying a Gaussian function). In uniform voting a new feature vector is assigned to the class to which the plurality of its neighbours belong. An alternative method is given in [118]. Hall *et al.* assumed two statistical models (Poisson and binomial) for the sample data to obtain the optimum value of *k* [119]. The *k*-NN can be used in different applications such as hand gesture-based control media player control [120], sign language recognition [121] and so on.

**3.3.4 Support vector machine (SVM):** An SVM is a supervised classifier for both linearly separable and non-separable data [122]. This method non-linearly maps the input data (if not linearly separable in current feature space) to some higher dimensional space, where the data can be linearly separated. This mapping from lower to higher dimensional spaces makes the classification of the input data simpler and more accurate. SVMs are often used for hand gesture recognition [123–126]. SVMs were originally designed for two-class classification, and an extension for multi-class classification is necessary for gesture recognition. Weston and Watkins [127] proposed an SVM structure to solve multi-class pattern recognition problem using single optimisation stage. Dardas *et al.* [108] used this method along with bag-of-features for hand gesture recognition. However, their single optimisation procedure found out to be very complicated to be implemented for real life pattern classification problems [128]. Instead of using single optimisation stage, multiple binary classifiers can be used to solve multi-class classification problem, such as ‘one-against-all’ and ‘one-against-one’ methods. Murugeswari and Veluchamy [129] used ‘one-against-one’ multi-class SVM for gesture recognition. It was found that ‘one-against-one’ method performs better than rest of the methods [128].

**3.3.5 Dynamic time warping (DTW):** DTW can find the optimal alignment of two signals in the time domain. Each element in a time series is represented by a feature vector. Hence, the DTW algorithm calculates the distance between each possible pair of points in two time series in terms of their feature vectors. DTW has been used for gesture recognition by several authors [130, 131].

**3.3.6 Finite state machine (FSM):** A gesture can be modelled as an ordered state sequence in a spatio-temporal domain using an FSM [132, 133]. The number of states varies by application. The gesture is represented by the trajectory of the hand in 2D space. Offline training is performed using a set of training data for each gesture to derive the FSM parameters for each state. The recognition of gestures can be performed online using the trained FSM. Based on the input value, the recogniser determines whether to make a state transition or to remain in the same state. A gesture has been recognised if the recogniser reaches the final state. More than one model may reach the final state for the same input data. In that case, winning criteria can be applied to choose the most probable gesture.

**3.3.7 Hidden Markov model (HMM):** An HMM is a doubly stochastic process comprised of (i) an underlying unobservable finite state Markov process and (ii) a set of random functions, each associated with a state, that produce an observable output at discrete intervals [134]. The states in the hidden stochastic layer are governed by a set of probabilities:

- i. The state transition probability distribution **A**, which gives the probability of transition from the current state to the next possible state.

- ii. The observation symbol probability distribution **B**, which gives the probability of an observation for the present state of the model.
- iii. The initial state distribution **Π**, which gives the probability of a state being an initial state.

An HMM is expressed as  $\lambda = (\mathbf{A}, \mathbf{B}, \mathbf{\Pi})$ . HMMs are often used for DG recognition [95, 135–137].

The modelling of a gesture sequence involves two phases – feature extraction and HMM training. In the first phase, a particular gesture trajectory is represented by a set of feature vectors. Each of these feature vectors describes dynamics of a hand corresponding to a particular state of a gesture. The number of such states depends on the nature and complexity of a gesture. In the second phase, the vector set is used as an input to HMM. For a given observation sequence, the key issues of HMM are

- Determination of the probability that the model will generate the observed sequence (forward-backward algorithm).
- Train and adjust the model to maximise the observation sequence probability (Baum–Welch algorithm).
- Determination of the optimal state sequence that produces the observation sequence (Viterbi algorithm).

**3.3.8 Conditional random field (CRF):** A CRF is a type of discriminative undirected probabilistic graphical model, an alternative to generative HMM model, which predicts a label for each sample of the object for structure prediction considering the context of neighbouring samples. CRFs can be used to enhance recognition accuracy by removing the requirement of conditional independence of observations (as required by generative models like HMM). Bhuyan *et al.* [101] proposed a classification technique based on CRFs on a novel set of motion chain code (MCC) features.

**3.3.9 Artificial neural network (ANN):** An ANN is a biologically inspired statistical learning algorithm for functional approximation, pattern recognition and classification. ANNs can be used as a supervised classifier for gesture recognition. Training is performed using a set of labelled input patterns. The ANN classifies new input patterns within the labelled classes. ANNs can be used to recognise static [138] and continuous hand gestures and gestures using a 3D articulated hand model [139]. They have been used with a Kinect sensor [140]. A limitation of classical ANN architectures is their inability to handle temporal sequences of features efficiently and effectively [34]. Mainly, they are unable to compensate for changes in temporal shifts and scales especially in real-time applications [42]. Out of several modified architectures, multi-state time-delay neural networks [141] can handle such changes to some extent using dynamic programming. Fuzzy-based neural networks have also been used to recognise gestures [142].

**3.3.10 Deep networks:** Deep networks are capable of finding salient latent structures within unlabelled and unstructured raw data, and can be used for both feature extraction and classification [143]. Convolutional neural networks (CNNs) [144, 145], recurrent neural networks (RNNs) [146, 147] are such type of deep networks, which can be used to handle spatio-temporal variations in gesture recognition. The convolution and pooling layers in CNN can capture discriminative features along both spatial and temporal dimensions to deal with the spatio-temporal variations in gestures. However, CNN can only exploit limited local temporal information and hence, the researchers have moved towards RNN, which can process temporal data using recurrent connections in hidden layers [148]. However, the main drawback of RNN is its short-term memory, which is insufficient for real life temporal variations in gestures. To solve this problem, long short-term memory (LSTM) [149] was proposed which can tackle longer-range temporal variations. LSTM-based deep networks can be used for efficient modelling of gestures [ ]. The spatio-temporal graphs are well known for modelling of a spatio-temporal structure. Hence, a combination of high-level spatio-temporal graphs and RNN can

**Table 3** Advantages and limitations of different classifiers used in gesture recognition

Classifier	SG <sup>a</sup>	DG <sup>b</sup>	Advantages	Limitations
<i>k</i> -means [113]	✓		<ul style="list-style-type: none"> <li>• Ease of implementation and high-speed performance.</li> <li>• Computationally efficient than hierarchical clustering.</li> <li>• Compact clustering than hierarchical clustering for globular clusters.</li> </ul>	<ul style="list-style-type: none"> <li>• Dependent on initial cluster centre values.</li> <li>• Sensitive to outliers.</li> <li>• Does not perform well in the presence of non-globular clusters.</li> <li>• Selecting an appropriate value of <i>k</i> is challenging.</li> </ul>
Mean-shift [116]	✓		<ul style="list-style-type: none"> <li>• No model assumptions unlike GMM or <i>k</i>-means.</li> <li>• Can model non-convex shaped clusters.</li> <li>• Does not depend on initialisation unlike <i>k</i>-means</li> <li>• More resistant to outliers than <i>k</i>-means</li> </ul>	<ul style="list-style-type: none"> <li>• The algorithm is computationally complex.</li> <li>• Data needs to be sufficiently dense with a discernible gradient to locate the cluster centres.</li> <li>• Susceptible to outliers or data points located between natural clusters.</li> </ul>
<i>k</i> -NN [120, 121]	✓		<ul style="list-style-type: none"> <li>• No assumptions about the characteristics of data.</li> <li>• Robust to noisy data.</li> <li>• Ease of implementation.</li> </ul>	<ul style="list-style-type: none"> <li>• Computationally intensive for a large dataset.</li> <li>• Performance degrades as the dimensionality of the feature space increases.</li> </ul>
SVM [123–126, 129]	✓	✓	<ul style="list-style-type: none"> <li>• Produces unique solution.</li> <li>• No local minima trapping due to Quadratic Programming.</li> <li>• Presence of regularisation reduces over-fitting.</li> <li>• Kernel trick helps to classify non-linearly separable data.</li> </ul>	<ul style="list-style-type: none"> <li>• Right kernel function selection is challenging.</li> <li>• Computationally expensive.</li> <li>• SVM is a binary classifier; and hence, multi-class classification requires multiple pairwise classifications.</li> <li>• Multi-class SVMs based on single optimisation [127] are difficult to implement.</li> </ul>
DTW [130, 131]	✓		<ul style="list-style-type: none"> <li>• Reliable alignment of two temporal patterns of different lengths.</li> <li>• No full-model retraining for an inclusion/exclusion of a training gesture.</li> <li>• Independent template computation.</li> </ul>	<ul style="list-style-type: none"> <li>• Requires a large number of training samples for the selection of appropriate templates.</li> <li>• DTW has to align the test and prototype trajectories during each classification. This increases the computational load of classification for large gesture vocabulary size.</li> </ul>
FSM [132, 133]	✓		<ul style="list-style-type: none"> <li>• Can handle patterns of different lengths and states.</li> <li>• An FSM can adapt quickly to accommodate spatio-temporal variability during the training phase, and is therefore robust to any variation in length of the input gesture sequences.</li> <li>• Gesture model is available immediately in an FSM based system.</li> </ul>	<ul style="list-style-type: none"> <li>• Large FSM with many states and transitions can be difficult to manage and maintain.</li> <li>• The state transition conditions are rigid.</li> </ul>
HMM [95, 135–137]	✓		<ul style="list-style-type: none"> <li>• Handles spatio-temporal variations of gestures better than FSM.</li> </ul>	<ul style="list-style-type: none"> <li>• The number of states and the structure of the HMM must be predefined.</li> <li>• Statistical nature of an HMM precludes a rapid training phase. Well-aligned data segments are required to train an HMM.</li> <li>• The stationarity assumption in HMM may not hold true for a complete gestural action.</li> </ul>
CRF [101]	✓		<ul style="list-style-type: none"> <li>• No requirement of conditional independence of observations.</li> <li>• Handles label bias problem.</li> </ul>	<ul style="list-style-type: none"> <li>• High computational complexity during training makes it difficult to re-train the model when new training gesture sequences become available.</li> <li>• CRFs cannot recognise totally unknown gestures, i.e. gestures which are not present in the training dataset.</li> </ul>
ANN [141, 142]	✓	✓	<ul style="list-style-type: none"> <li>• Non-parametric, non-linear model.</li> <li>• Adaptive to complex/abstract problems.</li> </ul>	<ul style="list-style-type: none"> <li>• Difficult to set parameters (e.g. the optimal number of nodes, hidden layers, sigmoid functions).</li> <li>• Training is computationally intensive and requires a large set of training data for obtaining acceptable performance.</li> <li>• It acts like a ‘black box,’ and hence, it is difficult to identify errors in a complex network.</li> </ul>
Deep networks [144–153]	✓	✓	<ul style="list-style-type: none"> <li>• Significant reduction in feature engineering process.</li> <li>• Distributed representation of data.</li> </ul>	<ul style="list-style-type: none"> <li>• A potential problem of deep networks is that it is difficult to get an optimised solution for non-convex and non-linear systems.</li> <li>• Require large amount of training data.</li> </ul>

<sup>a</sup>SG = static gesture.<sup>b</sup>DG = dynamic gesture.

also be used to solve spatio-temporal modelling problem of RNN [150]. Deep learning techniques can give outstanding performance in both feature extraction and recognition owing to their built-in

feature learning capability. The effective and efficient algorithms of deep networks are capable of solving complex optimisation tasks.

The main advantages and limitations of different classifiers used for static and/or DG recognition are enumerated in Table 3.

## 4 Conclusion

Hand gesture recognition is an important research area in computer vision with many applications to human–computer interaction. Use of gesture-based interface has a great potential in assisting humans in their day to day problems. In recent years, vision-based gesture recognition is successfully used in different applications such as healthcare and medicine, virtual reality, and driver monitoring. However, vision-based recognition is extremely challenging not only because of its diverse contexts, multiple interpretations, and spatio-temporal variations but, also because of the complex non-rigid properties of the human hand. The existing classifiers used for vision-based gesture recognition are not capable of simultaneously handling all the gesture classification problems. Each has drawbacks limiting overall performance.

Vision-based gesture recognition typically depends on three stages: gesture detection and pre-processing; gesture representation and feature extraction; and recognition. Detection includes various kinds of imaging systems, whereas pre-processing includes segmentation of gesturing body parts and occlusion handling. Accurate detection of gestures is difficult because of varying illumination, shadows, complex background, and other factors. The complex articulated shape of the hand makes it harder to model the appearance of both static and DGs. Variation of gesture parameters due to spatio-temporal variance in hand postures makes the recognition process more difficult. A gesture can be represented using an appropriate model based on the spatio-temporal properties of the gesture. Each of these models have their own advantages and disadvantages, which affect the overall performance of a gesture recognition system. Gesture modelling is followed by the selection and extraction of appropriate features. Extracted features should be RST invariant, object view independent, and computationally inexpensive. Selection of a feature also depends on the nature of gestures. The third stage of gesture recognition module consists of a classifier, which classifies the input gesture into an unknown (unsupervised) or a known class (supervised). However, every classifier has its own limitations. This paper surveyed the major constraints in the different stages of a VGR system. A VBI is expected to enable a user to interact with a machine with natural human-to-human interactions in an unconstrained environment. Its performance should be accurate irrespective of changes in the environment. However, most existing VGR systems are only working in a limited range of indoor applications. Also, the same gesture can have different meanings in different cultures. Thus, a lack of cross-cultural conventions limits their global acceptance. Feedback is also required to indicate the correctness of the input gestures. Feedback provides the user some means of self-learning of the necessary gestures and the contexts to be used. Present gesture-based interfaces generally lack required feedback for VGR system validation.

## 5 References

- [1] 'ACM SIGCHI curricula for human–computer interaction', <http://www.acm.org/sigchi/cdg/cdg2.html>, accessed 1992
- [2] Preece, J., Carey, T., Rogers, Y., et al.: 'Human-computer interaction' (Pearson Educ. Ltd., 1994)
- [3] Dix, A., Finlay, J.E., Abowd, G.D., et al.: 'Human-computer interaction' (Prentice-Hall, Inc., 2003, 3rd edn.)
- [4] Jaimes, A., Sebe, N.: 'Multimodal human-computer interaction: a survey', *Comput. Vis. Image Underst.*, 2007, **108**, (1–2), pp. 116–134
- [5] Moeslund, T.B., Hilton, A., Krüger, V.: 'A survey of advances in vision-based human motion capture and analysis', *Comput. Vis. Image Underst.*, 2006, **104**, (2), pp. 90–126
- [6] Sandbach, G., Zafeiriou, S., Pantic, M., et al.: 'Static and dynamic 3D facial expression recognition: a comprehensive survey', *Image Vis. Comput.*, 2012, **30**, (10), pp. 683–697
- [7] Kumar, S., Bhuyan, M.K., Chakraborty, B.K.: 'Extraction of informative regions of a face for facial expression recognition', *IET Comput. Vis.*, 2016, **10**, (6), p. 567–576
- [8] Song, F., Tan, X., Chen, S., et al.: 'A literature survey on robust and efficient eye localization in real-life scenarios', *Pattern Recogn.*, 2013, **46**, (12), pp. 3157–3173
- [9] Mitra, S., Acharya, T.: 'Gesture recognition: a survey', *IEEE Trans. Syst. Man, Cybern. C, Appl. Rev.*, 2007, **37**, (3), pp. 311–324
- [10] El Ayadi, M., Kamel, M.S., Karray, F.: 'Survey on speech emotion recognition: features, classification schemes, and databases', *Pattern Recogn.*, 2011, **44**, (3), pp. 572–587
- [11] Kinnunen, T., Li, H.: 'An overview of text-independent speaker recognition: from features to supervectors', *Speech Commun.*, 2010, **52**, (1), pp. 12–40
- [12] Li, J., Deng, L., Gong, Y., et al.: 'An overview of noise-robust automatic speech recognition', *IEEE/ACM Trans. Audio, Speech, Lang. Process.*, 2014, **22**, (4), pp. 745–777
- [13] Kumar, P., Rautaray, S., Agrawal, A.: 'Hand data glove: a new generation real-time mouse for human-computer interaction'. Proc. 1st Int. Conf. Recent Advances in Information Technology, 2012, pp. 750–755
- [14] Pantic, M., Rothkrantz, L.J.M.: 'Toward an affect-sensitive multimodal human-computer interaction', *Proc. IEEE*, 2003, **91**, (9), pp. 1370–1390
- [15] Oviatt, S.: 'Multimodal interfaces', in Sears, A., Jacko, J.A. (Eds.): 'The human-computer interaction handbook: fundamentals, evolving technologies, and emerging application (human factors and ergonomics series)' (L. Erlbaum Associates Inc., Hillsdale, NJ, USA, 2007), ch. 18
- [16] Jiang, R., Sadka, A., Crookes, D.: 'Multimodal biometric human recognition for perceptual human-computer interaction', *IEEE Trans. Syst. Man Cybern. C, Appl. Rev.*, 2010, **40**, (6), pp. 676–681
- [17] Lichtenauer, J.F., Hendriks, E.A., Reinders, M.J.T.: 'Sign language recognition by combining statistical DTW and independent classification', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2008, **30**, (11), pp. 2040–2046
- [18] Sagayam, K.M., Hemanth, D.J.: 'Hand posture and gesture recognition techniques for virtual reality applications: a survey', *Virtual Real.*, 2017, **21**, (2), pp. 91–107
- [19] Kulshreshtha, A., Pfeil, K., LaViola, J.J.: 'Enhancing the gaming experience using 3D spatial user interface technologies', *IEEE Comput. Graph. Appl.*, 2017, **38**, (3), pp. 16–23
- [20] Reifinger, S., Wallhoff, F., Ablassmeier, M., et al.: 'Static and dynamic hand-gesture recognition for augmented reality applications'. Proc. Int. Conf. Human-Computer Interaction, Beijing, China, 2007, pp. 728–737
- [21] McCowan, I., Gatica-Perez, D., Bengio, S., et al.: 'Automatic analysis of multimodal group actions in meetings', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2005, **27**, (3), pp. 305–317
- [22] Ng, W.L., Ng, C.K., Noord, N.K., et al.: 'Gesture based automating household appliances'. Proc. Int. Conf. Human-Computer Interaction, Beijing, China, 2011, pp. 285–293
- [23] Jacob, M., Cange, C., Packer, R., et al.: 'Intention, context and gesture recognition for sterile MRI navigation in the operating room', in Alvarez, L., Mejail, M., Gomez, L., et al. (Eds.): 'Progress in pattern recogn., image anal., comput. vis., and applicat.', ser. Lecture Notes in Comput. Sci., (Springer, Berlin Heidelberg, 2012), vol. **7441**, pp. 220–227
- [24] Tao, L., Zappella, L., Hager, G., et al.: 'Surgical gesture segmentation and recognition', in Mori, K., Sakuma, I., Sato, Y., Barillot, C. (Eds.): 'Med. image comput. and comput. – assisted intervention MICCAI 2013', ser. Lecture Notes in Comput. Sci., (Springer, Berlin Heidelberg, 2013), vol. **8151**, pp. 339–346
- [25] Kim-Tien, N., Truong-Thinh, N., Cuong, T.: 'A method for controlling wheelchair using hand gesture recognition', in Kim, J.-H., Matson, E.T., Myung, H. et al. (Eds.): 'Robot intell. technol. and applicat. 2012', ser. Advances in Intell. Syst. and Comput., (Springer, Berlin Heidelberg, 2013), vol. **208**, pp. 961–970
- [26] Smith, P., Shah, M., da Vitoria Lobo, N.: 'Determining driver visual attention with one camera', *IEEE Trans. Intell. Transp. Syst.*, 2003, **4**, (4), pp. 205–218
- [27] Pickering, C.: 'The search for a safer driver interface: a review of gesture recognition human machine interface', *J. Comput. Control Eng.*, 2005, **16**, (1), pp. 34–40
- [28] Zeng, B., Wang, G., Lin, X.: 'A hand gesture based interactive presentation system utilizing heterogeneous cameras', *Tsinghua Sci. Technol.*, 2012, **17**, (3), pp. 329–336
- [29] Hariharan, B., Padmini, S., Gopalakrishnan, U.: 'Gesture recognition using Kinect in a virtual classroom environment'. Proc. Fourth Int. Conf. Digital Information and Communication Technology and its Applications (DICTAP), Bangkok, 2014, pp. 118–124
- [30] Arafat, Y., Mamdani, A.: 'Building multi-modal personal sales agents as interfaces to e-commerce applications', in Liu, J., Yuen, P., Li, C.-h., Ng, J., Ishida, T. et al. (Eds.): 'Active media technol., in lecture notes in comput. sci.', (Springer, Berlin Heidelberg, 2001), vol. **2252**, pp. 113–133
- [31] Zhang, Z.: 'Microsoft kinect sensor and its effect', *IEEE MultiMedia*, 2012, **19**, (2), pp. 4–10
- [32] Kumara, W.G.C.W., Wattanachote, K., Battulga, B., et al.: 'A kinect-based assessment system for smart classroom', *Int. J. Dist. Edu. Technol. (IJDET)*, 2017, **13**, (2), pp. 34–53
- [33] 'SoftKinetic's gesture control technology rolls out in additional car model', <https://www.softkinetic.com/AboutUs/NewsEvents/ArticleView/ArticleId/545/PRESS-RELEASE-SoftKinetic-s-Gesture-Control-Technology-Rolls-Out-in-Additional-Car-Model.html>, accessed May 2017
- [34] Pavlovic, V., Sharma, R., Huang, T.: 'Visual interpretation of hand gestures for human-computer interaction: a review', *IEEE Trans. Pattern Anal. Mach. Intell.*, 1997, **19**, (7), pp. 677–695
- [35] Wu, Y., Huang, T.S.: 'Vision-based gesture recognition: a review'. Proc. Int. Gesture Workshop on Gesture-Based Communication in Human-Computer Interaction, 1999, pp. 103–115
- [36] Moeslund, T.B., Granum, E.: 'A survey of computer vision-based human motion capture', *Comput. Vis. Image Underst.*, 2001, **81**, (3), pp. 231–268
- [37] Derpanis, K.G.: 'A review of vision-based hand gestures', Dept. of Comput. Sci. York University, Internal Rep., 2004
- [38] Erol, A., Bebis, G., Nicolescu, M., et al.: 'Vision-based hand pose estimation: a review', *Comput. Vis. Image Underst.*, 2007, **108**, (1–2), pp. 52–73

- [39] Moni, M.A., Ali, A.: 'HMM based hand gesture recognition: a review on techniques and approaches'. Proc. 2nd IEEE Int. Conf. Computer Science and Information Technology (ICCSIT), August 2009, pp. 433–437
- [40] Wachs, J.P., Kölsch, M., Stern, H., *et al.*: 'Vision-based hand-gesture applications', *Commun. ACM*, 2011, **54**, (2), pp. 60–71
- [41] Suarez, J., Murphy, R.: 'Hand gesture recognition with depth images: a review'. Proc. IEEE RO-MAN, 2012, pp. 411–417
- [42] Rautaray, S., Agrawal, A.: 'Vision based hand gesture recognition for human computer interaction: a survey', *Artif. Intell. Rev.*, 2012, **43**, (1), pp. 1–54
- [43] Hasan, H., Abdul-Kareem, S.: 'Human-computer interaction using vision-based hand gesture recognition systems: a survey', *Neural Comput. Appl.*, 2014, **25**, (2), pp. 251–261
- [44] Cheng, H., Yang, L., Liu, Z.: 'Survey on 3D hand gesture recognition', *IEEE Trans. Circuits Syst. Video Technol.*, 2016, **26**, (9), pp. 1659–1673
- [45] Karam, M.: 'A framework for research and design of gesture based human-computer interactions', PhD dissertation, University of Southampton, October 2006
- [46] Campbell, L., Becker, D., Azarbayejani, A., *et al.*: 'Invariant features for 3-d gesture recognition'. Proc. 2nd Int. Conf. Automatic Face and Gesture Recognition, October 1996, pp. 157–162
- [47] Bhuyan, M.K., Ghosh, D., Bora, P.: 'Feature extraction from 2D gesture trajectory in dynamic hand gesture recognition'. Proc. IEEE Conf. Cybernetics and Intelligent Systems, June 2006, p. 1–6
- [48] Bhuyan, M.K., Ghosh, D., Bora, P.: 'Continuous hand gesture segmentation and co-articulation detection', in Kalra, P., Peleg, S. (Eds.): 'Computer vision, graphics and image processing', in Lecture Notes in Computer Science' (Springer, Berlin Heidelberg, 2006), vol. **4338**, pp. 564–575
- [49] Bhuyan, M.K., Ghosh, D., Bora, P.: 'Estimation of 2D motion trajectories from video object planes and its application in hand gesture recognition', in Pal, S., Bandyopadhyay, S., Biswas, S. (Eds.): 'Pattern recognition and machine intelligence', in Lecture Notes in Computer Science (Springer, Berlin Heidelberg, 2005), vol. **3776**, pp. 509–514
- [50] Berman, S., Stern, H.: 'Sensors for gesture recognition systems', *IEEE Trans. Syst. Man Cybern. Syst. C, Appl. Rev.*, 2012, **42**, (3), pp. 277–290
- [51] Socolinsky, D.A., Selinger, A.: 'A comparative analysis of face recognition performance with visible and thermal infrared imagery'. Proc. Int. Conf. Pattern Recognition, 2002, vol. 4, pp. 217–222
- [52] Zhenyao, M., Neumann, U.: 'Real-time hand pose recognition using low-resolution depth images'. Proc. CVPR, 2006, pp. 1499–1505
- [53] Wang, Y., Yu, T., Shi, L., *et al.*: 'Using human body gestures as inputs for gaming via depth analysis'. Proc. IEEE Int. Conf. Multimedia and Expo, June 2008, pp. 993–996
- [54] Cerlinca, T., Pentiu, S.: 'Robust 3D hand detection for gestures recognition', in Brazier, F., Nieuwenhuis, K., Pavlin, G., Warnier, M., BadicalIntell, C. *et al.* (Eds): 'Distrib. comput. V, ser. stud. in comput. Intell' (Springer, Berlin Heidelberg, 2012), vol. **382**, pp. 259–264
- [55] Hongo, H., Ohya, M., Yasumoto, M., *et al.*: 'Focus of attention for face and hand gesture recognition using multiple cameras'. Proc. Fourth IEEE Int. Conf. Automatic Face and Gesture Recognition, 2000, pp. 156–161
- [56] Tsai, C.Y., Lee, Y.H.: 'Multiple-camera-based gesture recognition by MDA method'. Proc. Fifth Int. Conf. Fuzzy Systems and Knowledge Discovery, 2008, vol. 3, pp. 599–603
- [57] Ogawara, K., Takamatsu, J., Hashimoto, K., *et al.*: 'Grasp recognition using a 3D articulated model and infrared images'. Proc. IEEE/RSJ Int. Conf. Intelligent Robots and Systems (IROS), October 2003, pp. 1590–1595
- [58] Droschel, D., Stuckler, J., Behnke, S.: 'Learning to interpret pointing gestures with a time-of-flight camera'. Proc. 6th ACM/IEEE Int. Conf. Human-Robot Interaction (HRI), March 2011, pp. 481–488
- [59] Uebbersax, D., Gall, J., Van den Bergh, M., *et al.*: 'Real-time sign language letter and word recognition from depth data'. Proc. IEEE Int. Conf. Computer Vision Workshops (ICCV Workshops), November 2011, pp. 383–390
- [60] Gonzalez-Sanchez, T., Puig, D.: 'Real-time body gesture recognition using depth camera', *Electron. Lett.*, 2011, **47**, (12), pp. 697–698
- [61] 'Introduction to the Time-of-Flight (ToF) system design – user's guide', <http://www.ti.com/lit/ml/sbau219d/sbau219d.pdf>, accessed 2014
- [62] 'Basler ToF Camera. USER'S MANUAL', <https://www.baslerweb.com/en/support/downloads/document-downloads/basler-tof-camera-users-manual/html>, accessed 2016
- [63] Ren, Z., Yuan, J., Meng, J., *et al.*: 'Robust part-based hand gesture recognition using kinect sensor', *IEEE Trans. Multimedia*, 2013, **15**, (5), pp. 1110–1120
- [64] Rioux-Maldague, L., Giguere, P.: 'Sign language finger spelling classification from depth and color images using a deep belief network'. Proc. Canadian Conf. Computer and Robot Vision (CRV), May 2014, pp. 92–97
- [65] Regenbrecht, J.C.H., Hoermann, S.: 'A leap-supported, hybrid interface approach'. Proc. Australia on Computer-Human Interaction Conf., 2013, pp. 281–284
- [66] Lu, W., Tong, Z., Chu, J.: 'Dynamic hand gesture recognition with leap motion controller', *IEEE Signal Process. Lett.*, 2016, **23**, (9), pp. 1188–1192
- [67] Porfiro, A.J., Oliveira, L.E.S., Lais Wiggers, K., *et al.*: 'Libras sign language hand configuration recognition based on 3D meshes'. Proc. IEEE SMC, October 2013, pp. 1588–1593
- [68] Juang, C.-F., Chiu, S.-H., Shiu, S.-J.: 'Fuzzy system learned through fuzzy clustering and support vector machine for human skin color segmentation', *IEEE Trans. Syst. Man Cybern. A, Syst. Humans*, 2007, **37**, (6), pp. 1077–1087
- [69] Juang, C.-F., Chang, C.-M., Wu, J.-R., *et al.*: 'Computer vision based human body segmentation and posture estimation', *IEEE Trans. Syst. Man Cybern. A, Syst. Humans*, 2009, **39**, (1), pp. 119–133
- [70] Powar, V., Jahagirdar, A., Sisrikar, S.: 'Skin detection in YCbCr color space'. IJCA Proc. Int. Conf. Computational Intelligence, March 2012
- [71] Störting, M., Andersen, H.J., Granum, E.: 'Skin color detection under changing lighting conditions'. Proc. 7th Symp. Intelligent Robotic Systems, 1999, pp. 187–195
- [72] Chakraborty, B.K., Bhuyan, M.K., Kumar, S.: 'Fusion-based skin detection using image distribution model'. Proc. Tenth Indian Conf. Computer Vision, Graphics and Image Processing, 2016, pp. 67:1–67:8
- [73] Chakraborty, B.K., Bhuyan, M.K., Kumar, S.: 'Combining image and global pixel distribution model for skin colour segmentation', *Pattern Recognit. Lett.*, 2017, **41**, pp. 33–40
- [74] Kawulok, M., Kawulok, J., Nalepa, J.: 'Spatial-based skin detection using discriminative skin-presence features', *Pattern Recognit. Lett.*, 2014, **8**, pp. 3–13
- [75] Chakraborty, B.K., Bhuyan, M.K.: 'Skin segmentation using possibilistic fuzzy c-means clustering in presence of skin-colored background'. Proc. IEEE Recent Advances in Intelligent Computational Systems, December 2015, pp. 246–250
- [76] Lee, J., Kunii, T.: 'Constraint-based hand animation', in Thalmann, N., Thalmann, D. (Eds.): 'Models and techn. in comput. animation, ser. comput. animation series' (Springer, Japan, 1993), pp. 110–127
- [77] Shotton, J., Fitzgibbon, A., Cook, M., *et al.*: 'Real-time human pose recognition in parts from single depth images'. Proc. Conf. Computer Vision & Pattern Recognition, CVPR, June 2011, pp. 1297–1304
- [78] Keskin, C., Kirac, F., Kara, Y.E., *et al.*: 'Real time hand pose estimation using depth sensors' (Springer, 2013), pp. 119–137
- [79] Yao, Y., Fu, Y.: 'Real-time hand pose estimation from RGB-D sensor'. Proc. IEEE Int. Conf. Multimedia and Expo, July 2012, pp. 705–710
- [80] de La Gorce, M., Paragios, N.: 'A variational approach to monocular hand-pose estimation', *Comput. Vis. Image Underst.*, 2010, **114**, (3), pp. 363–372
- [81] de La Gorce, M., Fleet, D.J., Paragios, N.: 'Model-based 3D hand pose estimation from monocular video', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2011, **33**, (9), pp. 1793–1805
- [82] Oikonomidis, I., Kyriazis, N., Argyros, A.: 'Markerless and efficient 26-DOF hand pose recovery'. Proc. of the Asian Conf. Computer Vision, ACCV, 2010, pp. 744–757
- [83] Oikonomidis, I., Kyriazis, N., Argyros, A.: 'Efficient model-based 3D tracking of hand articulations using kinect'. Proc. British Machine Vision Conf., 2011, pp. 101.1–101.11
- [84] Wang, J., Liu, Z., Chorowski, J., *et al.*: 'Robust 3D action recognition with random occupancy patterns'. Proc. of the Asian Conf. Computer Vision, ECCV, 2012, pp. 872–885
- [85] Liang, B.: 'Gesture recognition using depth images'. Proc. 15th ACM Int. Conf. Multimodal Interaction, 2013, pp. 353–356
- [86] Ohn-Bar, E., Trivedi, M.M.: 'The power is in your hands: 3D analysis of hand gestures in naturalistic video'. Proc. IEEE Conf. Computer Vision and Pattern Recognition Workshops, June 2013, pp. 912–917
- [87] Sohn, M.-K., Lee, S.-H., Kim, D.-J., *et al.*: 'A comparison of 3D hand gesture recognition using dynamic time warping'. Proc. 27th Conf. Image Vision Computing, 2012, pp. 418–422
- [88] Doliotis, P., Stefan, A., McMurrough, C., *et al.*: 'Comparing gesture recognition accuracy using color and depth information'. Proc. 4th Int. Conf. Pervasive Technologies Related to Assistive Environments, 2011, pp. 20:1–20:7
- [89] Zhu, H.M., Pun, C.M.: 'Real-time hand gesture recognition from depth image sequences'. Proc. 9th Int. Conf. Computer Graphics, Imaging, Visualization, July 2012, pp. 49–52
- [90] Xu, D., Chen, Y.L., Lin, C., *et al.*: 'Real-time dynamic gesture recognition system based on depth perception for robot navigation'. Proc. IEEE Int. Conf. Robotics and Biomimetics (ROBIO), December 2012, pp. 689–694
- [91] Dondi, P., Lombardi, L., Porta, M.: 'Development of gesture-based human computer interaction applications by fusion of depth and color video streams', *IET Comput. Vis.*, 2014, **8**, (6), pp. 568–578
- [92] Chai, Y., Shin, S., Chang, K., *et al.*: 'Real-time user interface using particle filter with integral histogram', *IEEE Trans. Consum. Electron.*, 2010, **56**, (2), pp. 510–515
- [93] Alon, J., Athitsos, V., Yuan, Q., *et al.*: 'A unified framework for gesture recognition and spatiotemporal gesture segmentation', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2009, **31**, (9), pp. 1685–1699
- [94] Dourish, P.: 'What we talk about when we talk about context', *Pers. Ubiquitous Comput.*, 2004, **8**, (1), pp. 19–30
- [95] Lee, H.-K., Kim, J.: 'An HMM-based threshold model approach for gesture recognition', *IEEE Trans. Pattern Anal. Mach. Intell.*, 1999, **21**, (10), pp. 961–973
- [96] Fang, G., Gao, W., Zhao, D.: 'Large-vocabulary continuous sign language recognition based on transition-movement models', *IEEE Trans. Syst. Man Cybern. A, Syst. Humans*, 2007, **37**, (1), pp. 1–9
- [97] Song, Y., Demirdjian, D., Davis, R.: 'Continuous body and hand gesture recognition for natural human-computer interaction', *ACM Trans. Interact. Intell. Syst.*, 2012, **2**, (1), pp. 5:1–5:28
- [98] Bhuyan, M.K., Bora, P.K., Ghosh, D.: 'An integrated approach to the recognition of a wide class of continuous hand gestures', *Int. J. Pattern Recogn. Artif. Intell.*, 2011, **25**, (2), pp. 227–252
- [99] Kong, Y., Ding, Z., Li, J., *et al.*: 'Deeply learned view-Invariant features for cross-View action recognition', *IEEE Trans. Image Process.*, 2017, **26**, (6), pp. 3028–3037
- [100] Nguyen, T.N., Vo, D.H., Huynh, H.H., *et al.*: 'Geometry based static hand gesture recognition using support vector machine'. Proc. 13th Int. Conf. Control, Automation, Robotics and Vision, December 2014, pp. 769–774
- [101] Bhuyan, M.K., Ajay Kumar, D., MacDorman, K., *et al.*: 'A novel set of features for continuous hand gesture recognition', *J. Multimodal User Interfaces*, 2014, **8**, (4), pp. 333–343
- [102] Harding, P.R., Ellis, T.J.: 'Recognizing hand gesture using Fourier descriptors'. Proc. Int. Conf. Pattern Recognition, 2004, pp. 286–289



- [103] Akhter, I., Sheikh, Y., Khan, S., *et al.*: 'Trajectory space: a dual representation for nonrigid structure from motion', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2011, **33**, (7), pp. 1442–1456
- [104] Hung, K.C.: 'The generalized uniqueness wavelet descriptor for planar closed curves', *IEEE Trans. Image Process.*, 2000, **9**, (5), pp. 834–845
- [105] Priyal, S.P., Bora, P.K.: 'A study on static hand gesture recognition using moments', Proc. 2010 Int. Conf. Signal Processing and Communication, July 2010, pp. 1–5
- [106] Wu, X., Cia, M., Chen, L., *et al.*: 'Point context: an effective shape descriptor for RST-invariant trajectory recognition', *J. Math. Imag. Vis.*, 2016, **56**, (3), pp. 441–454
- [107] Feng, K.P., Yuan, F.: 'Static hand gesture recognition based on hog characters and support vector machines', Proc. 2nd Int. Symp. Instrumentation and Measurement, Sensor Network and Automation, December 2013, pp. 936–938
- [108] Dardas, N., Chen, Q., Georganas, N.D., *et al.*: 'Hand gesture recognition using Bag-of-features and multi-class support vector machine', Proc. Int. Symp. Haptic Audio-Visual Environments and Games, October 2010, pp. 1–5
- [109] Zhang, R., Ming, Y., Sun, J.: 'Hand gesture recognition with SURF-BOF based on gray threshold segmentation', Proc. Int. Signal Processing, November 2016, pp. 118–122
- [110] Ghosh, D.K., Ari, S.: 'Static hand gesture recognition using mixture of features and SVM classifier', Proc. 5th Int. Conf. Communication Systems and Network Technologies, April 2015, pp. 1094–1099
- [111] Forgy, E.W.: 'Cluster analysis of multivariate data: efficiency vs interpretability of classifications', *Biometrics*, 1965, **21**, pp. 768–769
- [112] Macqueen, J.: 'Some methods for classification and analysis of multivariate observations', Proc. 5th Berkeley Symp. Mathematical Statistics and Probability, 1967, pp. 281–297
- [113] Ghosh, D.K., Ari, S.: 'A static hand gesture recognition algorithm using k-mean based radial basis function neural network', Proc. 8th Int. Conf. Information, Communication, and Signal Processing, 2011, pp. 1–5
- [114] 'Mean shift clustering, lecture notes', [http://www.cse.yorku.ca/kosta/CompVis/Notes/mean shift.pdf](http://www.cse.yorku.ca/kosta/CompVis/Notes/mean%20shift.pdf)
- [115] Bradski, G.: 'Real time face and object tracking as a component of a perceptual user interface', Proc. 4th IEEE Workshop Applications of Computer Vision (WACV), October 1998, pp. 214–219
- [116] Nadgeri, S., Sawarkar, S., Gawande, A.: 'Hand gesture recognition using camshift algorithm', Proc. 3rd Int. Conf. Emerging Trends in Engineering and Technology (ICETET), November 2010, pp. 37–41
- [117] 'A detailed introduction to k-nearest neighbor (knn) algorithm', <http://saravananthirumuruganathan.wordpress.com/2010/05/17/a-detailed-introduction-to-k-nearest-neighbor-knn-algorithm/>
- [118] Coomans, D., Massart, D.: 'Alternative k-nearest neighbour rules in supervised pattern recognition – part 1: k-nearest neighbour classification by using alternative voting rules', *Anal. Chim. Acta*, 1982, **136**, pp. 15–27
- [119] Hall, P., Park, B.U., Samworth, R.J.: 'Choice of neighbor order in nearest-neighbor classification', *Ann. Statist.*, 2008, **36**, (5), pp. 2135–2152
- [120] Marasovic, T., Papic, V.: 'Feature weighted nearest neighbour classification for accelerometer-based gesture recognition', Proc. 20th Int. Conf. Software in Telecommunications and Computer Networks (SoftCOM), September 2012, pp. 1–5
- [121] Gupta, B., Shukla, P., Mittal, A.: 'K-nearest correlated neighbor classification for Indian sign language gesture recognition using feature fusion', Proc. Int. Conf. Computer Communication Information (ICCCI), Coimbatore, 2016, pp. 1–5
- [122] Burges, C.J.C.: 'A tutorial on support vector machines for pattern recognition', *Data Min. Knowl. Discov.*, 1998, **2**, (2), pp. 121–167
- [123] Dardas, N., Georganas, N.D.: 'Real-time hand gesture detection and recognition using bag-of-features and support vector machine techniques', *IEEE Trans. Instrum. Meas.*, 2011, **60**, (11), pp. 3592–3607
- [124] Keskin, C., Kirac, F., Kara, Y.: 'Real time hand pose estimation using depth sensors', Proc. IEEE Int. Conf. Computer Vision Workshops (ICCV Workshops), November 2011, pp. 1228–1234
- [125] Liu, L., Xing, J., Ai, H., *et al.*: 'Hand posture recognition using finger geometric feature', Proc. 21st Int. Conf. Pattern Recognition (ICPR), November 2012, pp. 565–568
- [126] Rodriguez, K.O., Chavez, G.C.: 'Finger spelling recognition from RGB-D information using kernel descriptor', 26th SIBGRAPI Conf. Graphics, Patterns and Images (SIBGRAPI), August 2013, pp. 1–7
- [127] Weston, J., Watkins, C.: 'Multi-class support vector machines', Proc. European Symp. Artificial Neural Networks (ESANN), 1999, pp. 219–224
- [128] Hsu, C.-W., Lin, C.-J.: 'A comparison of methods for multiclass support vector machines', *IEEE Trans. Neural Netw.*, 2002, **13**, (2), pp. 415–425
- [129] Murugeswari, M., Veluchamy, S.: 'Hand gesture recognition system for real-time application', Proc. Int. Conf. Advanced Communication Control and Computing Technologies, 2014, pp. 1220–1225
- [130] Wenjun, T., Chengdong, W., Shuying, Z., *et al.*: 'Dynamic hand gesture recognition using motion trajectories and key frames', Proc. 2nd Int. Conf. Advanced Computer Control (ICACC), vol. 3, March 2010, pp. 163–167
- [131] Hussain, S., Rashid, A.: 'User independent hand gesture recognition by accelerated DTW', Proc. Int. Conf. Informatics, Electronics and Vision (ICIEV), May 2012, pp. 1033–1037
- [132] Hong, P., Turk, M., Huang, T.: 'Gesture modelling and recognition using finite state machines', Proc. 4th IEEE Int. Conf. Automatic Face and Gesture Recognition, 2000, pp. 410–415
- [133] Bhuyan, M.K.: 'FSM-based recognition of dynamic hand gestures via gesture summarization using key video object planes', *World Acad. Sci., Eng. Technol.*, 2012, **6**, (68), pp. 724–735
- [134] Rabiner, L., Juang, B.-H.: 'An introduction to hidden Markov models', *IEEE ASSP Mag.*, 1986, **3**, (1), pp. 4–16
- [135] Kwon, J., Park, F.: 'Natural movement generation using hidden Markov models and principal components', *IEEE Trans. Syst. Man Cybern. B, Syst. Cybern.*, 2008, **38**, (5), pp. 1184–1194
- [136] Heracleous, P., Aboutabit, N., Beauteemps, D.: 'Lip shape and hand position fusion for automatic vowel recognition in cued speech for French', *IEEE Signal Process. Lett.*, 2009, **16**, (5), pp. 339–342
- [137] Peng, S.-Y., Wattanachote, K., Lin, H.-J., *et al.*: 'A real-time hand gesture recognition system for daily information retrieval from internet', Proc. 4th Int. Conf. Ubi-Media Computing, July 2011, pp. 146–151
- [138] Hasan, H., Abdul-Kareem, S.: 'Static hand gesture recognition using neural networks', *Artif. Intell. Rev.*, 2014, **41**, (2), pp. 147–181
- [139] Nolkar, C., Ritter, H.: 'Visual recognition of continuous hand postures', *IEEE Trans. Neural Netw.*, 2002, **13**, (4), pp. 983–994
- [140] Patsadu, O., Nukoolkit, C., Watanapa, B.: 'Human gesture recognition using kinect camera', Proc. Int. Joint Conf. Computer Science and Software Engineering (JCSSE), May 2012, pp. 28–32
- [141] Yang, M.-H., Ahuja, N., Tabb, M.: 'Extraction of 2D motion trajectories and its application to hand gesture recognition', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2002, **24**, (8), pp. 1061–1074
- [142] Varkonyi-Koczy, A., Tusor, B.: 'Human-computer interaction for smart environment applications using fuzzy hand posture and gesture models', *IEEE Trans. Instrum. Meas.*, 2011, **60**, (5), pp. 1505–1514
- [143] Krizhevsky, A., Sutskever, I., Hinton, G.E.: 'ImageNet classification with deep convolutional neural networks', Proc. Conf. Advances in Neural Information Processing Systems, 2012, pp. 1106–1114
- [144] Kim, Y., Toomajian, B.: 'Hand gesture recognition using micro-Doppler signatures with convolutional neural network', *IEEE Access*, 2016, **4**, pp. 7125–7130
- [145] Wu, D., Pigou, L., Kindermans, P.J., *et al.*: 'Deep dynamic neural networks for multimodal gesture segmentation and recognition', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2016, **38**, (8), pp. 1583–1597
- [146] Chai, X., Liu, Z., Yin, F., *et al.*: 'Two streams recurrent neural networks for large-scale continuous gesture recognition', Proc. Int. Conf. Pattern Recognition, 2016, pp. 31–36
- [147] Du, Y., Wang, W., Wang, L.: 'Hierarchical recurrent neural network for skeleton based action recognition', Proc. Conf. CVPR, 2015, pp. 1110–1118
- [148] Asadi-Aghbolaghi, M., Clapés, A., Bellantonio, M., *et al.*: 'A survey on deep learning based approaches for action and gesture recognition in image sequences', Proc. Conf. Automatic Face & Gesture Recognition, 2017, pp. 476–483
- [149] Gers, F.A., Schraudolph, N.N., Schmidhuber, J.: 'Learning precise timing with LSTM recurrent networks', *J. Mach. Learn. Res.*, 2003, **3**, pp. 115–143
- [150] Jain, A., Zamir, A.R., Savarese, S.: 'Structural-RNN: Deep learning on spatio-temporal graphs', Proc. Conf. Computer Vision and Pattern Recognition, 2016, pp. 5308–5317
- [151] Donahue, J., Hendricks, L.A., Rohrbach, M., *et al.*: 'Long-term recurrent convolutional networks for visual recognition and description', *IEEE Trans. Pattern Anal. Mach. Intell.*, 2017, **39**, (4), pp. 677–691
- [152] Tsironi, E., Barros, P., Wermter, S.: 'Gesture recognition with a convolutional long short-term memory recurrent neural network', Proc. European Symp. Artificial Neural Network, Computational Intelligence and Machine Learning (ESANN), 2016, pp. 213–218
- [153] Liu, J., Shahroury, A., XuGang Wang, D.: 'Spatio-temporal LSTM with trust gates for 3D human action recognition', Proc. ECCV, 2016, pp. 816–833