



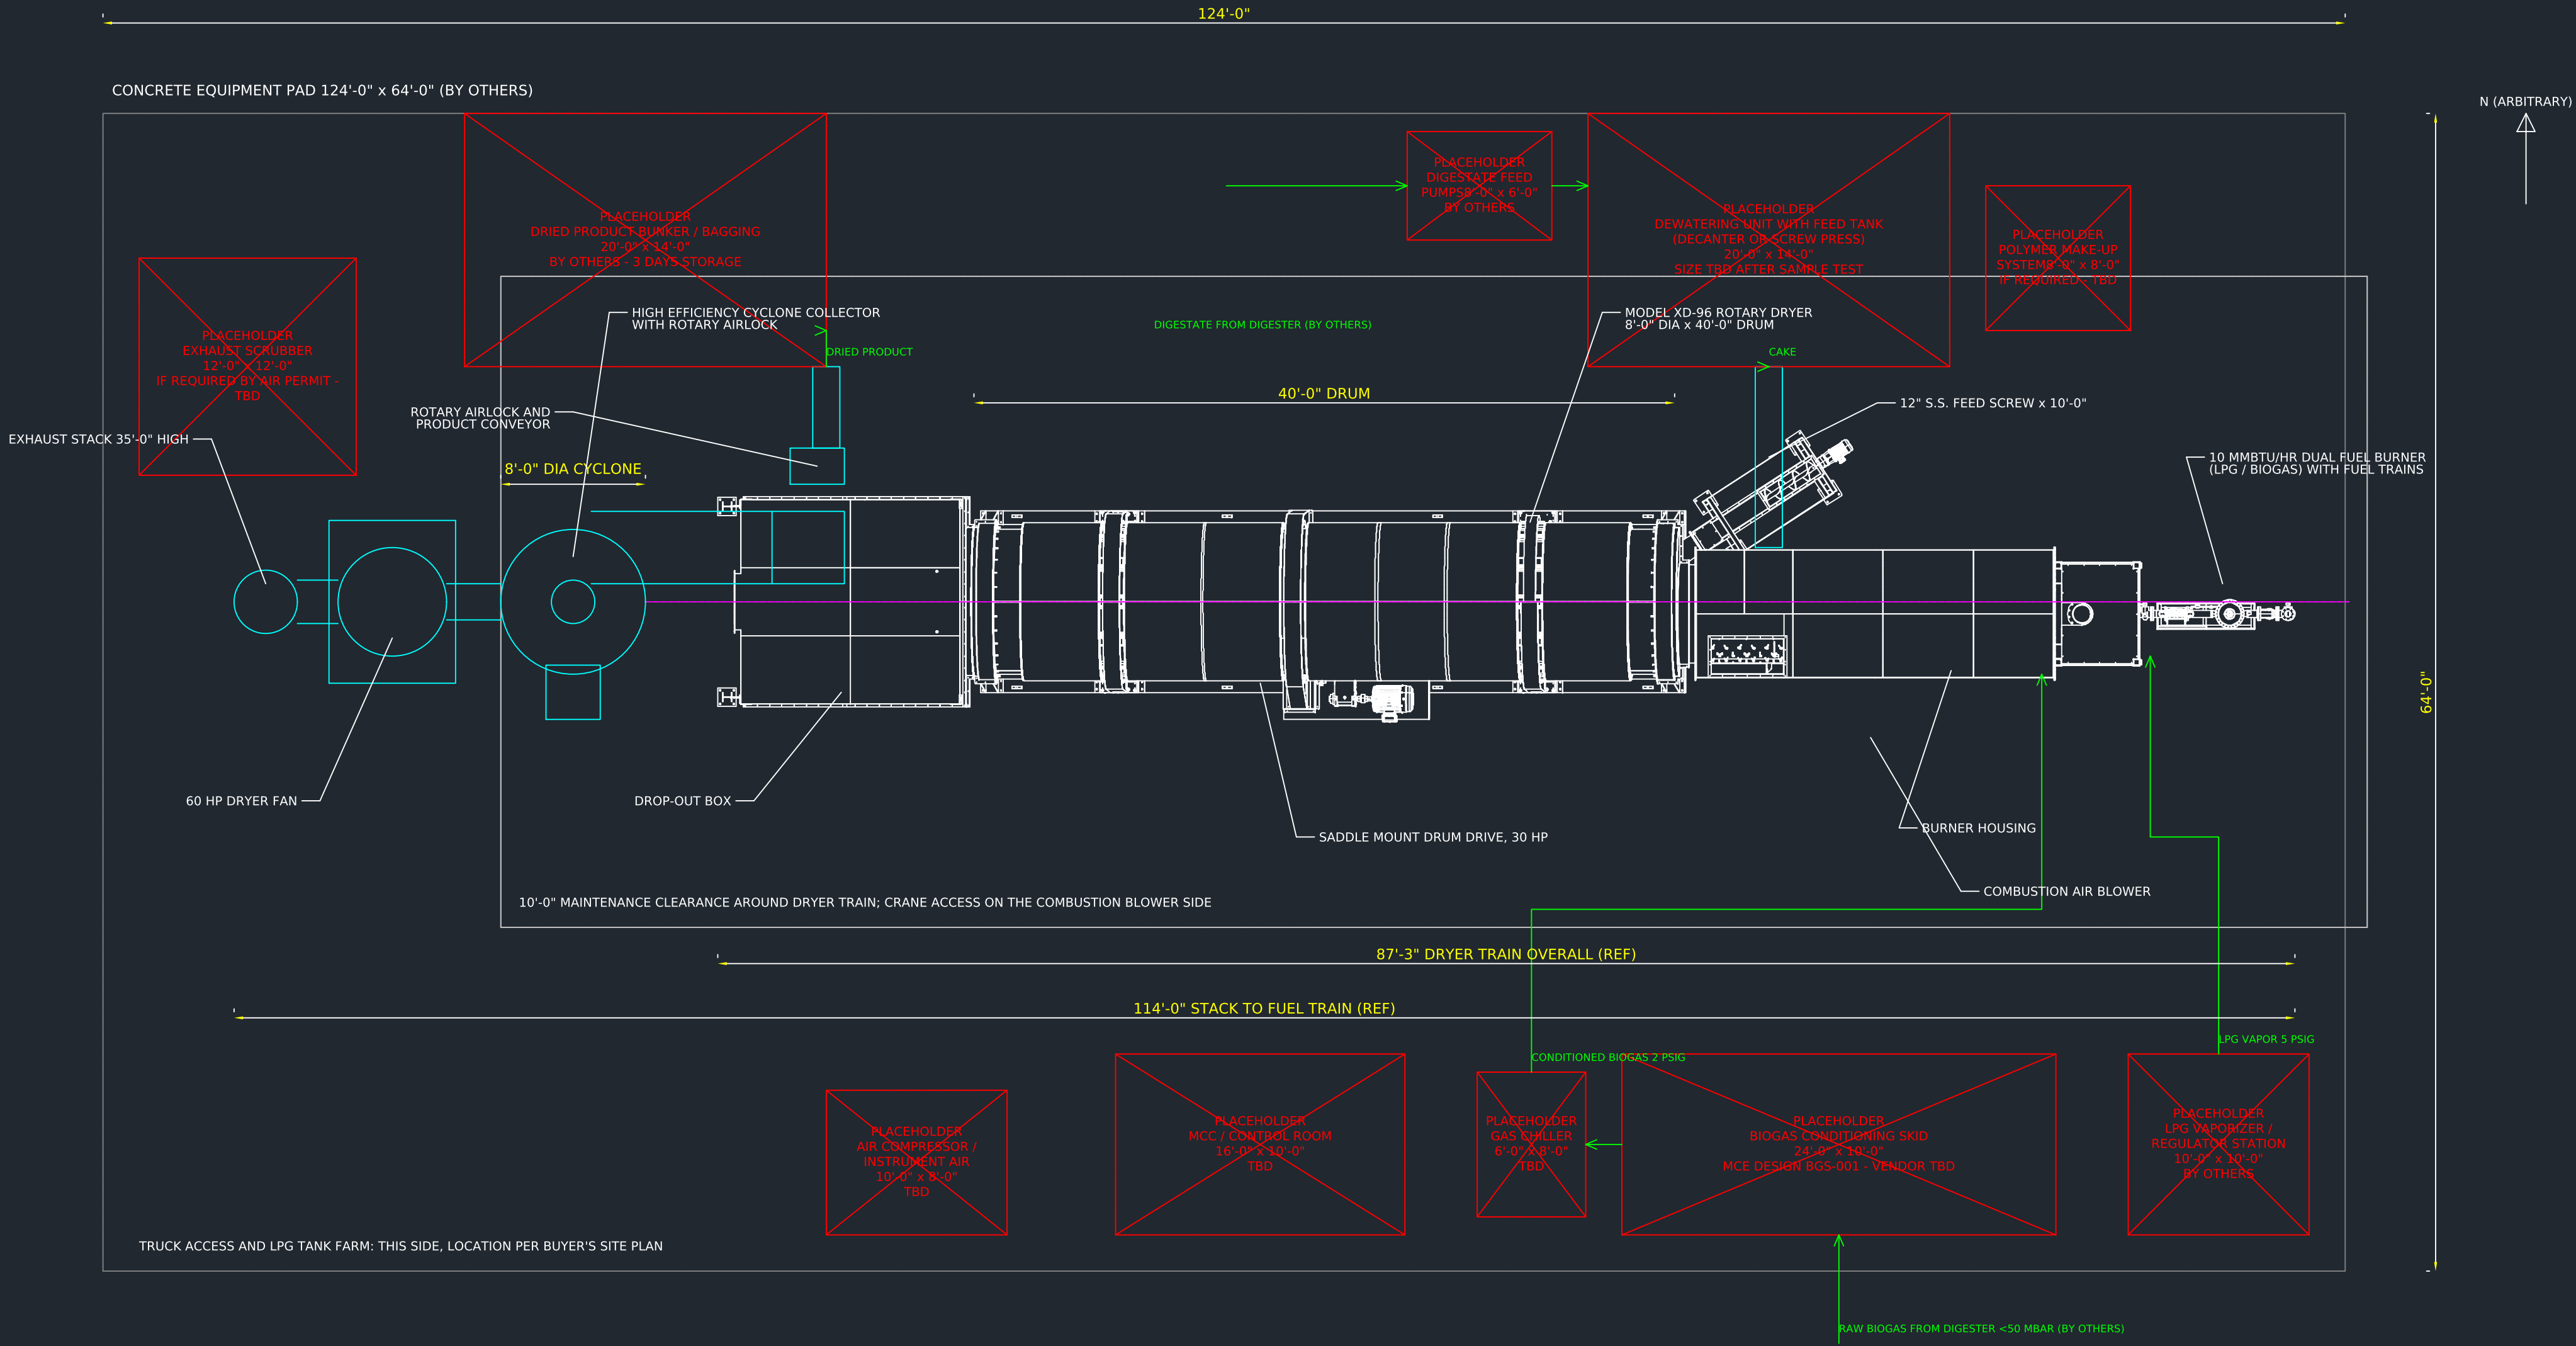


PLAN VIEW - PROPOSED LAYOUT

MODEL XD-96 DRYER SYSTEM - DIMENSIONS IN INCHES, MODEL 1:1

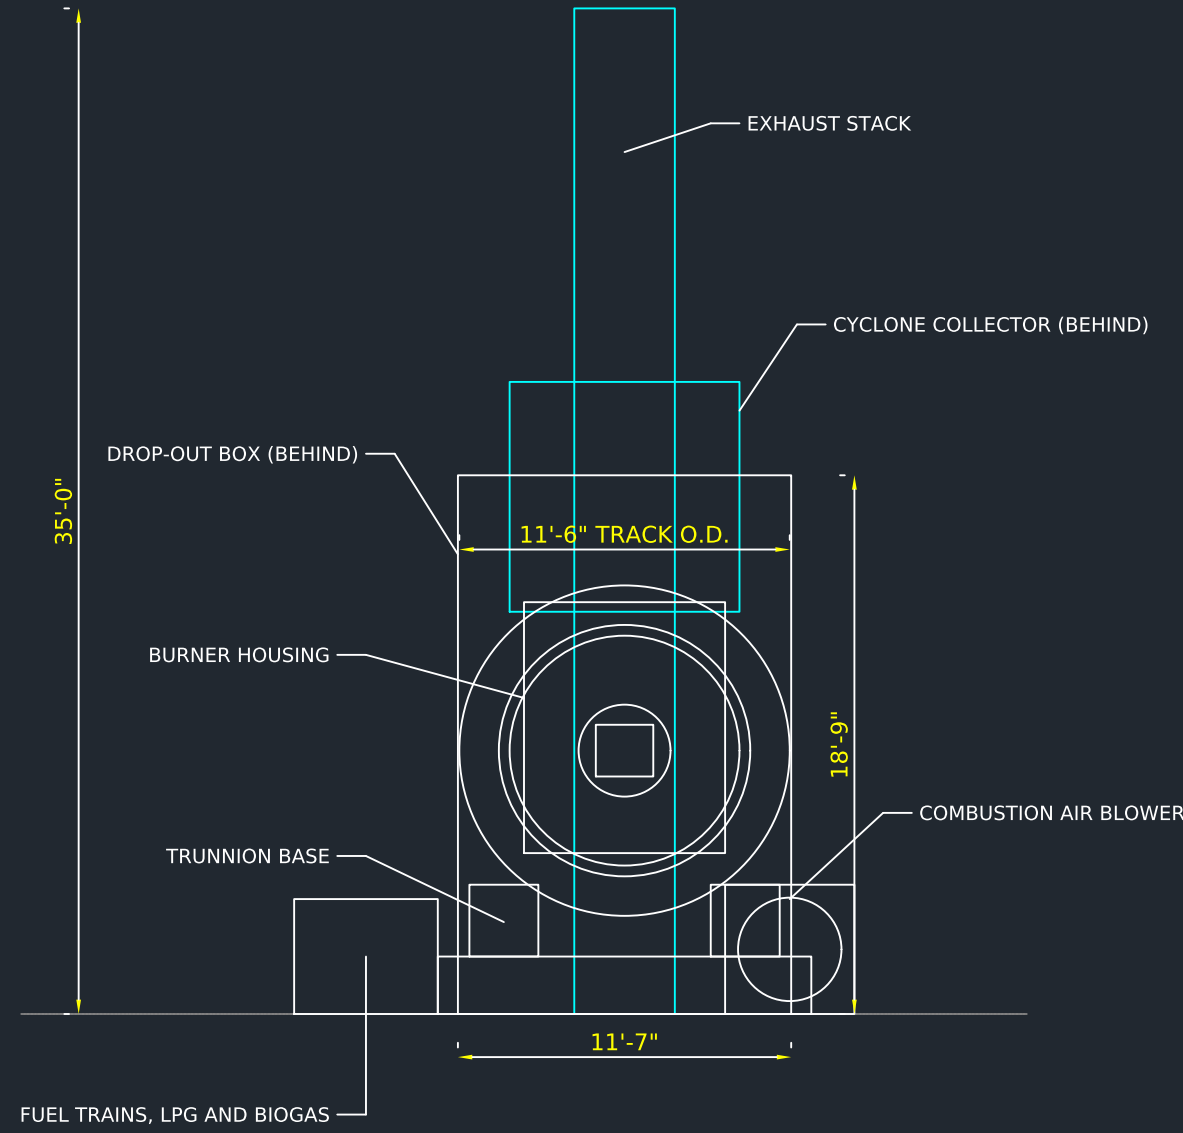

END VIEW

MODEL XD-96 DRYER SYSTEM - FROM THE BURNER END

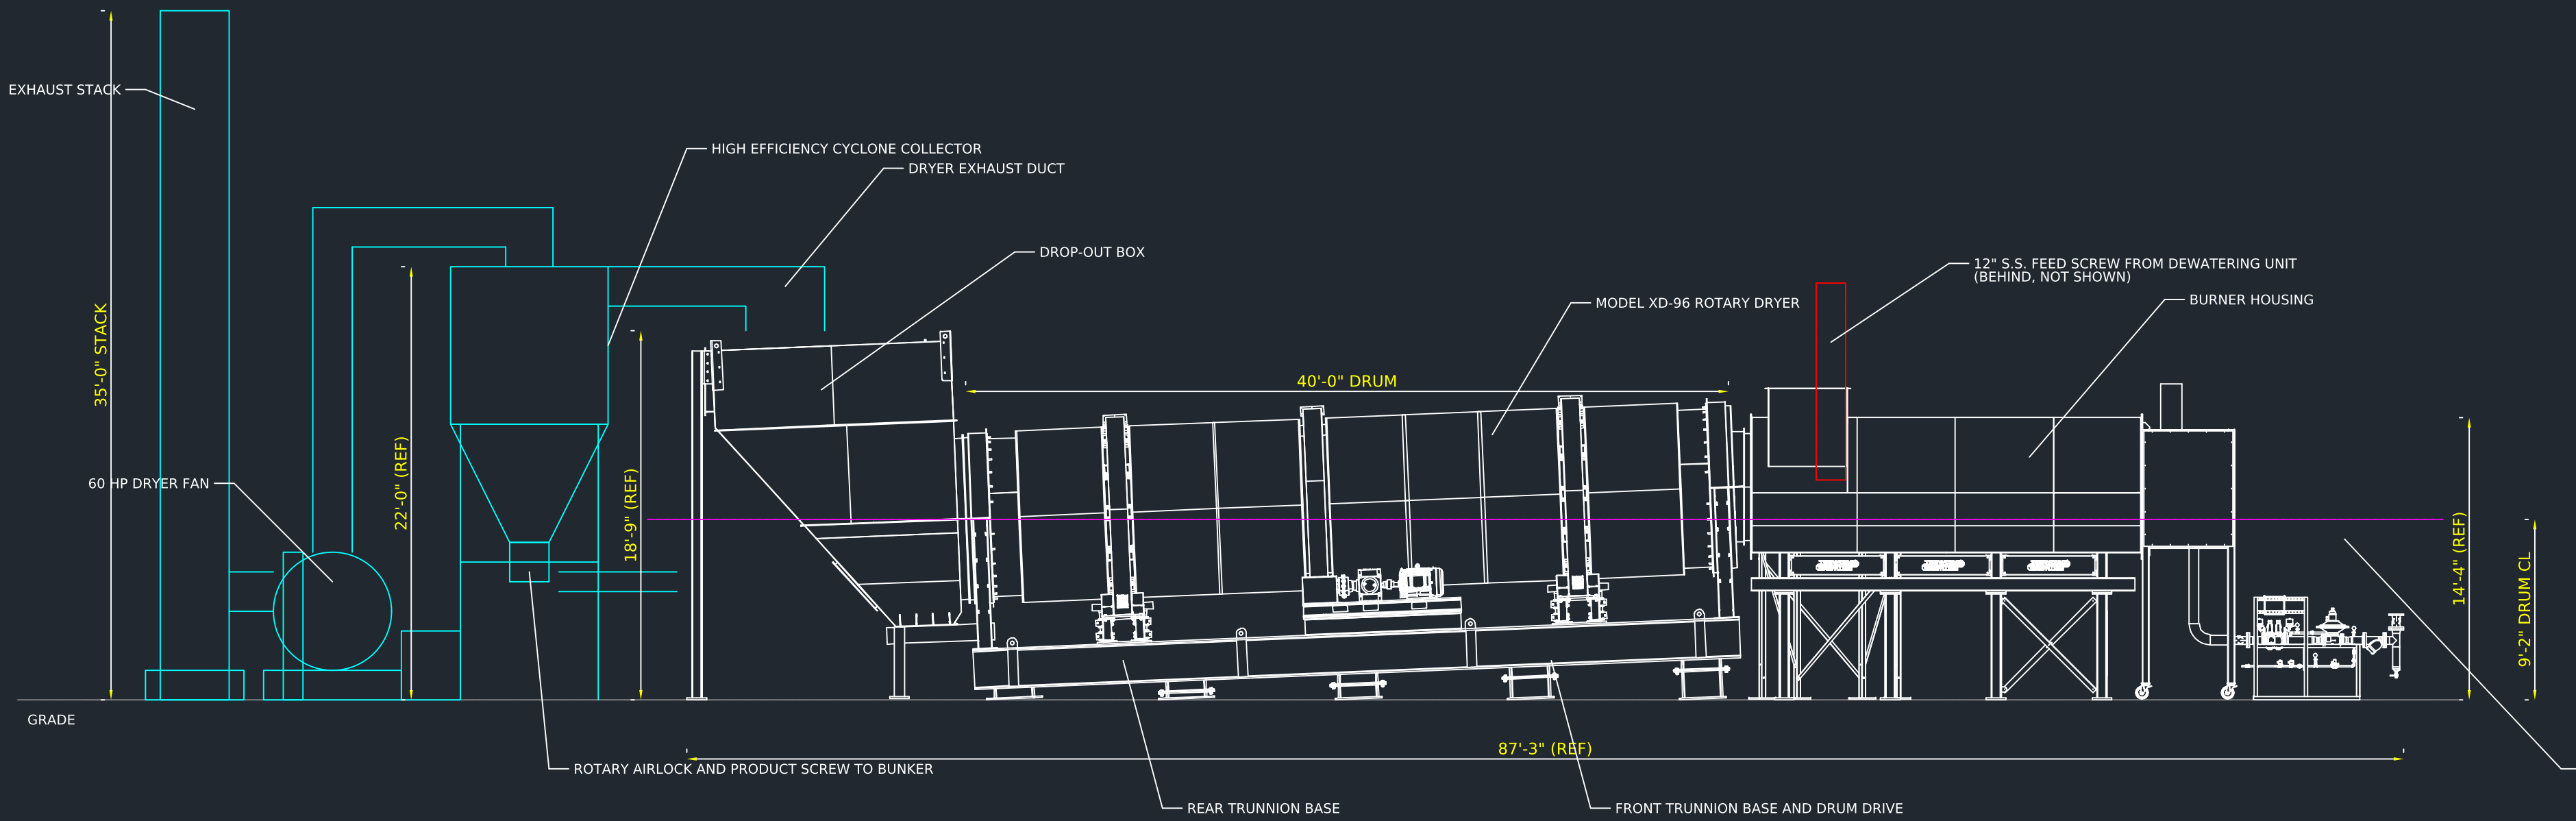

ELEVATION VIEW

MODEL XD-96 DRYER SYSTEM

MIDWEST CUSTOM ENGINEERING, INC. - STUART, FL - USEMCE.COM		
MCE PROPOSED PLANT LAYOUT - PLAN, ELEVATION AND END VIEW		
LETEK DCG / BACHOCO - MODEL XD-96 8'-0" x 40'-0" ROTARY DRYER SYSTEM MERIDA, YUCATAN - PRELIMINARY, FOR SITE PLANNING ONLY PROPRIETARY AND CONFIDENTIAL - PROPERTY OF MIDWEST CUSTOM ENGINEERING, INC. - COPYRIGHT 2026		
DRAWN: MCE DATE: 9/18/2026	UNITS: INCHES SCALE: 1:1 MODEL	DRAWING NO.
DUAL FUEL BURNER AND FUEL TRAINS		SD-26-02 REV P1

GENERAL NOTES

1. PRELIMINARY ARRANGEMENT FOR SITE PLANNING. DRYER TRAIN LINE WORK (LAYER DRYER-TRAIN) IS FROM THE MCE 8x40 DRYER GENERAL ARRANGEMENT AND IS TO SCALE.

2. ITEMS ON LAYER PLACEHOLDER ARE NOT YET DEFINED. THE DASHED, CROSSED RECTANGLES RESERVE SPACE AT THE SIZE SHOWN AND WILL BE REPLACED BY VENDOR BLOCKS WHEN SELECTED.

3. CYCLONE, FAN, STACK, DUCTING, AIRLOCKS AND SCREWS (LAYER EQUIPMENT) ARE SIZED SCHEMATICALLY AND WILL BE DETAILED IN FINAL ENGINEERING.

4. BASIS: 140 MT/DAY DIGESTATE AT 8% TS, DEWATERED TO 2-3.5% TS, DRIED TO 15% MOISTURE, 10 MMBTU/HR DUAL-FUEL BURNER, BIOGAS PRIMARY, LPG STAND-BY.

5. WEIGHTS FOR FOUNDATION DESIGN: DRUM AND SKID 79,900 LB EMPTY + 19,300 LB MATERIAL RUNNING; BURNER ASSEMBLY 16,000 LB; DROP-OUT BOX 9,300 LB.

6. UTILITIES: 480V/3/60 (OR 440V/60), +160 HP CONNECTED. BIOGAS +50 MBAR TO SKID, 2 PSIG TO BURNER; LPG VAPOR 5 PSIG (BY OTHERS); INSTRUMENT AIR 5 SCFM AT 90 PSIG.

7. PAD 124'-0" x 64'-0", ROOF OVER DRYER TRAIN, DEWATERING AND SKID RECOMMENDED. LPG TANKS MIN. 50'-0" FROM THE DRYER. EQUIPMENT CAN BE ROTATED TO SUIT THE SITE.

8. LAYERS: PAD, CLEARANCE, DRYER-TRAIN, EQUIPMENT, PLACEHOLDER, PLACEHOLDER-TEXT, FLOW, DIMENSIONS, TEXT, CENTERLINE, TITLE, NOTES.