

Bin marker dash rows

All three rows are identical

There is nothing to tell them apart, and nothing to bind in settings. A row is credited to whichever bin it appears nearest, because the camera and the bins do not move — which is the whole reason this design has no colour, no rhythm and no code in it.

Mount along the rim, inside

Where a shut drawer hides the row under the counter. Visible means open. Mount it *flat and level*. A row standing on end is still found, but columns are scanned far more coarsely than rows — that asymmetry is what buys the thin flat row — so an upright row has to be several times broader.

Height is a setting, and it costs dashes

Settings → Marker Strips → Row height. *Tall* wants about 15 mm of printed height and opens on 5 dashes; *Thin* about 7.5 mm and 6 dashes; *Hairline* about 3.8 mm and 7. Each step down scans more lines, which gives the room more chances to produce something row-shaped, and a longer printed row is what pays that back. All three were measured clean on the site's own frames.

The threshold is dashes, not blur

A drawer reveals the row a dash at a time as it slides out from under the edge. Five dashes clear of it is what makes the bin read open — a legible rule rather than a threshold on a blur. To trigger sooner, print the dashes **smaller**, not fewer: six at a 4 mm pitch clear the edge in half the travel that six at 8 mm need. Fewer is not a setting — below the profile's count the room itself starts producing rows.

Which size to print

Start large and work down. The debug overlay reports the dash count, the pitch in samples, and how many scan lines crossed the row. Dashes hold up down to two samples of pitch, and this style reads the full luma frame rather than the half-size chroma grid the colour styles need — which is worth exactly double the distance. Height is set by the profile above.


An arm across it costs nothing

Repetition is the design. Covering the middle of the row leaves two shorter rows, and the longer one still answers — so print more dashes than the threshold needs.

Dash row — 3 mm dashes


20 dashes, 123 mm long, 22 mm tall. Reads once six dashes are clear of the counter edge on the default *Thin* setting — about 33 mm of travel. Print at 100%, matte stock.

BIN 1

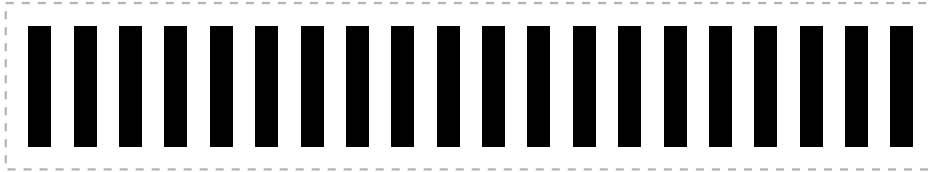


Bin: _____

BIN 2

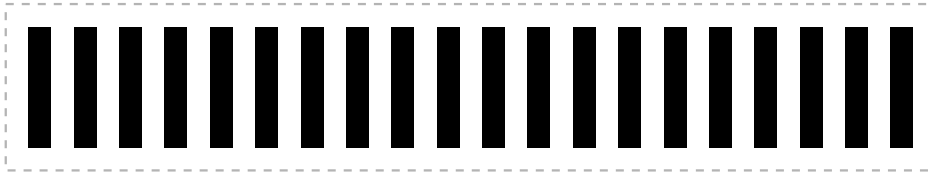

Bin: _____

BIN 3

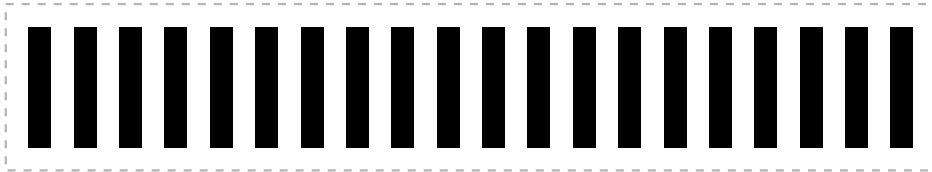

Bin: _____

Dash row — 4 mm dashes

18 dashes, 148 mm long, 22 mm tall. Reads once six dashes are clear of the counter edge on the default *Thin* setting — about 44 mm of travel. Print at 100%, matte stock.

BIN 1



Bin: _____

BIN 2



Bin: _____

BIN 3




Bin: _____

Dash row — 6 mm dashes


14 dashes, 174 mm long, 22 mm tall. Reads once six dashes are clear of the counter edge on the default *Thin* setting — about 66 mm of travel. Print at 100%, matte stock.

BIN 1

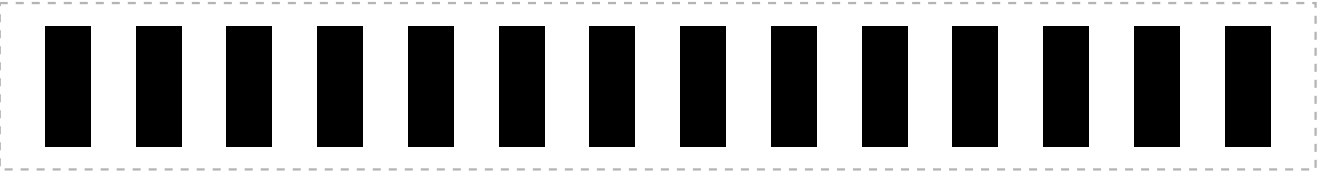


Bin: _____

BIN 2

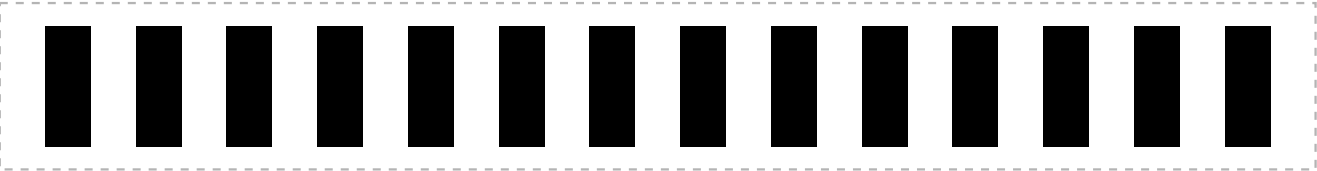

Bin: _____

BIN 3

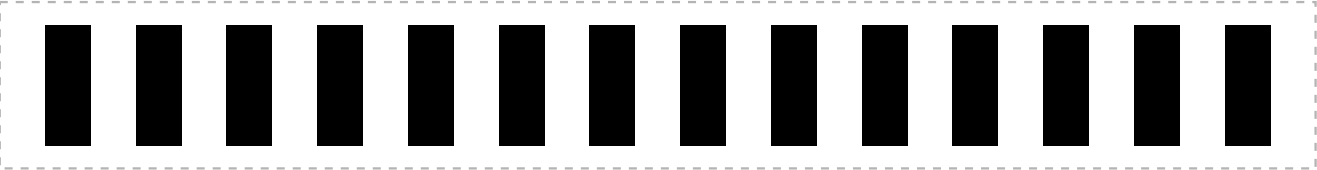


Bin: _____

Dash row — 8 mm dashes


12 dashes, 200 mm long, 22 mm tall. Reads once six dashes are clear of the counter edge on the default *Thin* setting — about 88 mm of travel. Print at 100%, matte stock.

BIN 1

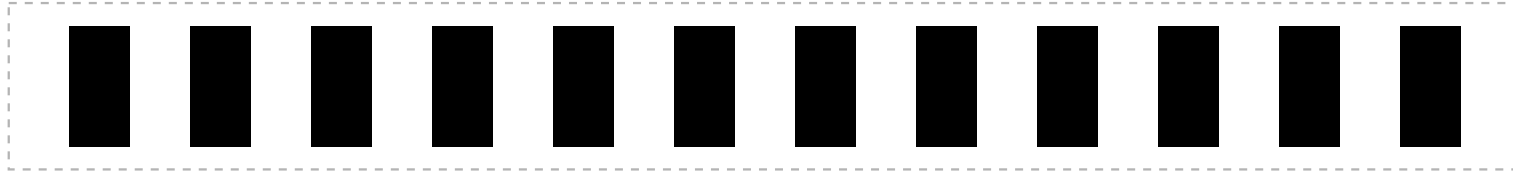


Bin: _____

BIN 2

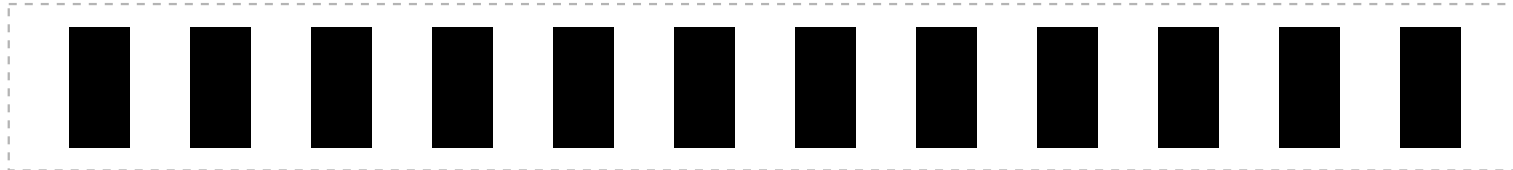

Bin: _____

BIN 3

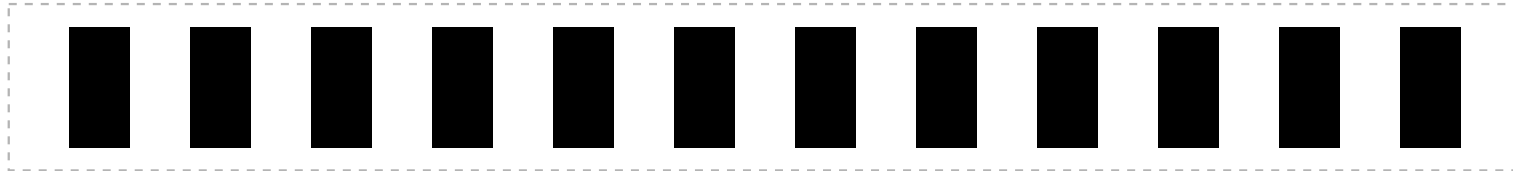


Bin: _____

Dash row — 12 mm dashes


9 dashes, 228 mm long, 22 mm tall. Reads once six dashes are clear of the counter edge on the default *Thin* setting — about 132 mm of travel. Print at 100%, matte stock.

BIN 1

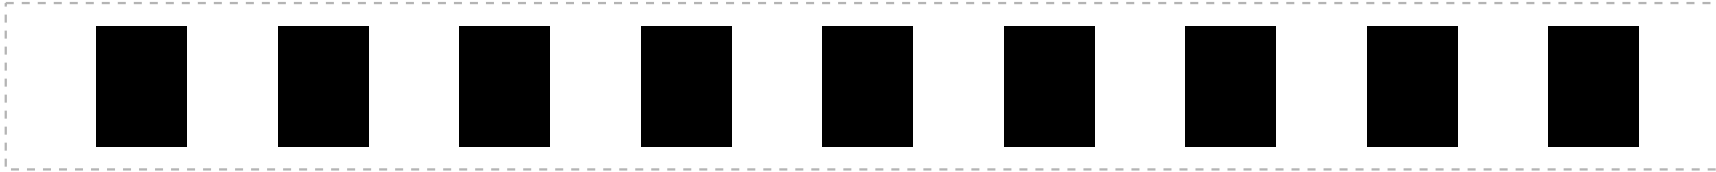


Bin: _____

BIN 2

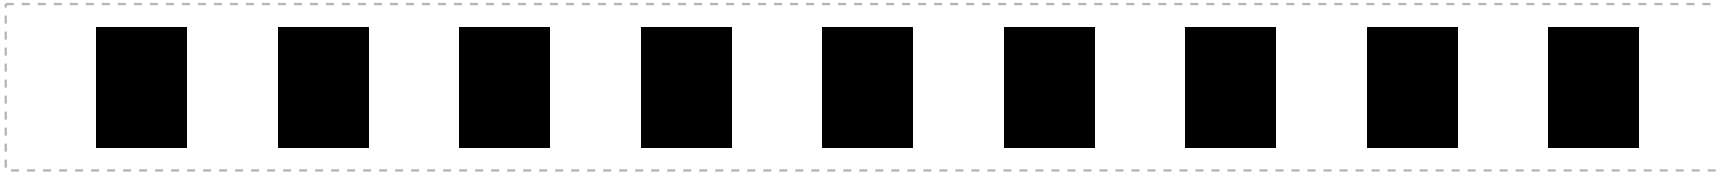

Bin: _____

BIN 3

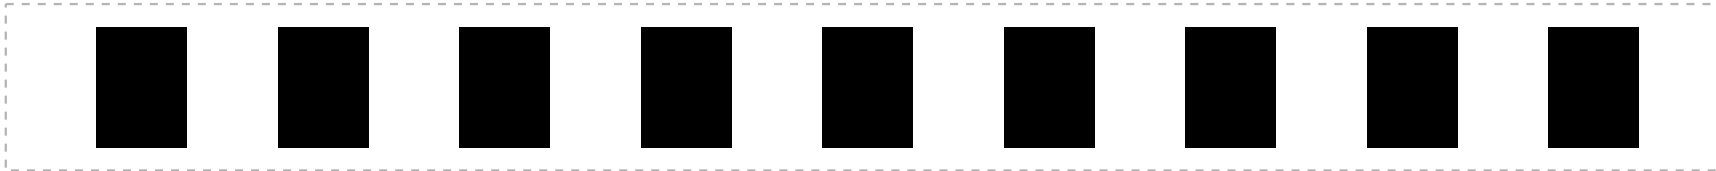

Bin: _____