

REPEAT LOG 1:200 SCALE (SANDSTONE MATRIX)

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Wed Oct 25 22:49:47 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabari_D3/177102.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2380.755 m BOTTOM DEPTH: 2512.428 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
X AXIS CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"
ZDL	FILTER ()	medium (1)		"	"
DT24	FILTER ()	light (2)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	9.625	in	TOP	BOTTOM
	CASING THICKNESS	0.000	in	"	"
BIT SIZE	BIT SIZE	12.250	in	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (zdbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	12.250	in	"	"
	FIXED DIAMETER (mbh*)	12.250	in	"	"
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		"	"
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
	MUD REFERENCE TEMP	75.0	degF	"	"
	TEMP GRADIENT	1.200	0.01 degF/ft	"	"

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY	0	ppm	"	"
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		"	"
	BIT SIZE BEHIND CSNG	7.875	in	"	"

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
ZDL CHI-SMOOTH FILTER	DEN CHISM	ON		TOP	BOTTOM
	PE CHISM	ON		"	"
MUD DENSITY	RHOmud	10.100	lbm/gal	"	"
ZDL	ZDL TRACKING	ON		"	"

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
------------------	-----------	-------	-------	--------------	--

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24	TOP	BOTTOM
ACOUSTIC PICK CONTROL				
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP
	REJECTION DTmax	180	us/ft	BOTTOM
FIRST ARRIVAL PICK	SEARCH START OFFSET {sfa1*}	87	us	''
	SEARCH START OFFSET {sfa2*}	87	us	''
	SEARCH START OFFSET {sfa3*}	87	us	''
	SEARCH START OFFSET {sfa4*}	87	us	''
	SEARCH WINDOW LENGTH	1045	us	''
	THRESHOLD FACTOR	0.30		''
	THRESHOLD MINIMUM {sfa1*}	1.8	pct	''
	THRESHOLD MINIMUM {sfa2*}	1.8	pct	''
	THRESHOLD MINIMUM {sfa3*}	1.8	pct	''
	THRESHOLD MINIMUM {sfa4*}	1.8	pct	''
	E3 THRESHOLD	OFF		''

ACOUSTIC QUALITY CONTROL				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP
				BOTTOM

ACOUSTIC WAVEFORM FILTER				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP
	LOW FREQ CUTOFF	4000	Hz	BOTTOM
	HIGH FREQ CUTOFF	20000	Hz	''


HDIL PROCESSING				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		BOTTOM
	ABC to CALCULATE	STANDOFF		''
	STANDOFF	1.50	In	''
	TOOL POSITION	ECCENTERED		''
	Rmud MULTIPLIER	1.000		''



CURVE DESCRIPTION REPORT			
CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CALX	CAL	Oct 25 22:21:58 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 22:21:58 2006	CABLE HEAD TENSION
F1:CNC	CNC	Oct 25 22:21:58 2006	BOREHOLE SIZE CORRECTED COMPENSATED NEUTRON POROSITY
F1:GR	GR	Oct 25 22:21:58 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:PE	PE	Oct 25 22:21:58 2006	PHOTO ELECTRIC CROSS-SECTION
F1:SPD	SPD	Oct 25 22:21:58 2006	SPEED
F1:TEN	TEN	Oct 25 22:21:58 2006	TOTAL TENSION
F1:ZCOR	ZCOR	Oct 25 22:21:58 2006	DENSITY CORRECTION
F1:ZDNC	ZDNC	Oct 25 22:21:58 2006	BOREHOLE SIZE/MUD WEIGHT CORRECTED DENSITY


CURVE MEASURE POINT OFFSET					
CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CALX	26.37	M2R1	2.44	M2R9	2.44
CHT	0.00	M2R2	2.44	M2RX	2.44
CNC	31.70	M2R3	2.44	PE	26.37
GR	33.83	M2R6	2.44	SPD	0.00
				TEN	0.00
				ZCOR	26.37
				ZDNC	26.37

Presentation	: sys1:/dat1a/peak/bilabari_D3/quick_rpt_200.pdf [1:200 Scale]
Plot Interval	: 2347.26 - 2512.47 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabari_D3/i777j02.off

Created On : Oct 25 22:21:58 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2343.23 - 2512.47 Meters
Oct : [777]

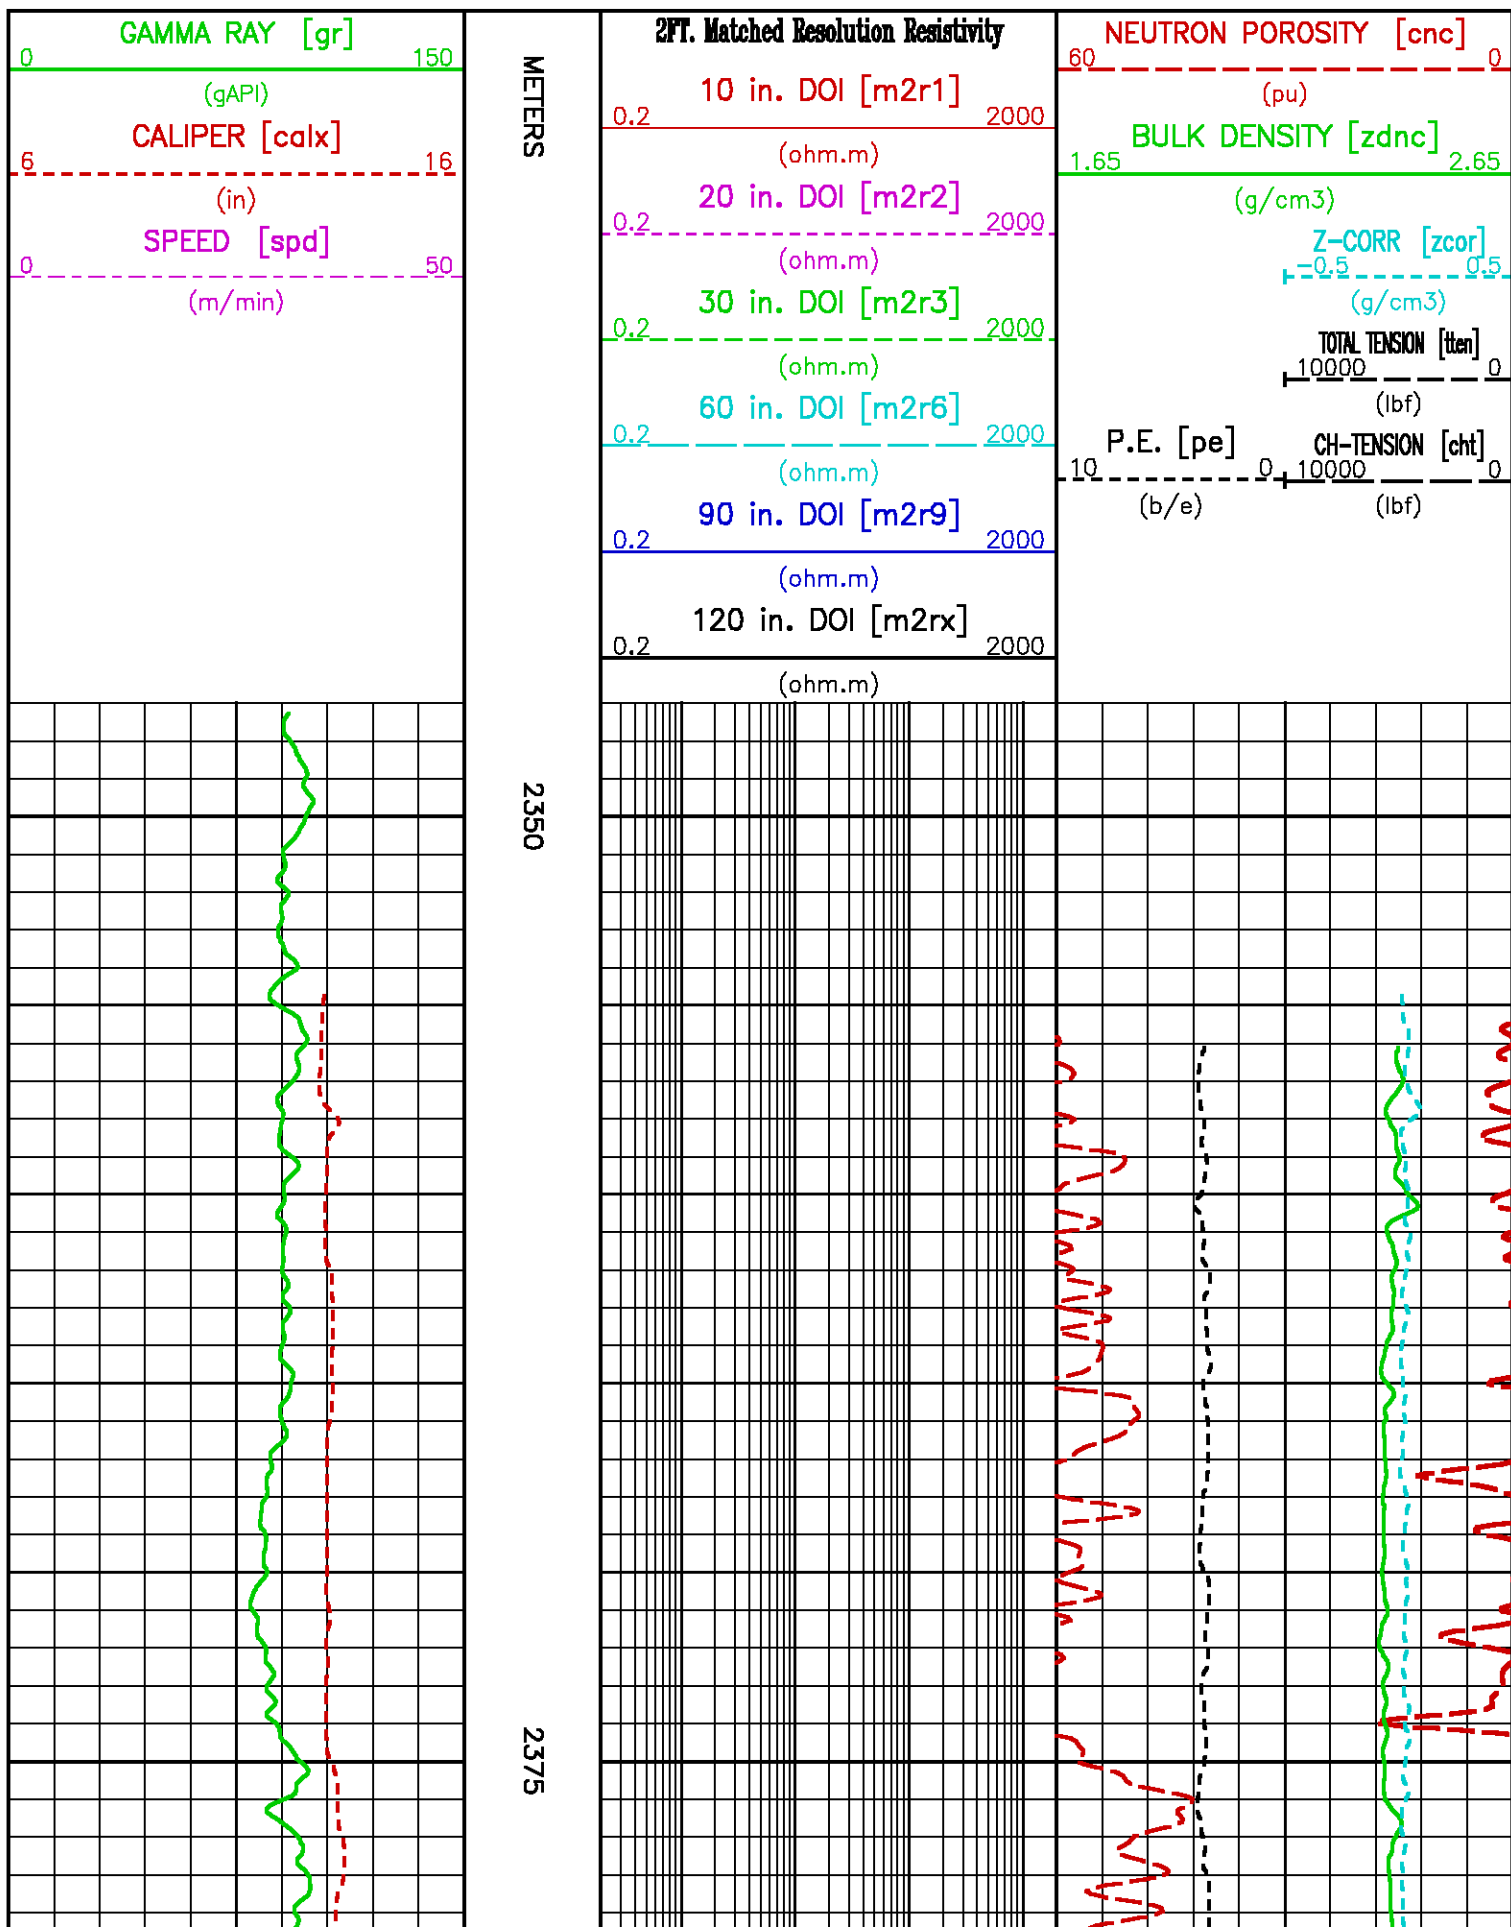

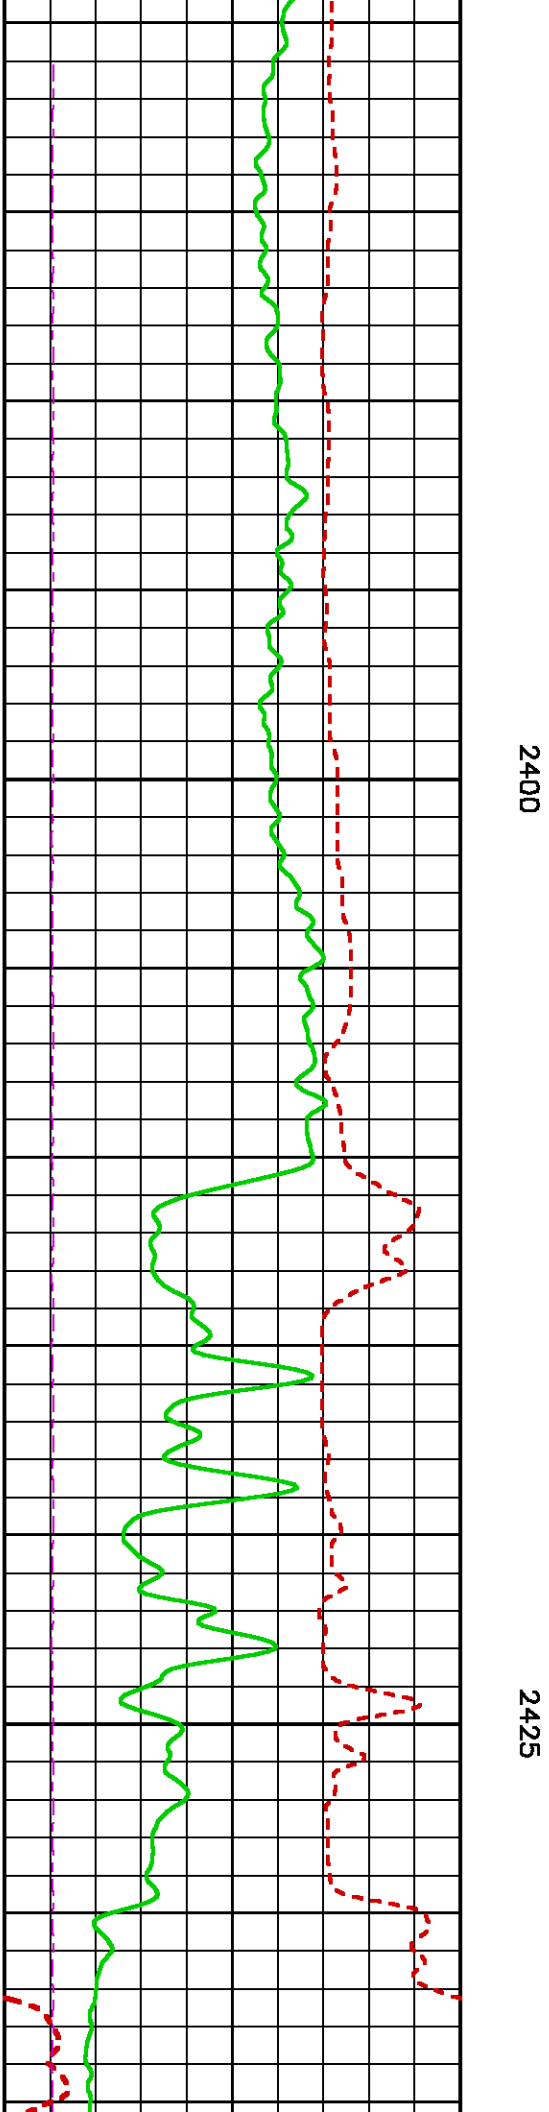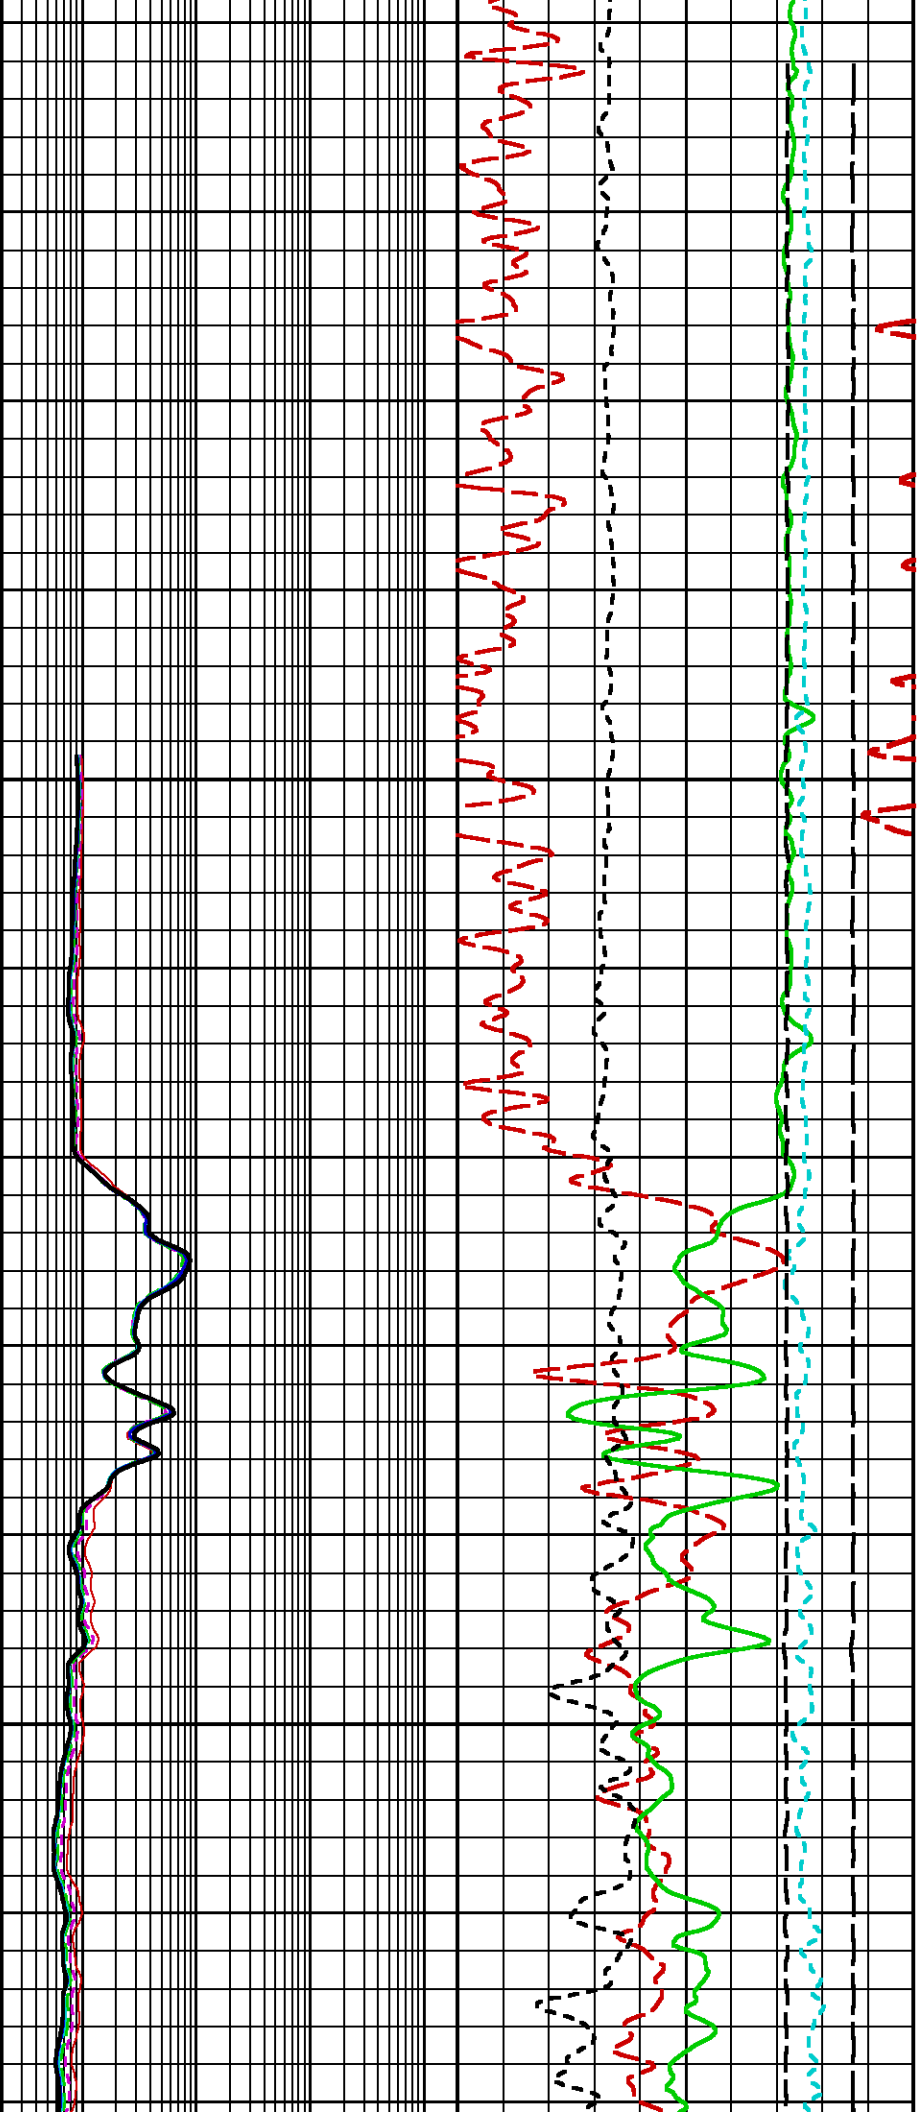

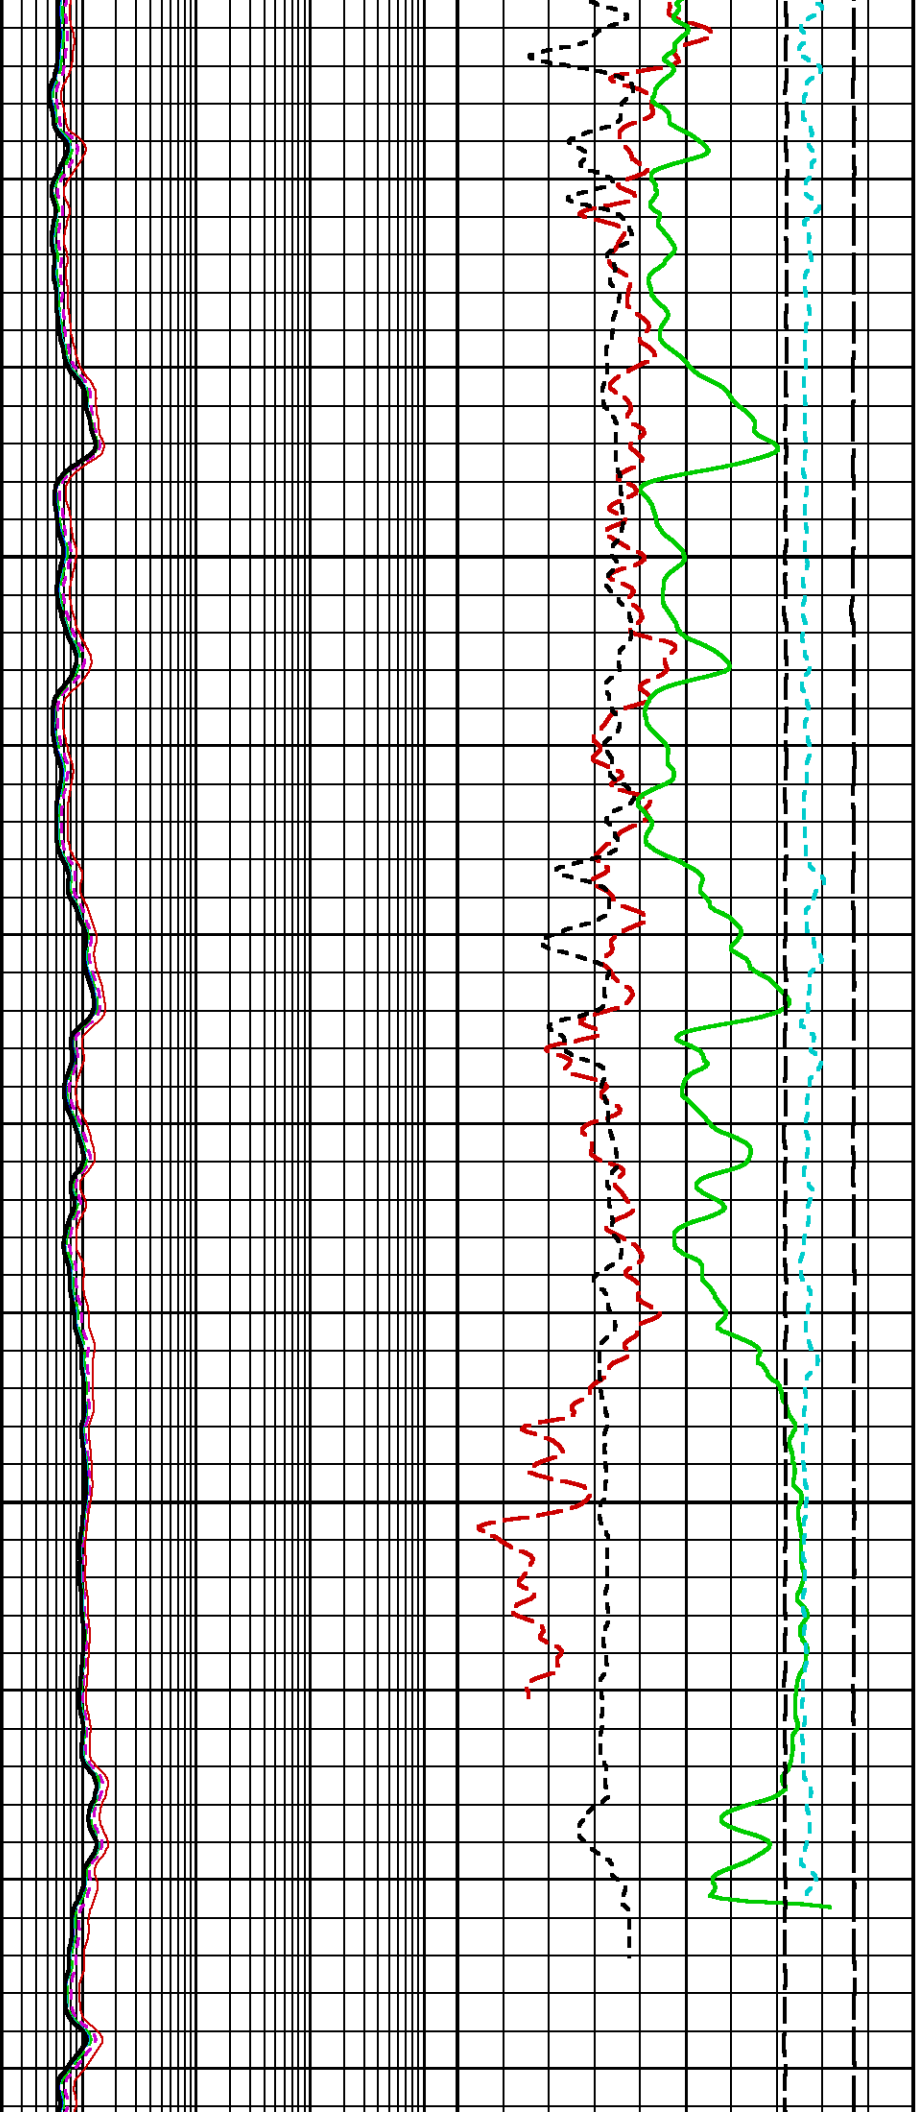

2450

2475

