Unit Gesture

SKU:U127













Description

Unit Gesture is a **3D gesture recognition** sensor using the **I2C communication** interface. It adopts the **PAJ7620U2** sensor solution, with the program by default supporting **9 types of gesture recognition**. The maximum gesture update frequency can reach **240Hz**, and it has a certain level of **ambient light interference resistance**. It supports custom unit sampling time and can add recognition gesture combinations through program algorithms as needed. The sensor features **strong stability**, **fast recognition speed**, **high accuracy**, and **low power consumption** (operating current only 2.2mA), making it suitable for various applications such as **non-contact remote controls**, **robot interaction**, **human-computer interaction games**, and **gesture light control**.

- **Supports 9 gestures:**
  - **Up**, **Down**, **Left**, **Right**, **Forward**, **Backward**, **Clockwise**, **Counterclockwise**, **Wave**

Features

- PAJ7620U2 gesture sensor / I2C interface
- 9 recognizable gestures
- Fast recognition speed, high accuracy, strong interactivity
- Supports custom addition of recognition gesture combinations (requires secondary software development)
- Effective recognition distance: 5cm-15cm
- Built-in infrared LED and optical components, with ambient light immunity
- Development platforms: Arduino, UIFlow

Includes

- 1 x Unit Gesture
- 1 x HY2.0-4P Grove cable (20cm)


Applications

- Non-contact remote controls
- Robot interaction
- Human-computer interaction games
- Gesture light control

Specifications

Specification	Parameter
Communication Interface	I2C @0x73
Gesture Frequency	Typical: 120Hz, Max: 240Hz
Supported Gestures	9 built-in + support for software algorithm expansion
Effective Recognition Distance	5cm-15cm
Ambient Light Immunity	<100k Lux
Communication Interface	I2C, addr: 0x73
Operating Current	2.2mA
Product Size	32.0 x 24.0 x 8.0mm
Product Weight	4.6g
Package Size	138.0 x 93.0 x 9.0mm
Gross Weight	10.0g

Schematics

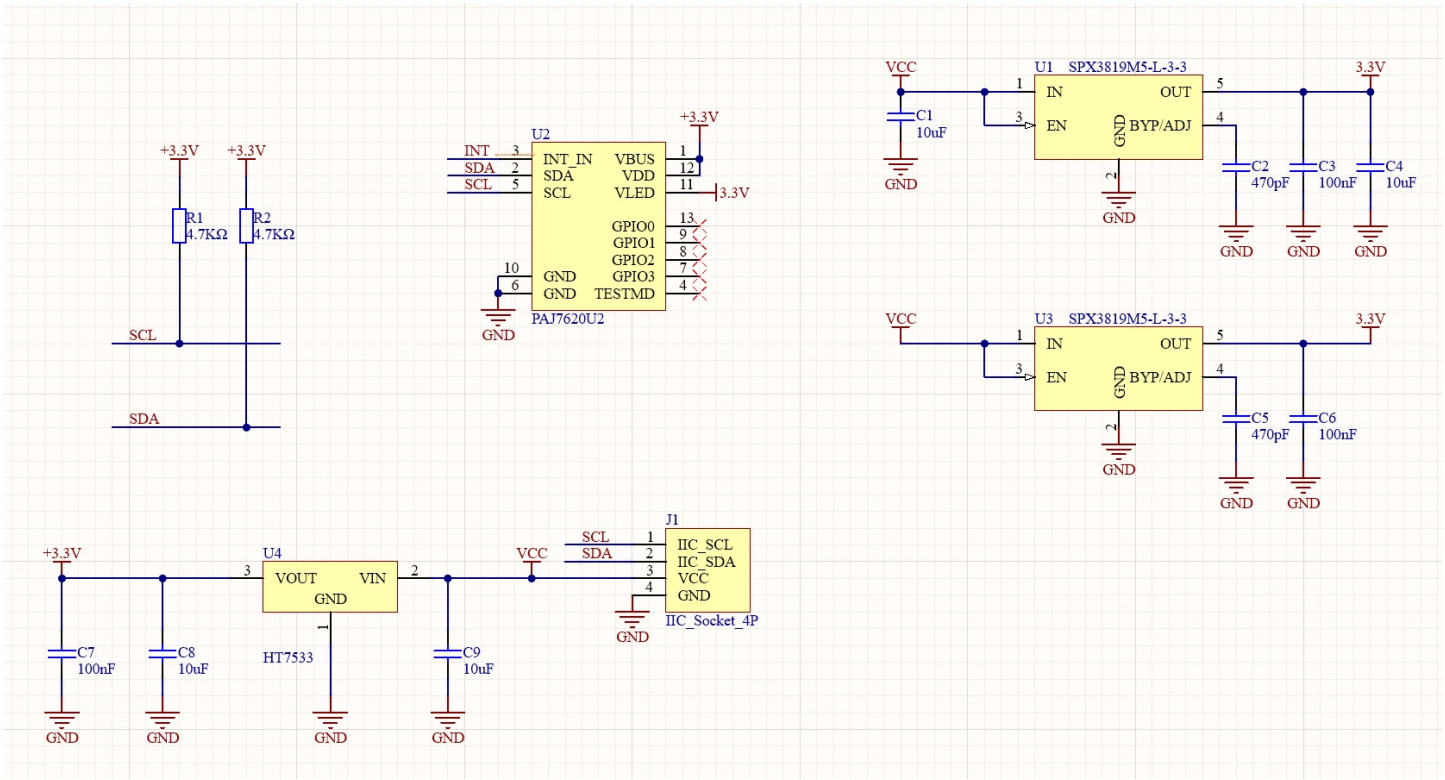


PinMap

Unit Gesture

HY2.0-4P	Black	Red	Yellow	White
PORT.A	GND	5V	SDA	SCL

Model Size

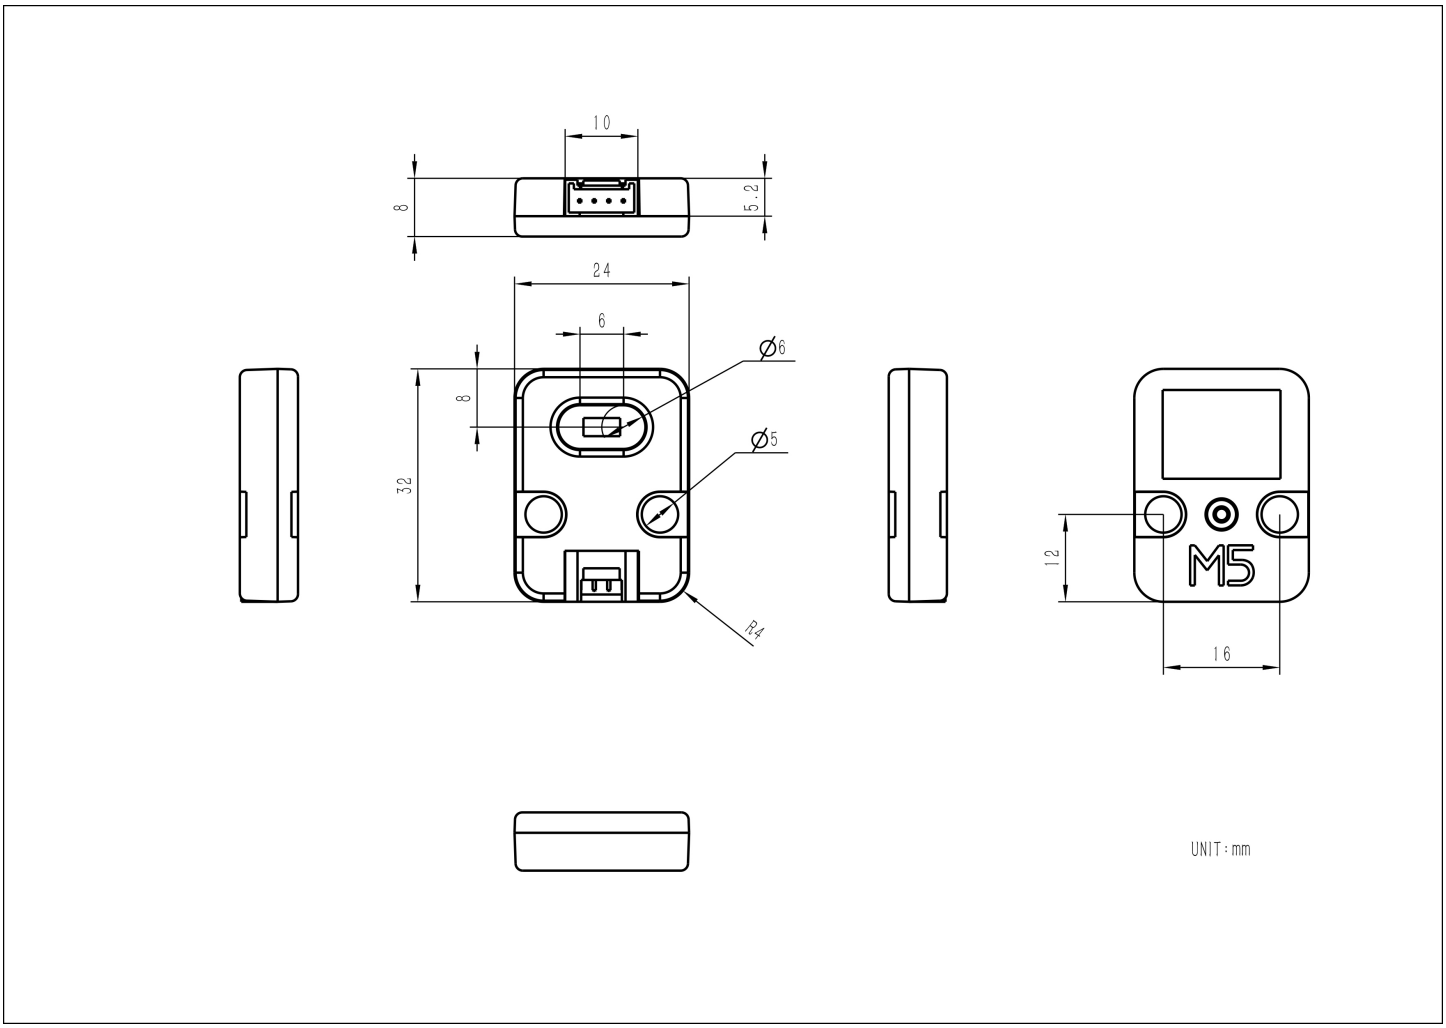

Structure

- Unit Gesture Structure Files

Datasheets

- PAJ7620U2 Datasheet

Softwares

Arduino

- Unit Gesture Test Example with M5Core

UiFlow1

- Unit Gesture UiFlow1 Docs

EasyLoader

Easyloader	Download Link	Note
Unit Gesture Test Easyloader	download	/

Video

- Unit Gesture Case Demonstration

GESTURE_UNIT_VIDEO.mp4