Unit Joystick v1.1

SKU:U024-C











Description

Unit Joystick v1.1 is a joystick control input unit that adopts the I2C communication interface, supporting three-axis control signal inputs (X/Y axis offset analog inputs, Z axis button digital input). It is suitable for applications such as gaming and robot control.

Features

- Three-axis input:
  - X/Y axis offset analog inputs
  - Z axis button digital input
- 2 x LEGO compatible holes
- Development Platform: Arduino, UIFlow (Blockly, Python)

Includes

- 1 x Unit Joystick v1.1
- 1 x HY2.0-4P Grove Cable (20cm)

Applications


- Game controller
- Robot remote control

Specifications

Specification	Parameter
Main MCU	MEGA8A
Communication Interface	I2C Communication @0x52
X/Y axis output	0-255
Z axis button output	0/1
Product Size	48.0 x 24.0 x 32.0mm
Product Weight	11.0g
Package Size	138.0 x 93.0 x 25.0mm
Gross Weight	27.0g

Schematics

- Unit Joystick v1.1 Schematics PDF

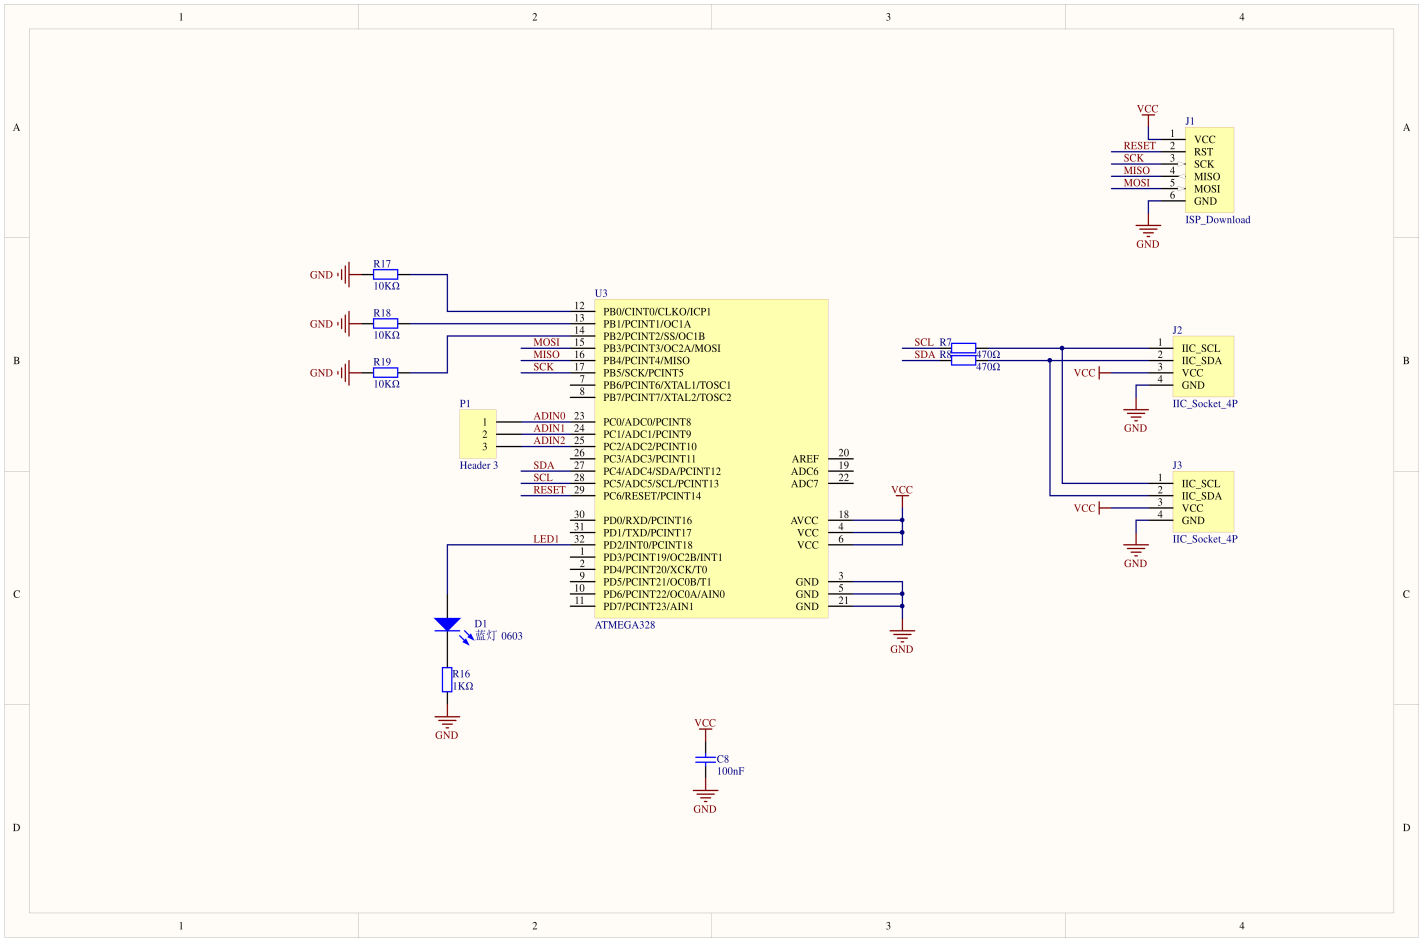


PinMap

Unit Joystick v1.1

HY2.0-4P	Black	Red	Yellow	White
PORT.A	GND	5V	SDA	SCL

Model Size

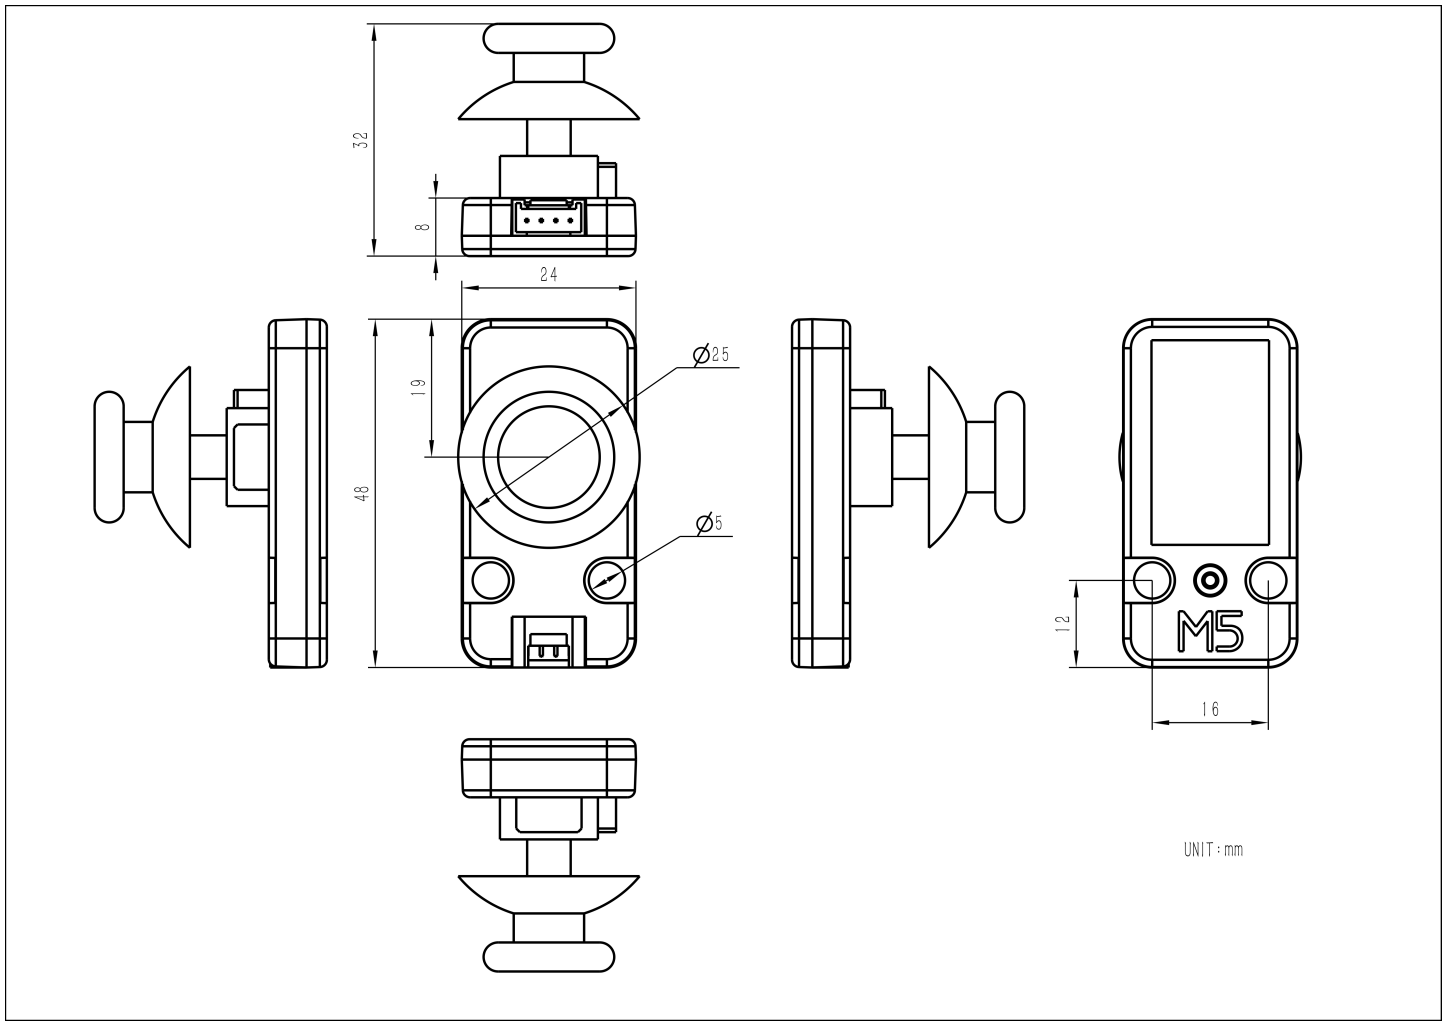

Structure

- Unit Joystick v1.1 Structure Files

Softwares

Arduino

- Unit Joystick v1.1 Get Value Example



UiFlow1

- Unit Joystick v1.1 UiFlow1 Docs

UiFlow2

- Unit Joystick v1.1 UiFlow2 Docs

Protocol

- Protocol type: I2C
- I2C Address: **0x52**

> JOYSTICK REG 0x52

REG	len	description	return values
0x52	3	Read joystick status	[0] X VALUE [1] Y VALUE [2] BTN STATUS

EasyLoader

Easyloader	Download Link	Notes
Unit Joystick v1.1 Test Easyloader	download	/

Video

- Display joystick XY data and button status.

Joystick_UNIT.mp4

- UiFlow2 Joystick Unit