


Stamp-S3 BreakOut


SKU:A129




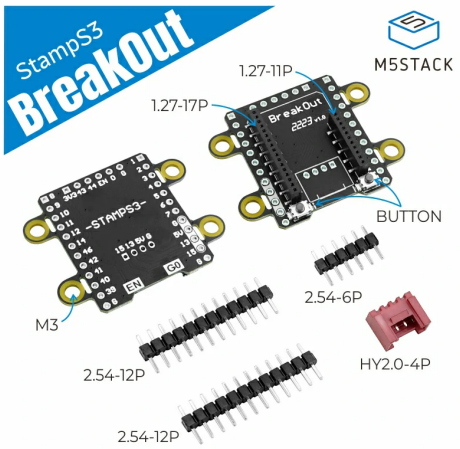


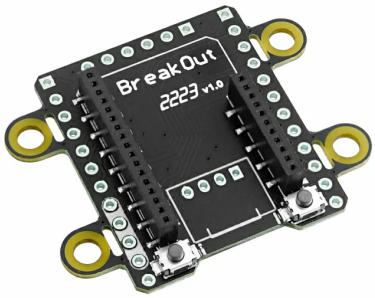


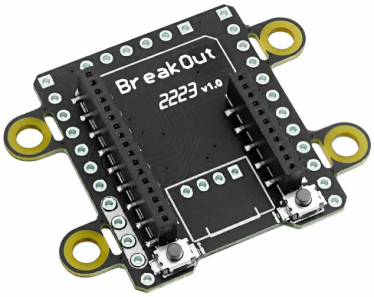


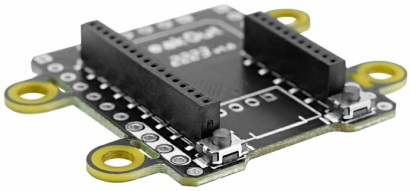

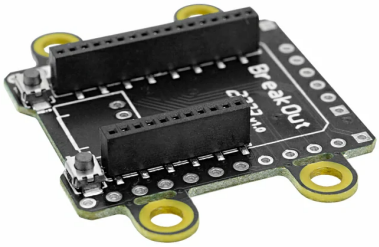





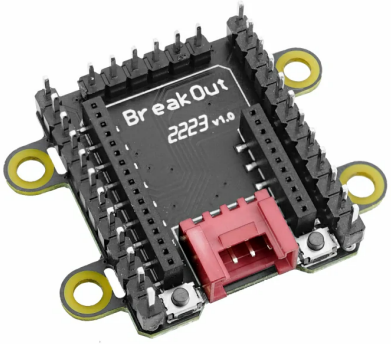



Description

The **Stamp-S3 BreakOut** board is specifically designed for the Stamp-S3. It converts the 1.27mm pitch pins of the Stamp-S3 to a standard 2.54mm pitch, making it easier to connect with other devices. Additionally, the board provides a 2.0mm pitch 4pin **Grove port**, allowing for easy connection with other M5Stack Unit expansions. Two **tactile switches** are connected to the G0 and EN pins for power and reset control, respectively. Pre-drilled mounting holes are provided for easy installation. This board is suitable for prototyping, M5Stack project expansion, and embedded system development.

Features

- Pin Conversion: Converts the 1.27mm pitch pins of the Stamp-S3 to a standard 2.54mm pitch for easy connection with other devices.
- Expansion Interface: Provides a 2.0mm 4pin Grove port for easy connection with other M5 Units modules.
- Control Functionality: Two tactile switches for power and reset control, adding flexibility.
- Easy Installation: Pre-drilled mounting holes for easy installation, suitable for various application scenarios.
- High Expandability: Offers options for functional expansion and flexibility.
- Compatibility: Compatible with the M5Stack ecosystem, allowing seamless integration with other M5 devices.

Includes

- 1 x Stamp-S3 BreakOut
- 2 x 2.54-12P Pin Headers
- 1 x 2.54-6P Pin Header
- 1 x HY2.0-4P Socket

Applications


- Prototyping
- M5Stack Project Expansion
- Embedded System Development

Specifications


Specification	Parameter
IO Interface x23	G0/G1/G2/G3/G4/G5/G6/G7/G8/G9/G10/G11/G12/G13/G14/G15/G39/G40/G41/G42/G43/G44/G46
Interface Type	2.54mm Pin Header / 2.0mm Grove Interface
Buttons	G0 and EN
Mounting Hole Diameter	3mm
Product Size	38 x 30.54 x 6mm
Package Size	136 x 92 x 13mm
Product Weight	2.7g
Gross Weight	6.6g

Schematics

- Stamp-S3 BreakOut Schematics PDF

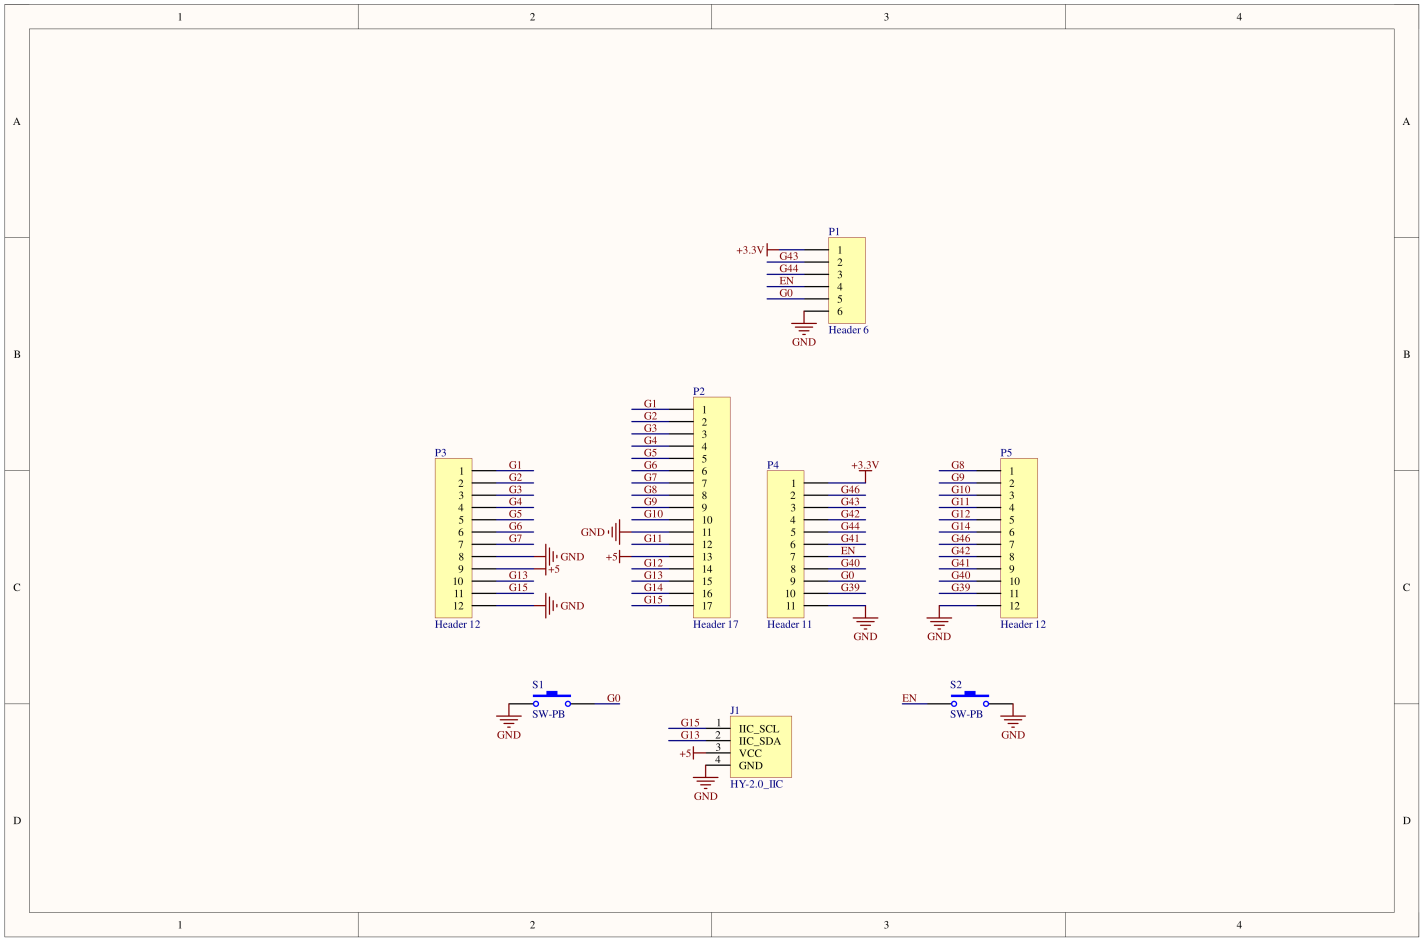

Model Size

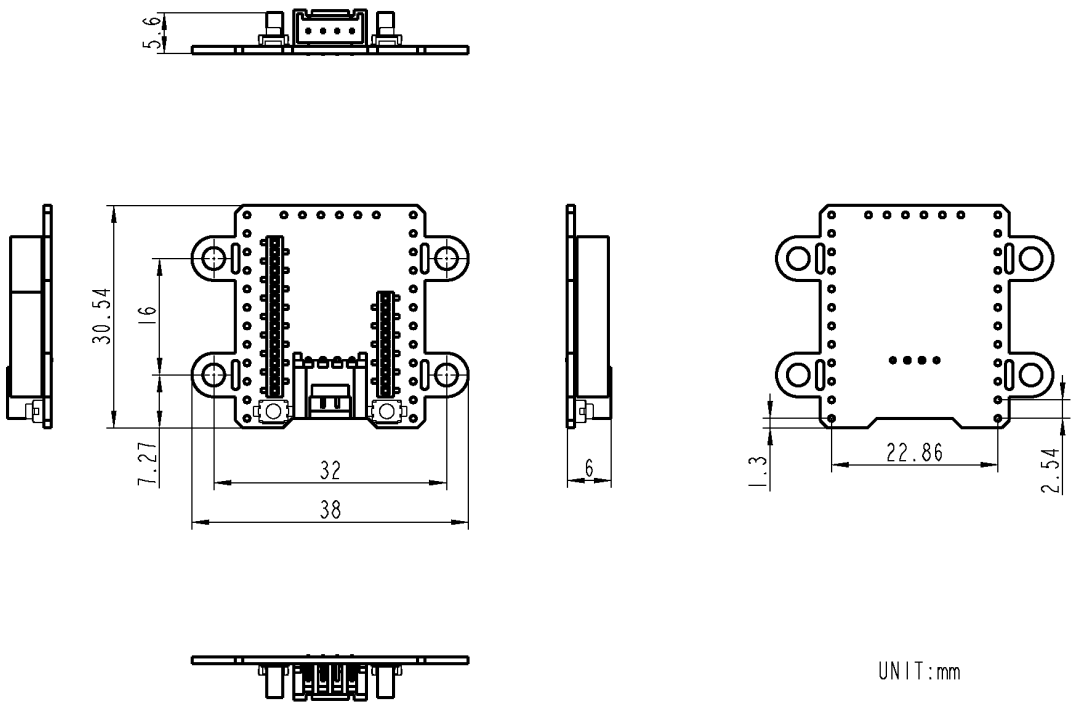

UNIT:mm