


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **CBH-07**
Sample Type & Sample Depth from top : **UDS & 1.50 m**

FLOW CURVE

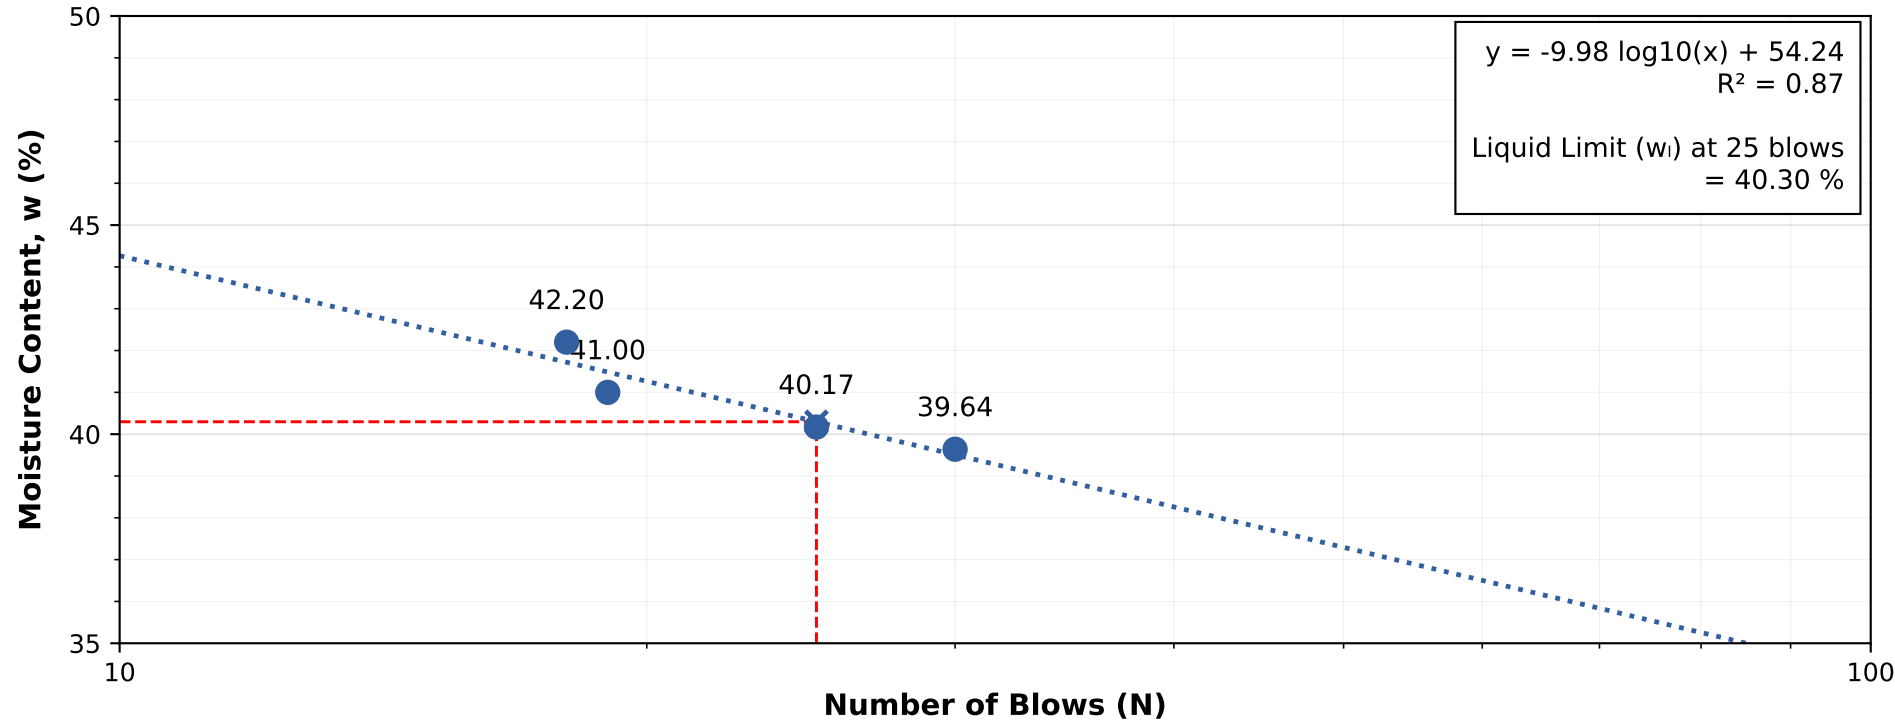

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	42.20
2	19	41.00
3	25	40.17
4	30	39.64

TEST RESULTS

Liquid Limit (w_l)	: 40.30 %
Plastic Limit (w_p)	: 19.60 %
Plasticity Index (PI)	: 20.70 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-07

Sample Type & Sample Depth from top : SPT & 3.50 m

FLOW CURVE

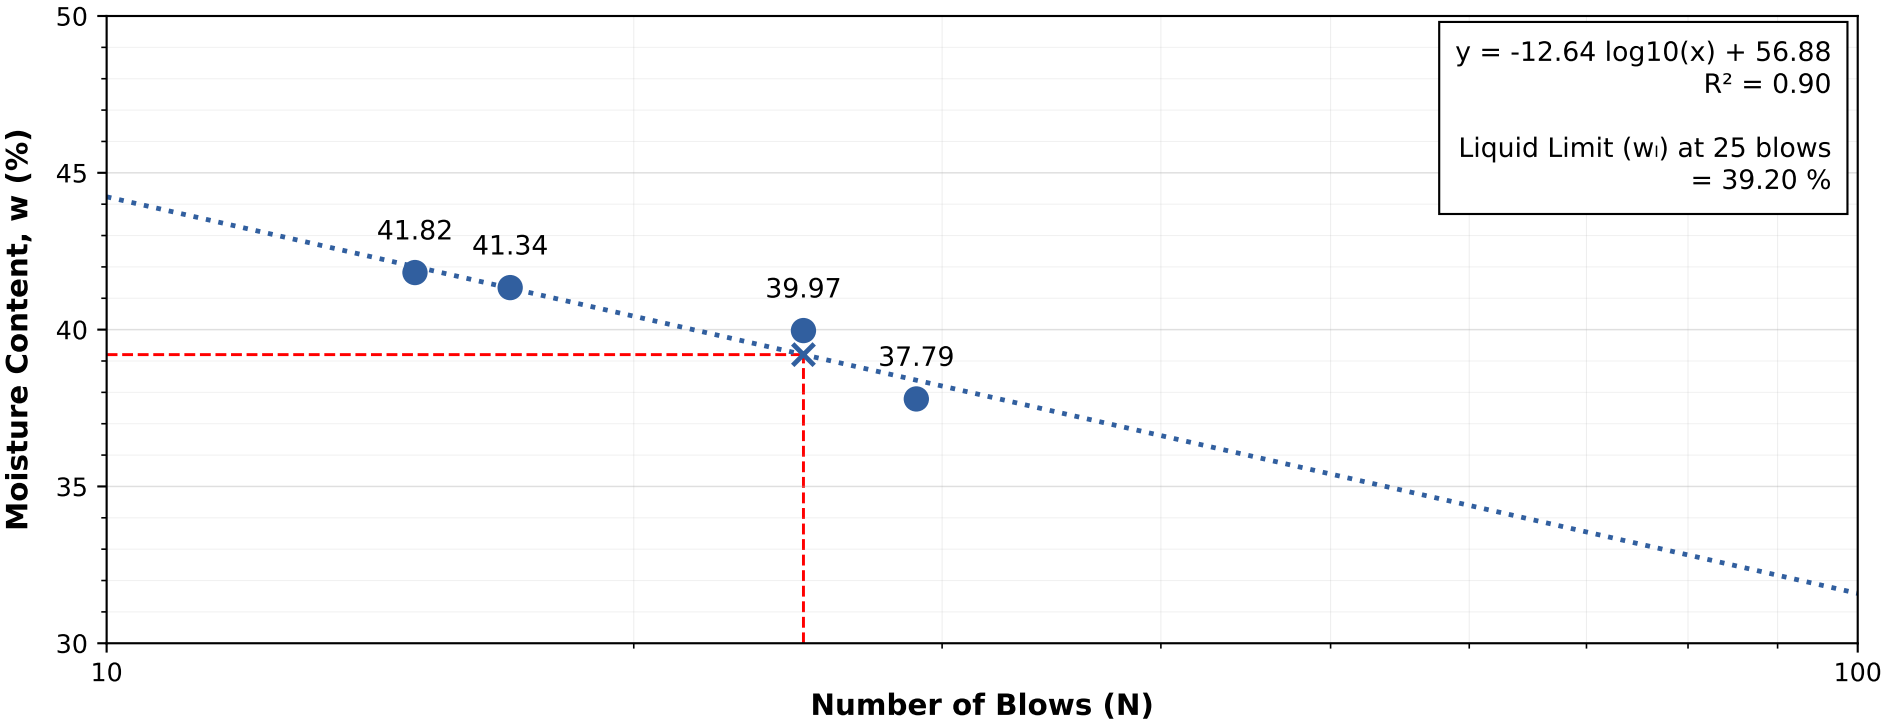

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	41.82
2	17	41.34
3	25	39.97
4	29	37.79

TEST RESULTS

Liquid Limit (w_L)	: 39.20 %
Plastic Limit (w_P)	: 18.30 %
Plasticity Index (PI)	: 20.90 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-07

Sample Type & Sample Depth from top : UDS & 4.50 m

FLOW CURVE

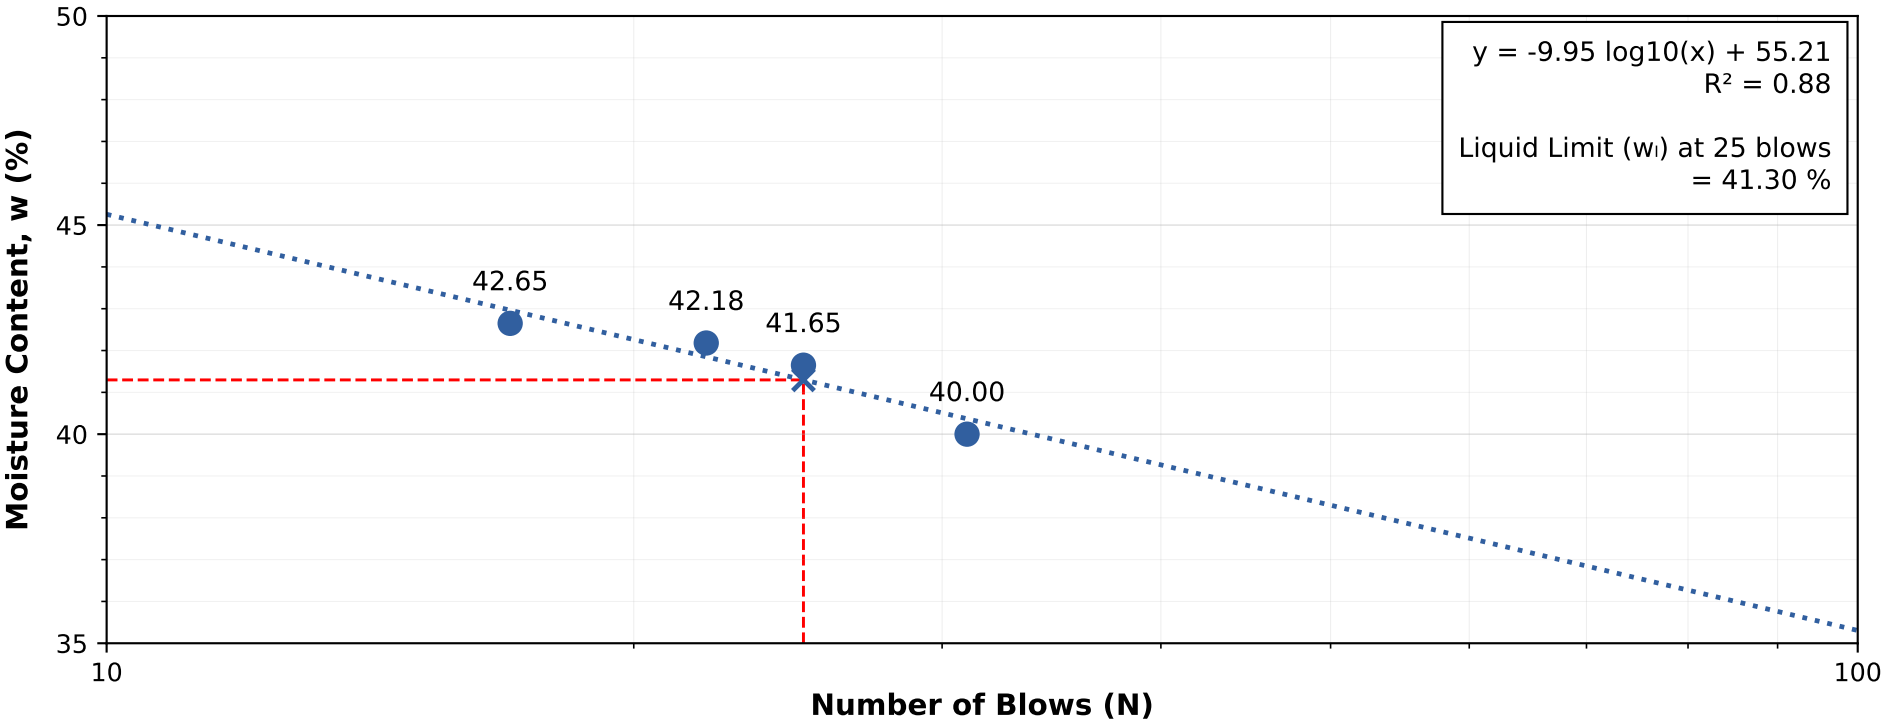

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	42.65
2	22	42.18
3	25	41.65
4	31	40.00

TEST RESULTS

Liquid Limit (w_L)	: 41.30 %
Plastic Limit (w_P)	: 20.00 %
Plasticity Index (PI)	: 21.30 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-07

Sample Type & Sample Depth from top : SPT & 6.50 m

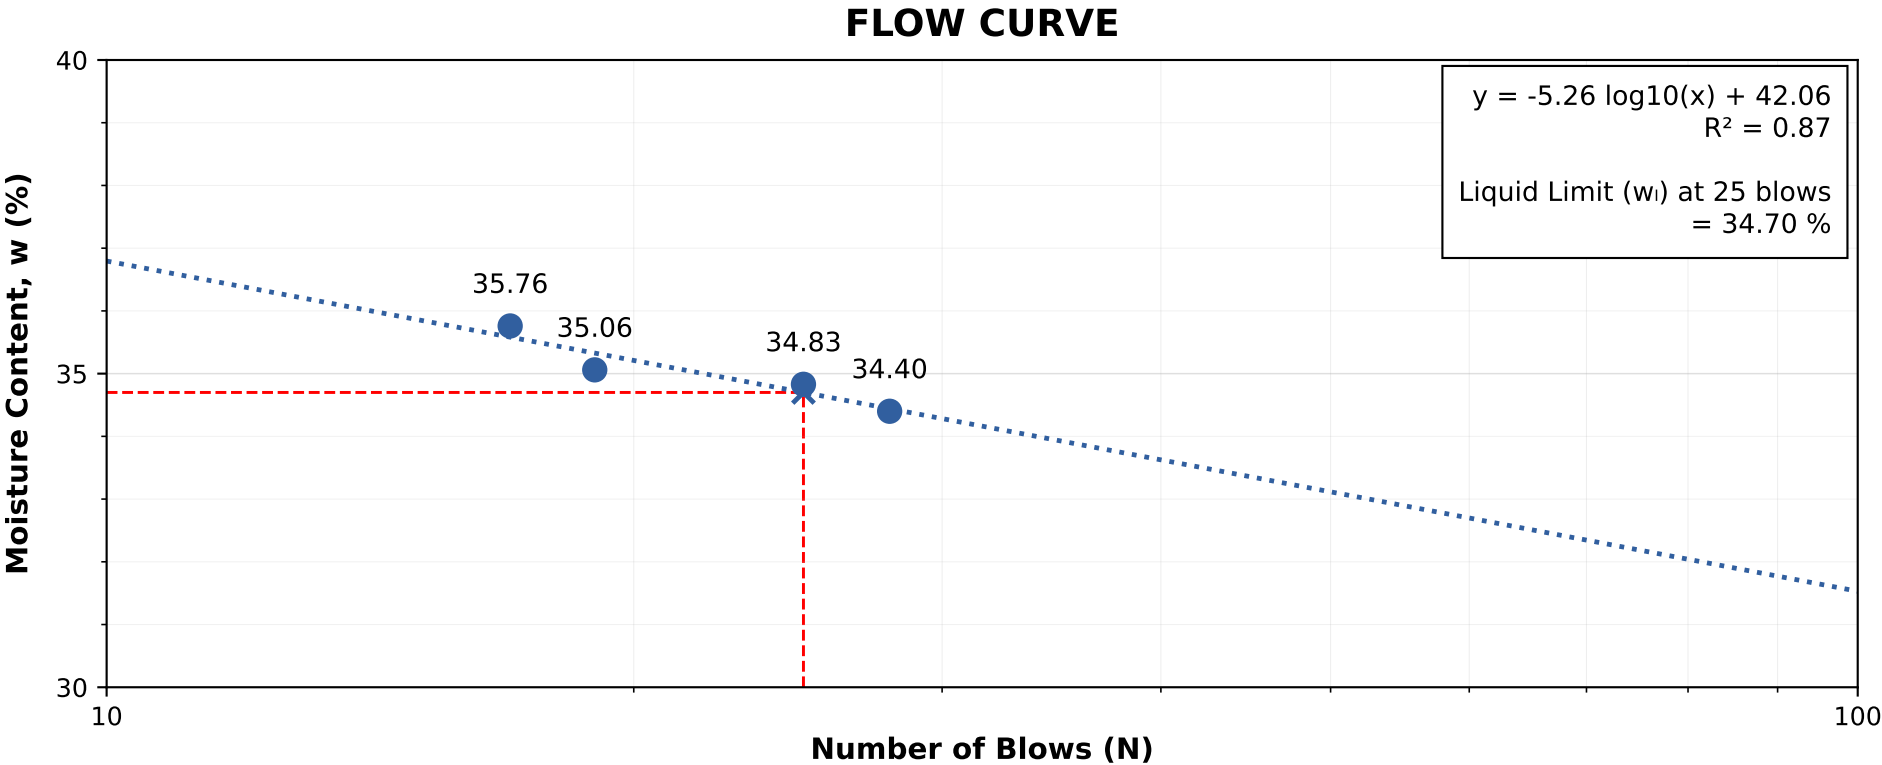

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	35.76
2	19	35.06
3	25	34.83
4	28	34.40

TEST RESULTS

Liquid Limit (w_l)	: 34.70 %
Plastic Limit (w_p)	: 16.90 %
Plasticity Index (PI)	: 17.80 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-07

Sample Type & Sample Depth from top : UDS & 7.50 m

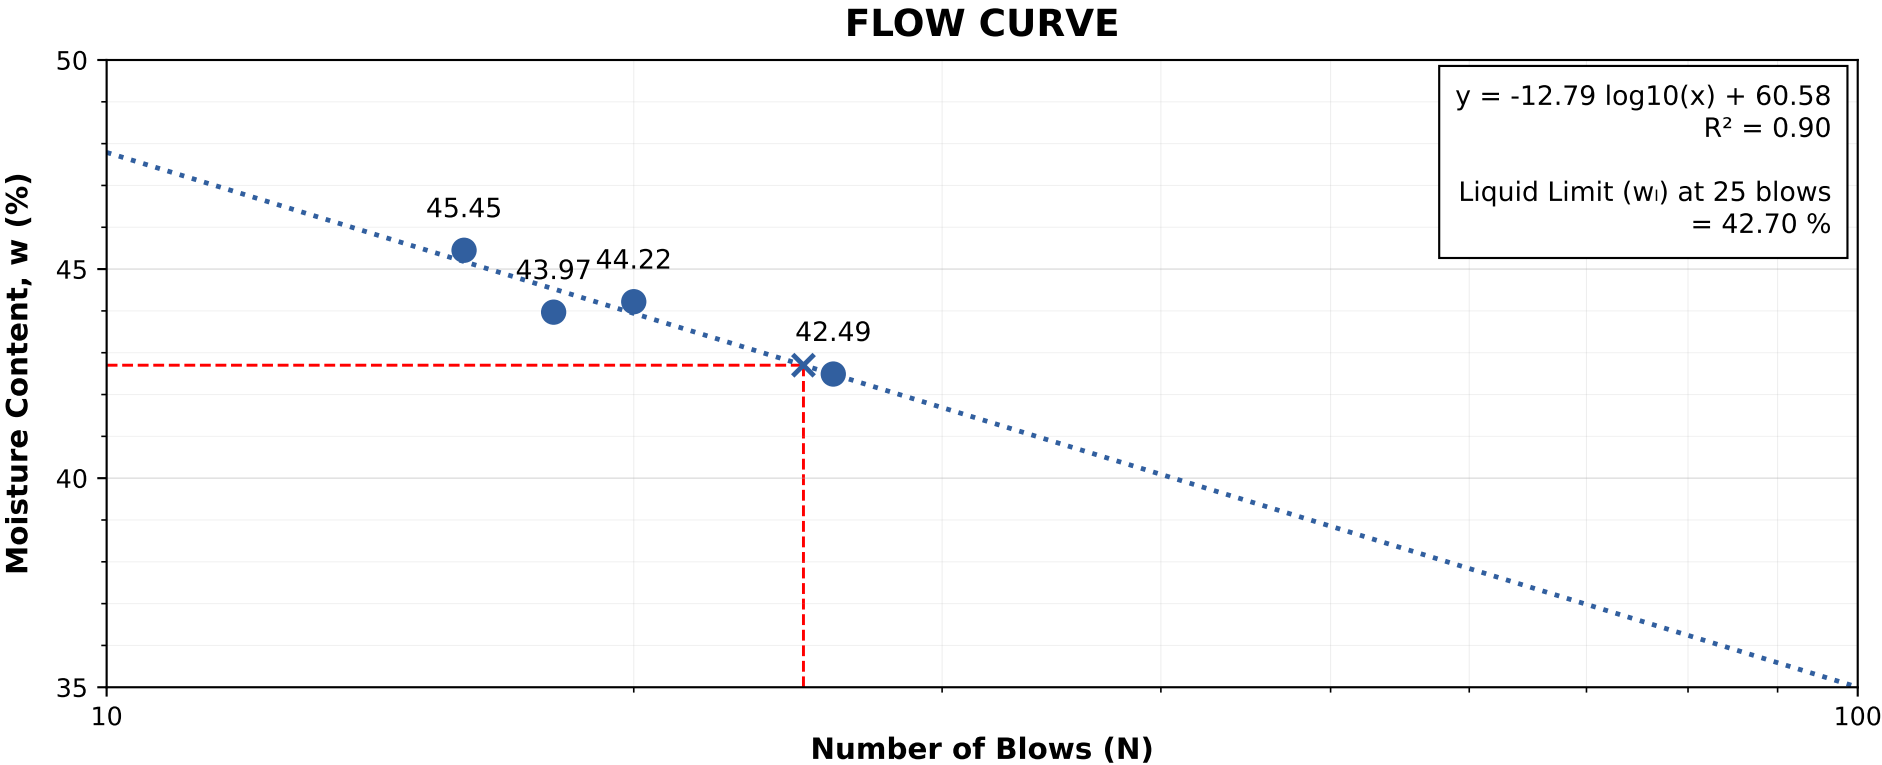

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	45.45
2	18	43.97
3	20	44.22
4	26	42.49

TEST RESULTS

Liquid Limit (w _L)	: 42.70 %
Plastic Limit (w _P)	: 20.90 %
Plasticity Index (PI)	: 21.80 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-07

Sample Type & Sample Depth from top : UDS & 10.50 m

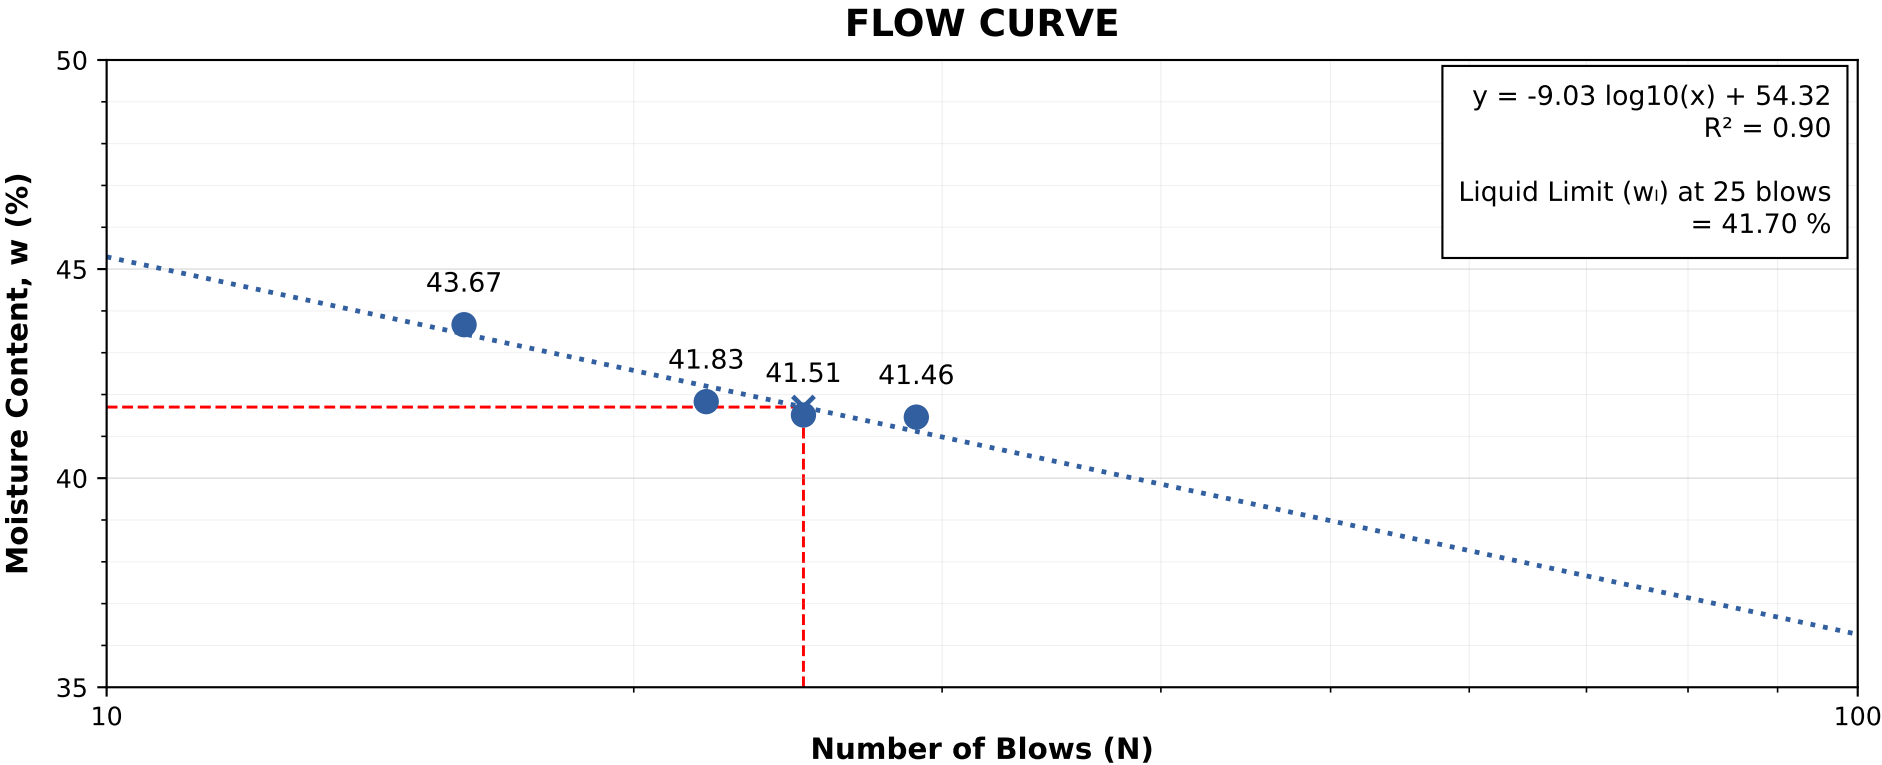

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	43.67
2	22	41.83
3	25	41.51
4	29	41.46

TEST RESULTS

Liquid Limit (w_L)	: 41.70 %
Plastic Limit (w_P)	: 20.20 %
Plasticity Index (PI)	: 21.50 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.