


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-17

Sample Type & Sample Depth from top : UDS & 1.50 m

FLOW CURVE

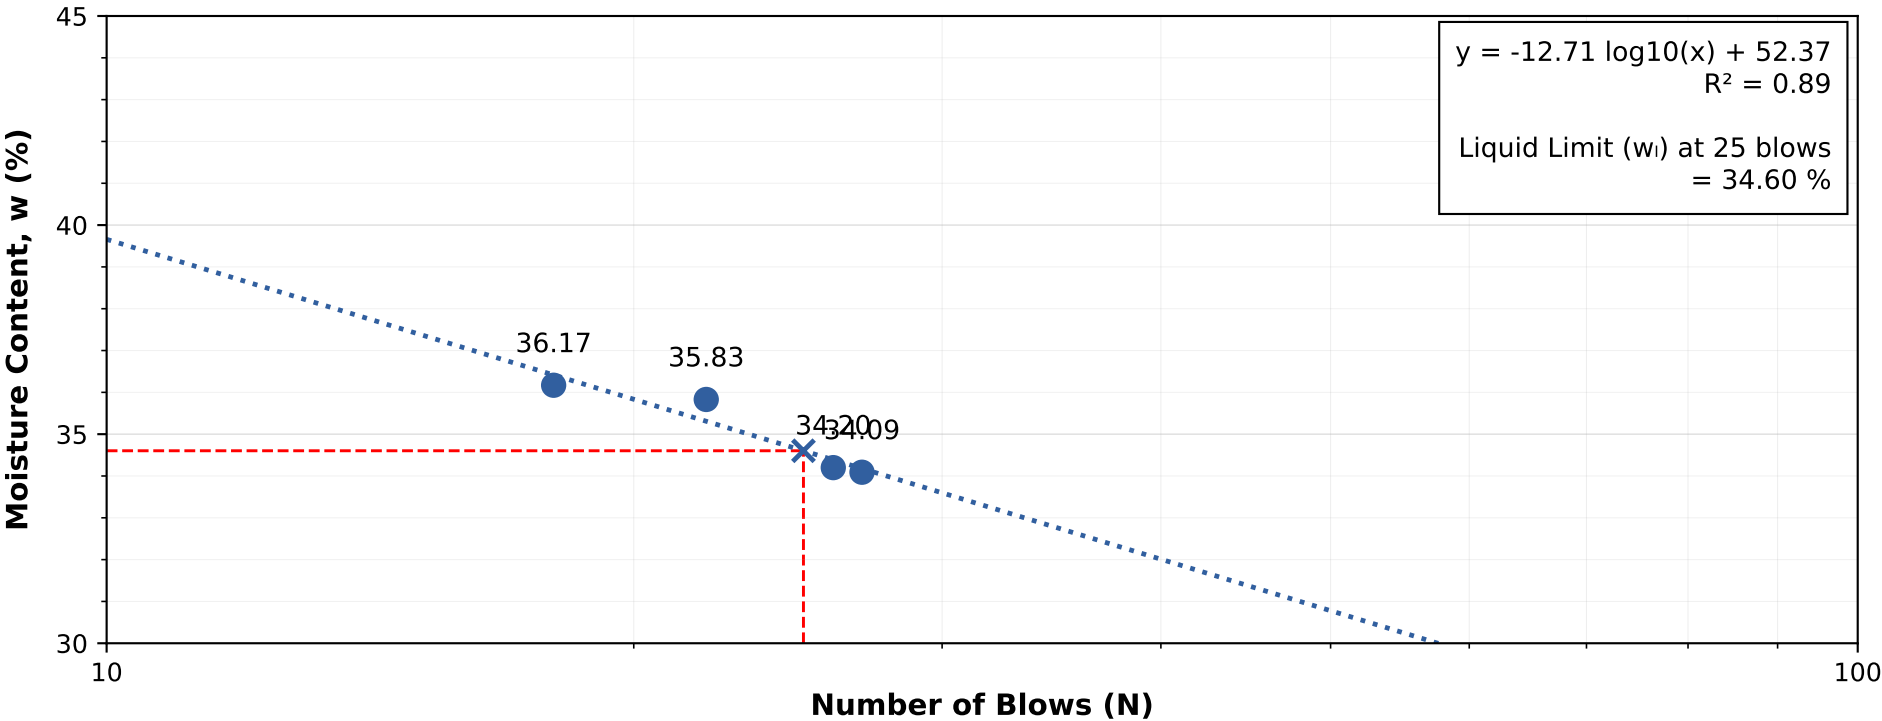

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	36.17
2	22	35.83
3	26	34.20
4	27	34.09

TEST RESULTS

Liquid Limit (w_L)	: 34.60 %
Plastic Limit (w_P)	: 17.00 %
Plasticity Index (PI)	: 17.60 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-17

Sample Type & Sample Depth from top : UDS & 4.50 m

FLOW CURVE

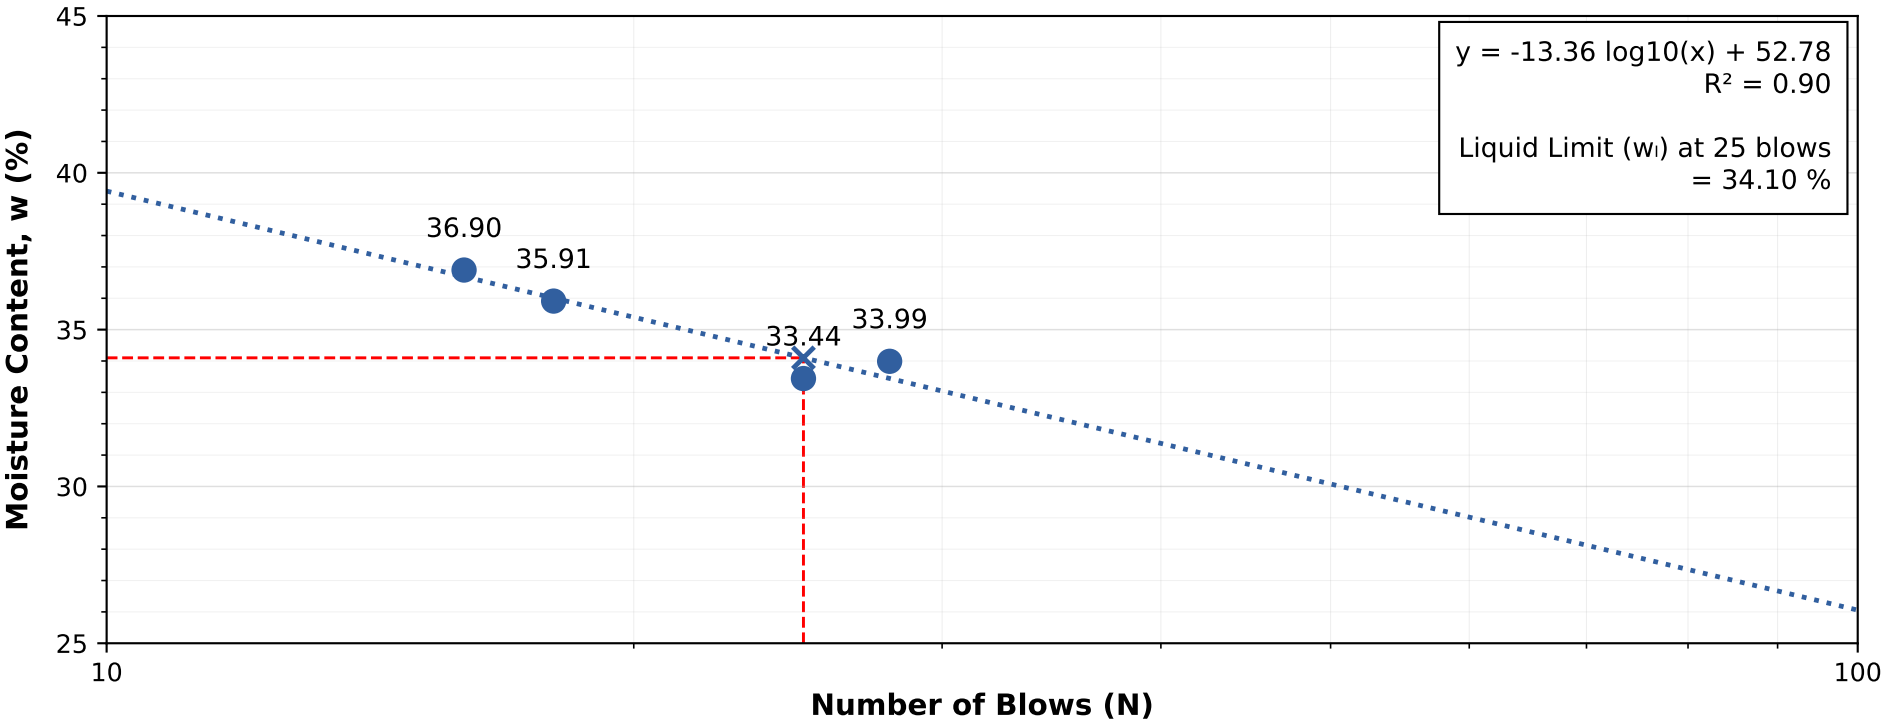

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	36.90
2	18	35.91
3	25	33.44
4	28	33.99

TEST RESULTS

Liquid Limit (w_L)	: 34.10 %
Plastic Limit (w_P)	: 16.80 %
Plasticity Index (PI)	: 17.30 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-17

Sample Type & Sample Depth from top : UDS & 7.50 m

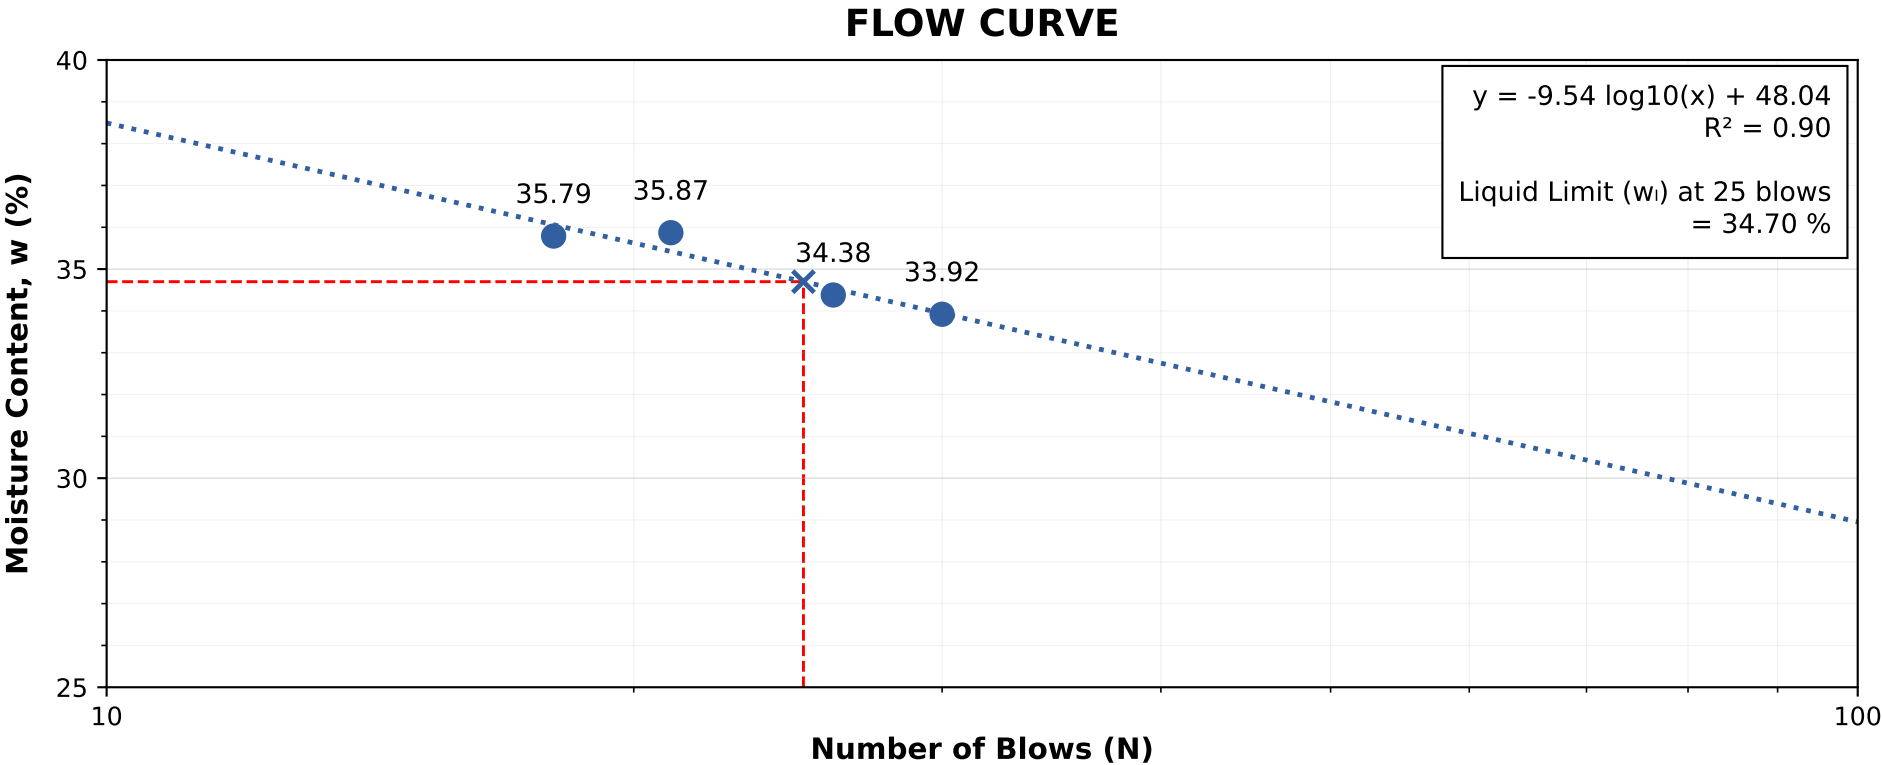

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	35.79
2	21	35.87
3	26	34.38
4	30	33.92

TEST RESULTS

Liquid Limit (w_l)	: 34.70 %
Plastic Limit (w_p)	: 15.90 %
Plasticity Index (PI)	: 18.80 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-17

Sample Type & Sample Depth from top : SPT & 10.50 m

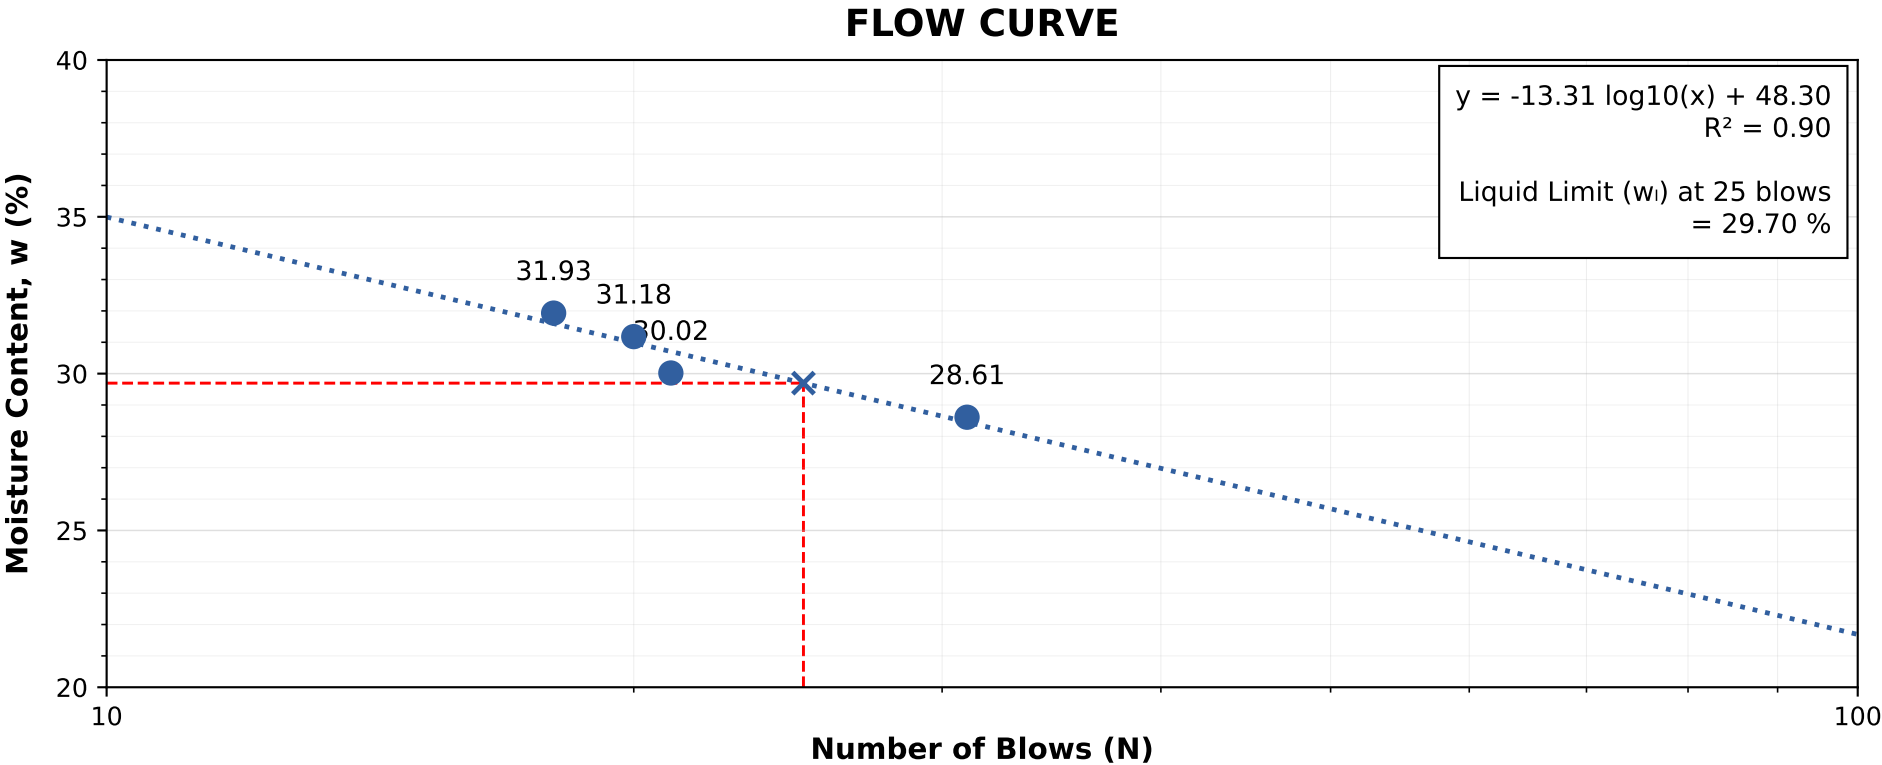

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	31.93
2	20	31.18
3	21	30.02
4	31	28.61

TEST RESULTS

Liquid Limit (w_L)	: 29.70 %
Plastic Limit (w_P)	: 15.10 %
Plasticity Index (PI)	: 14.60 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-17

Sample Type & Sample Depth from top : SPT & 15.00 m

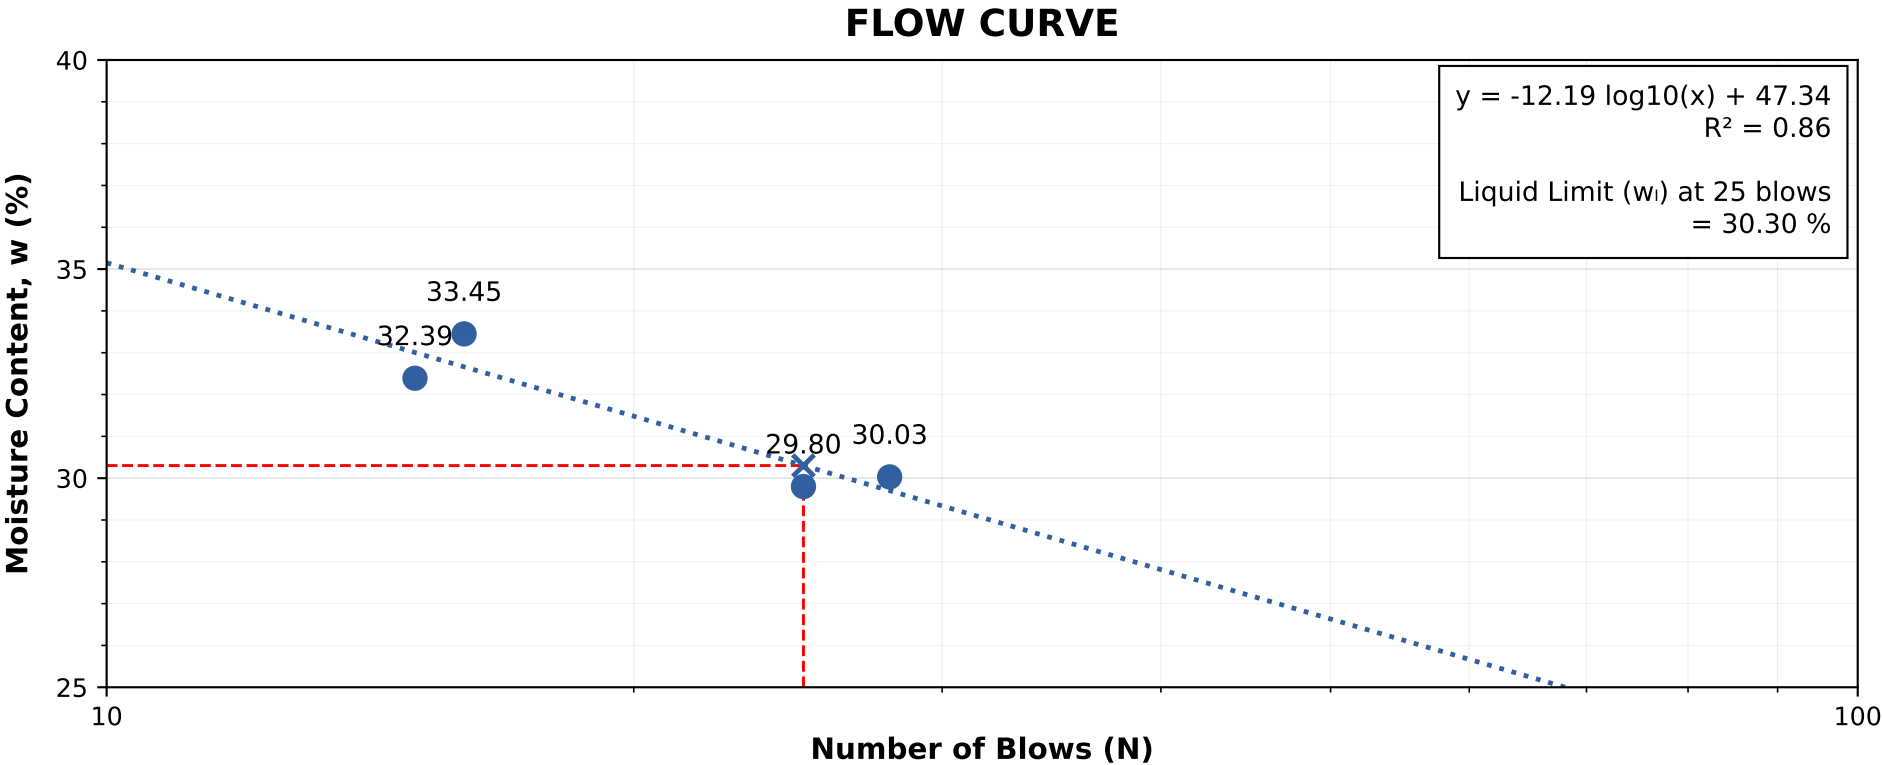

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	32.39
2	16	33.45
3	25	29.80
4	28	30.03

TEST RESULTS

Liquid Limit (w_l)	: 30.30 %
Plastic Limit (w_p)	: 14.60 %
Plasticity Index (PI)	: 15.70 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.