


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : UDS & 1.50 m

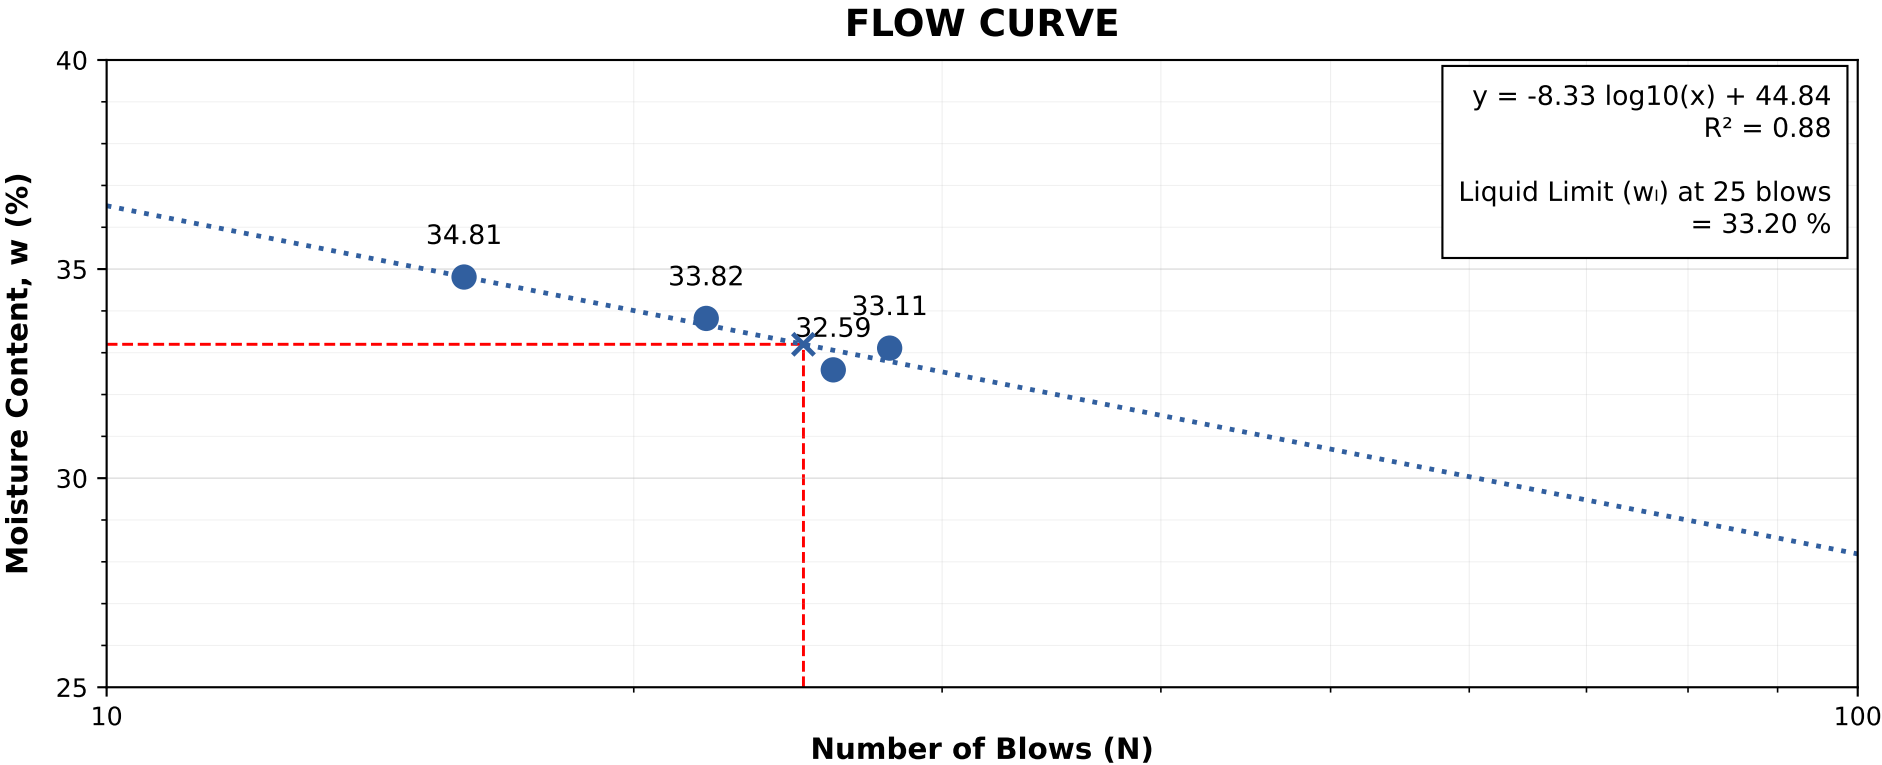

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	34.81
2	22	33.82
3	26	32.59
4	28	33.11

TEST RESULTS

Liquid Limit (w_l)	: 33.20 %
Plastic Limit (w_p)	: 14.60 %
Plasticity Index (PI)	: 18.60 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : SPT & 3.50 m

FLOW CURVE

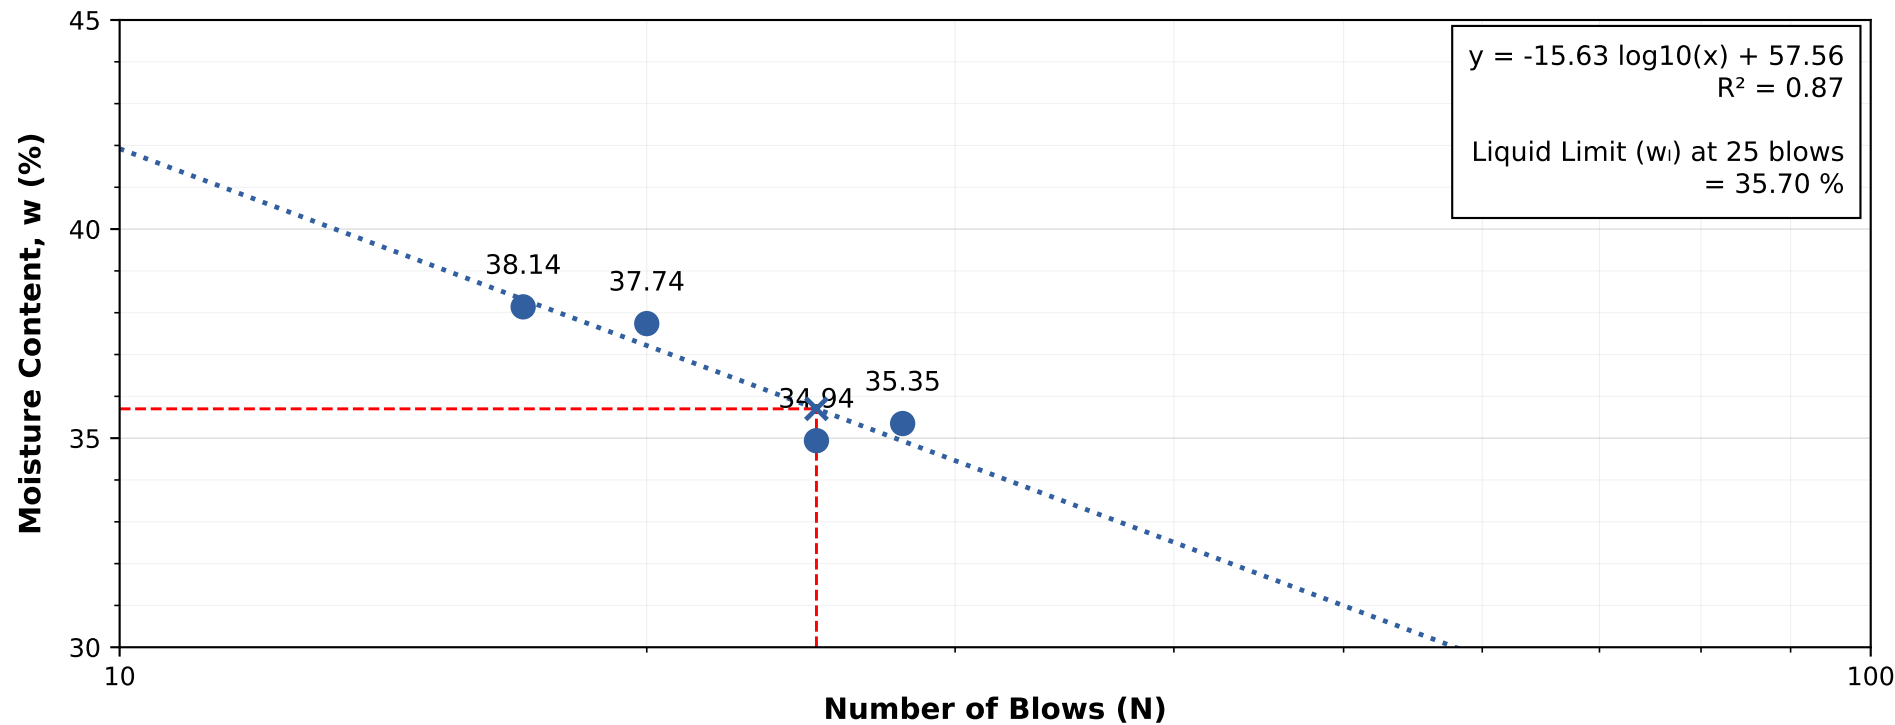

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	38.14
2	20	37.74
3	25	34.94
4	28	35.35

TEST RESULTS

Liquid Limit (w_L)	: 35.70 %
Plastic Limit (w_P)	: 16.10 %
Plasticity Index (PI)	: 19.60 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : UDS & 4.50 m

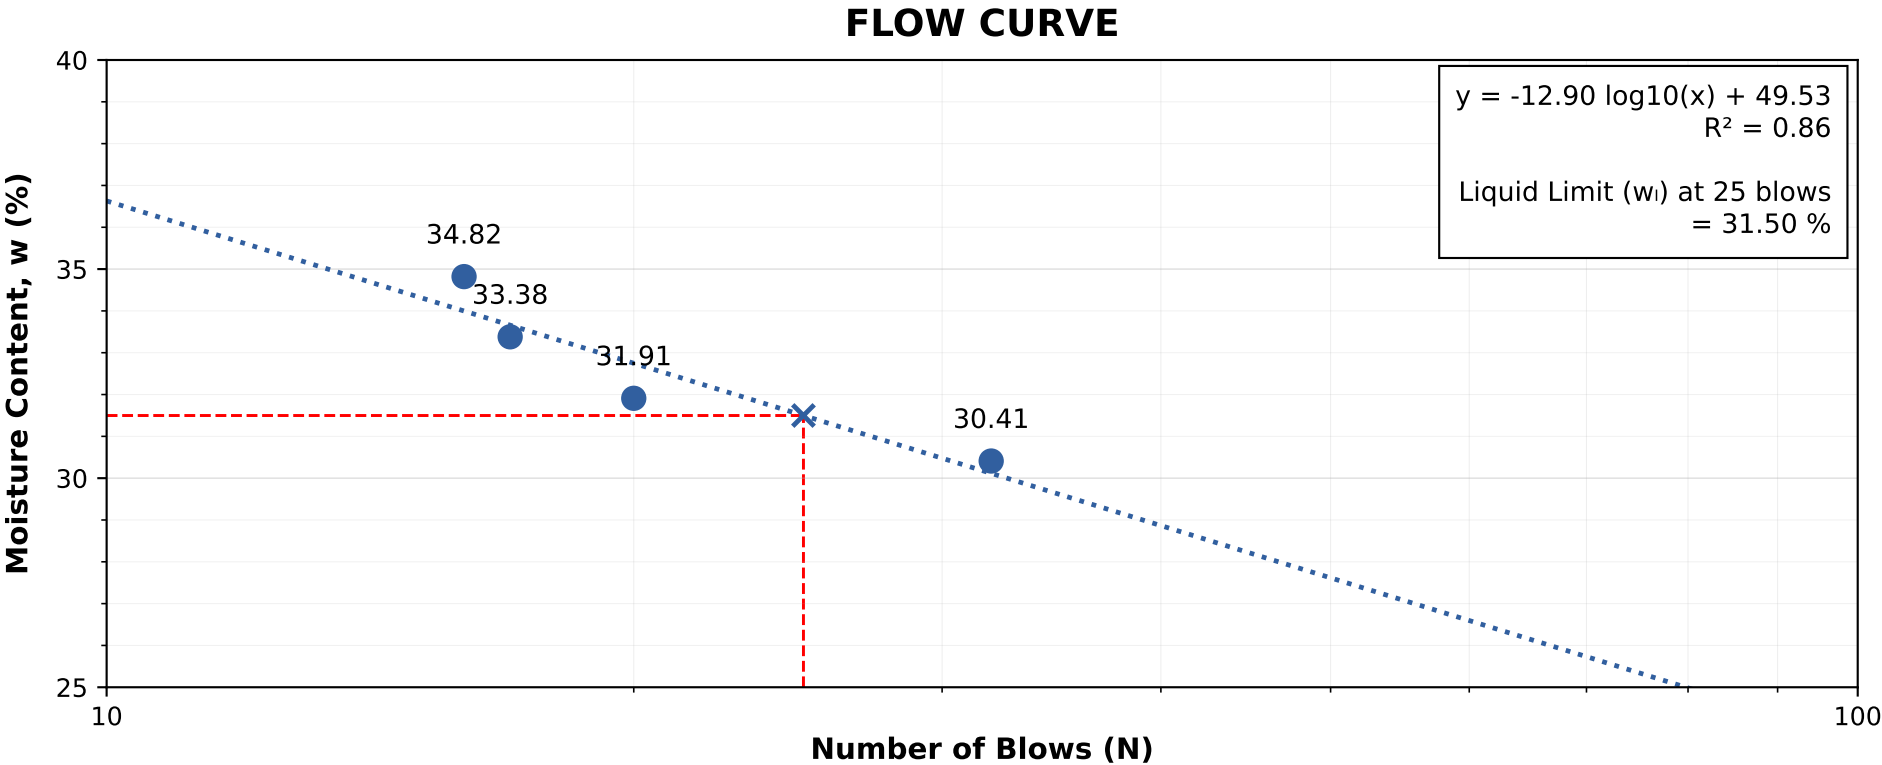

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	34.82
2	17	33.38
3	20	31.91
4	32	30.41

TEST RESULTS

Liquid Limit (w_l)	: 31.50 %
Plastic Limit (w_p)	: 14.00 %
Plasticity Index (PI)	: 17.50 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : UDS & 7.50 m

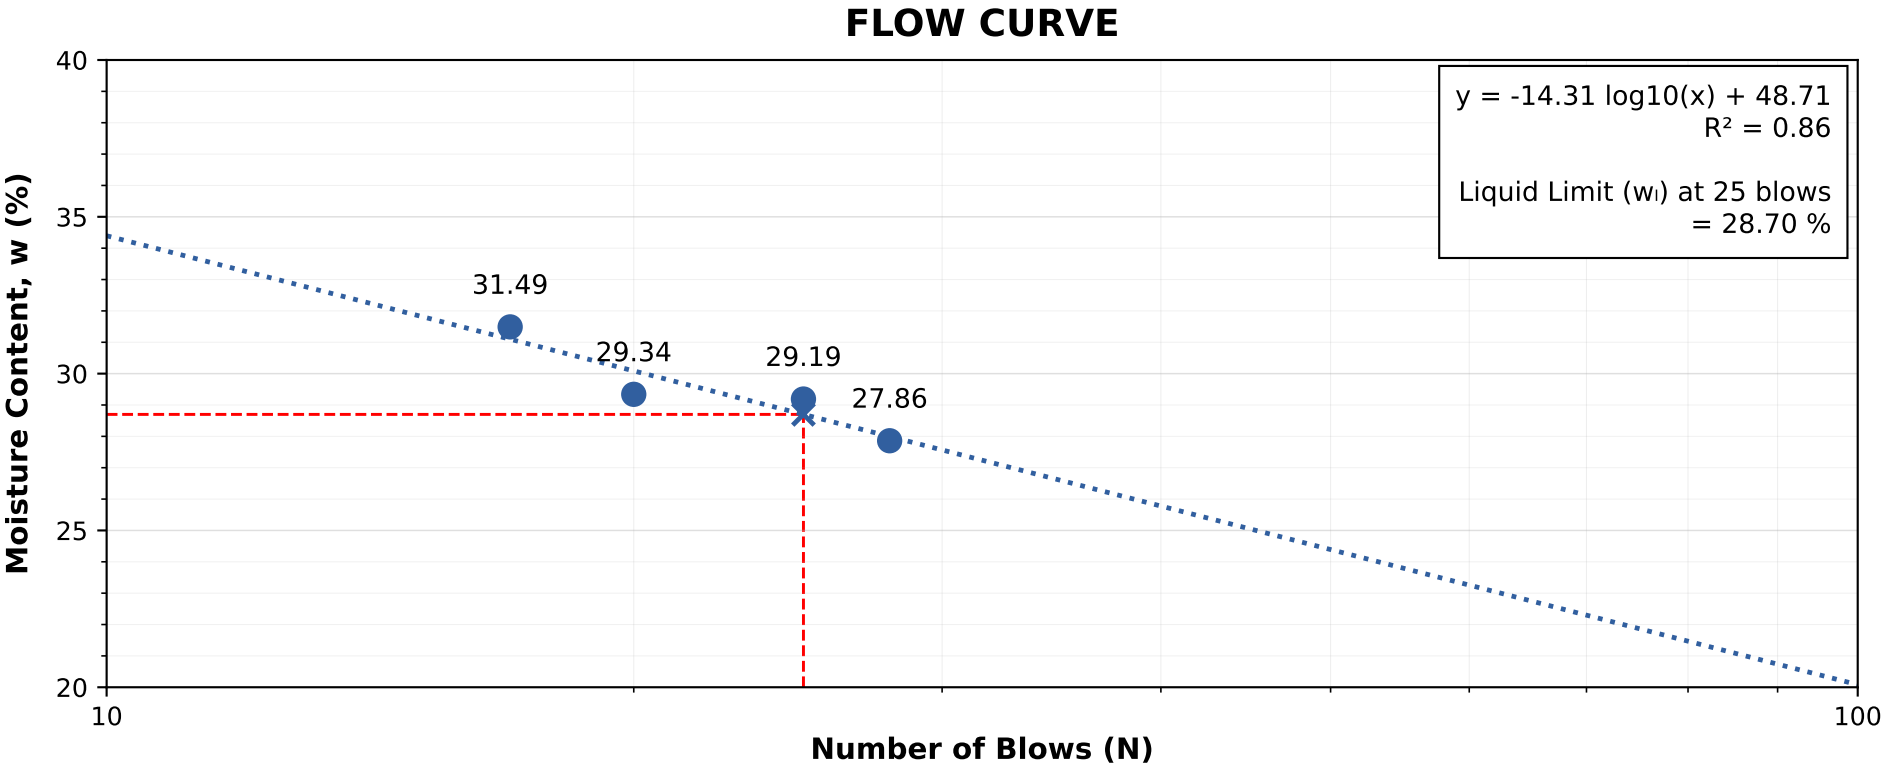

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	31.49
2	20	29.34
3	25	29.19
4	28	27.86

TEST RESULTS

Liquid Limit (w_L)	: 28.70 %
Plastic Limit (w_P)	: 14.20 %
Plasticity Index (PI)	: 14.50 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : UDS & 10.50 m

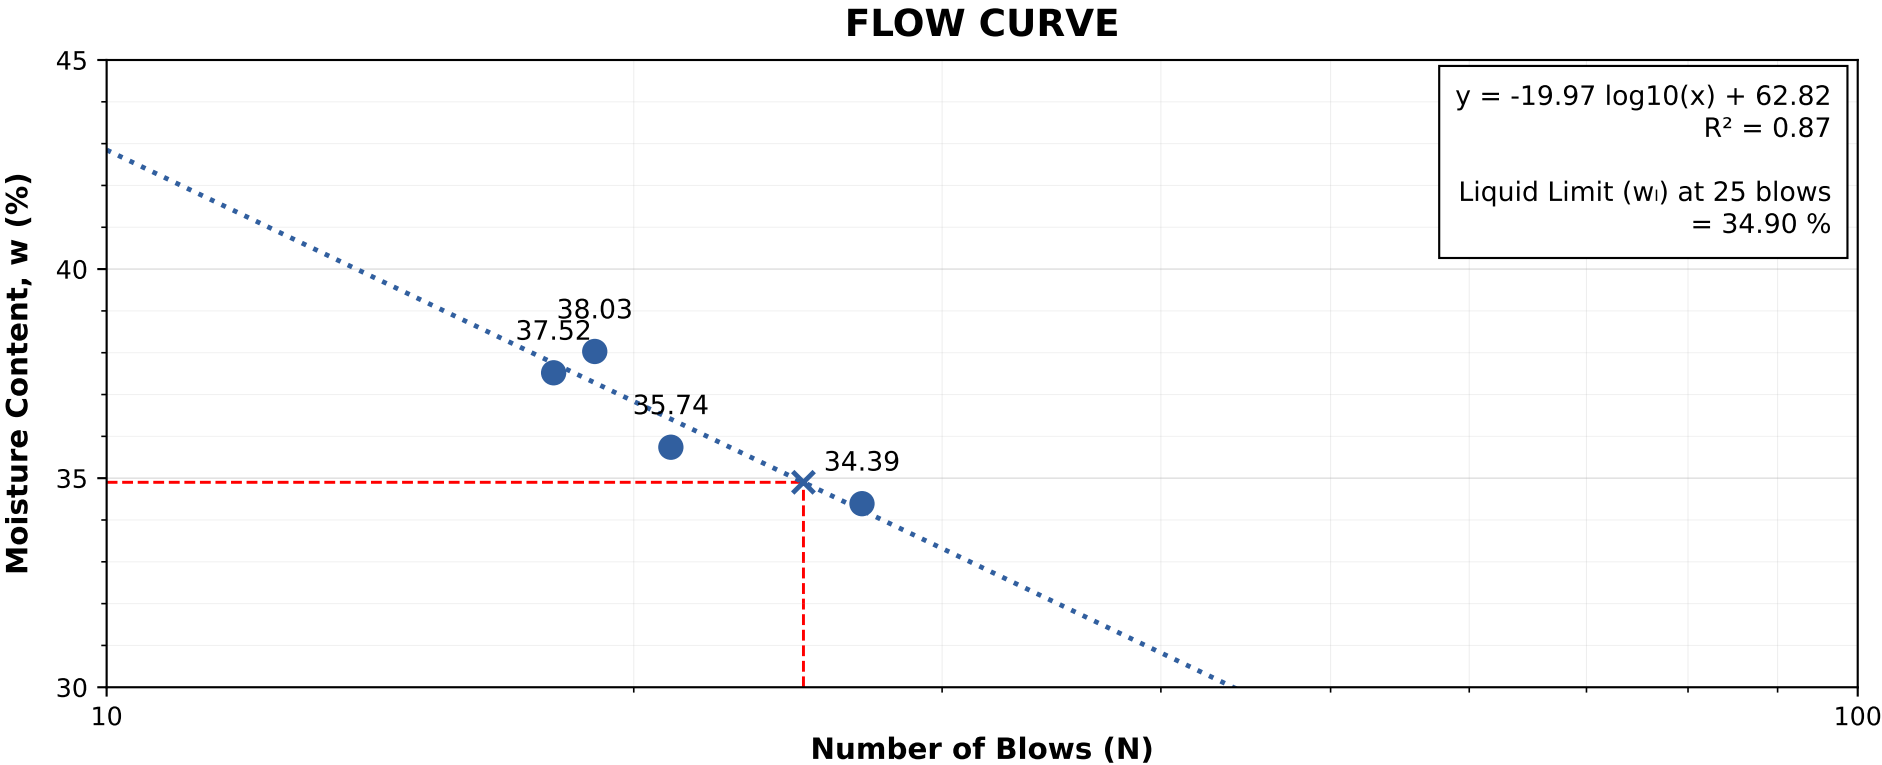

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	37.52
2	19	38.03
3	21	35.74
4	27	34.39

TEST RESULTS

Liquid Limit (w_l)	: 34.90 %
Plastic Limit (w_p)	: 15.40 %
Plasticity Index (PI)	: 19.50 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-18

Sample Type & Sample Depth from top : SPT & 13.50 m

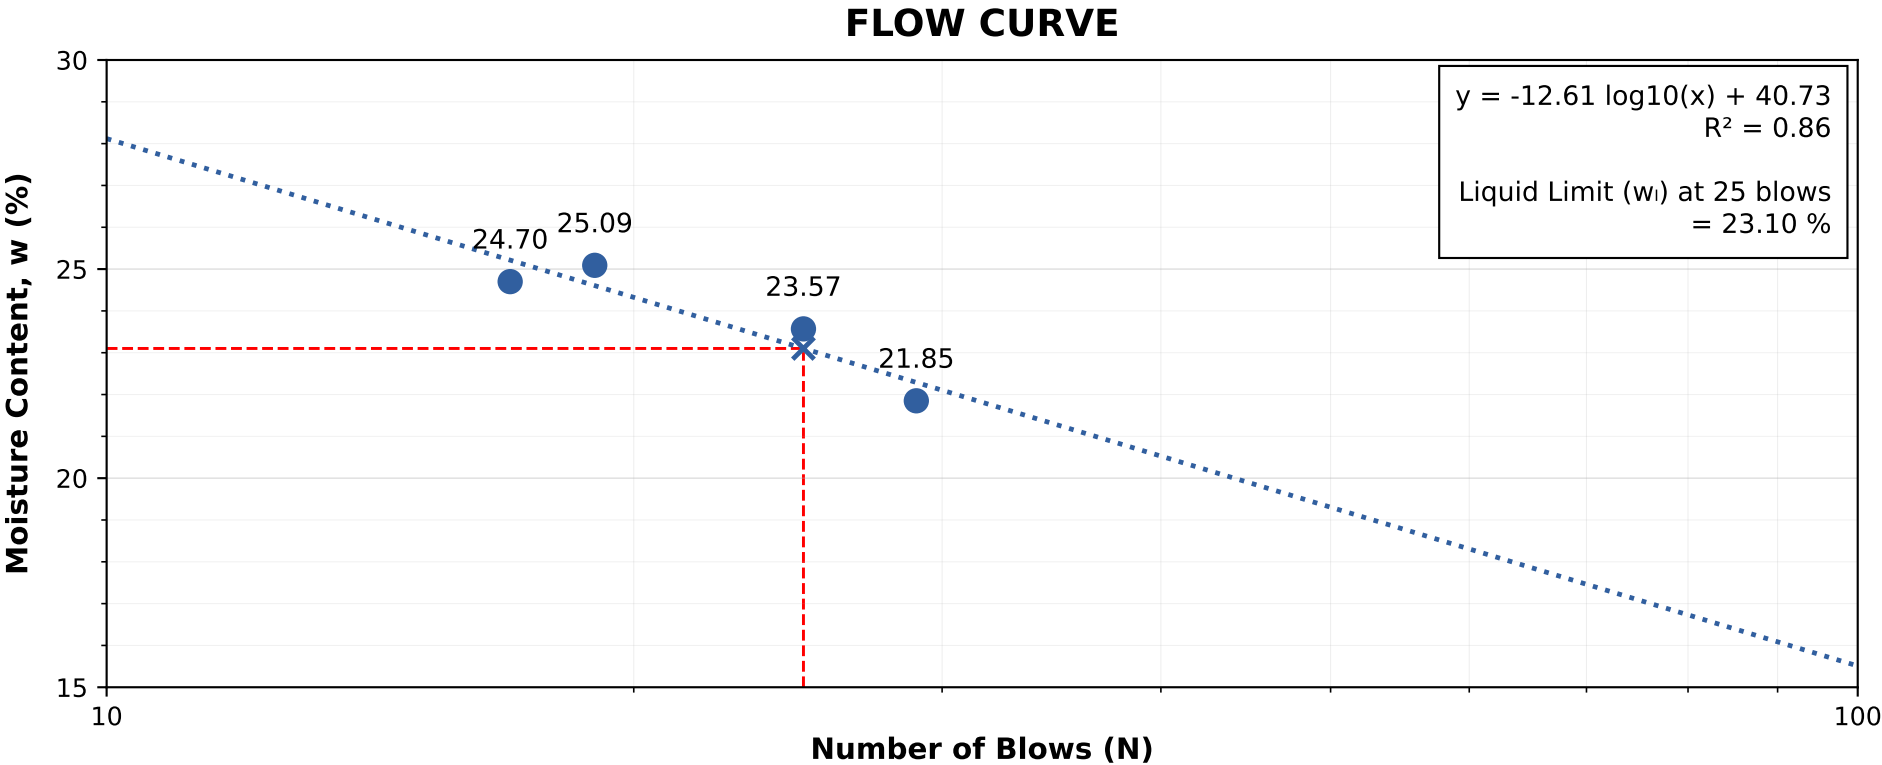

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	24.70
2	19	25.09
3	25	23.57
4	29	21.85

TEST RESULTS

Liquid Limit (w_L)	: 23.10 %
Plastic Limit (w_P)	: 12.60 %
Plasticity Index (PI)	: 10.50 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.