


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-9

Sample Type & Sample Depth from top : UDS & 1.50 m

FLOW CURVE

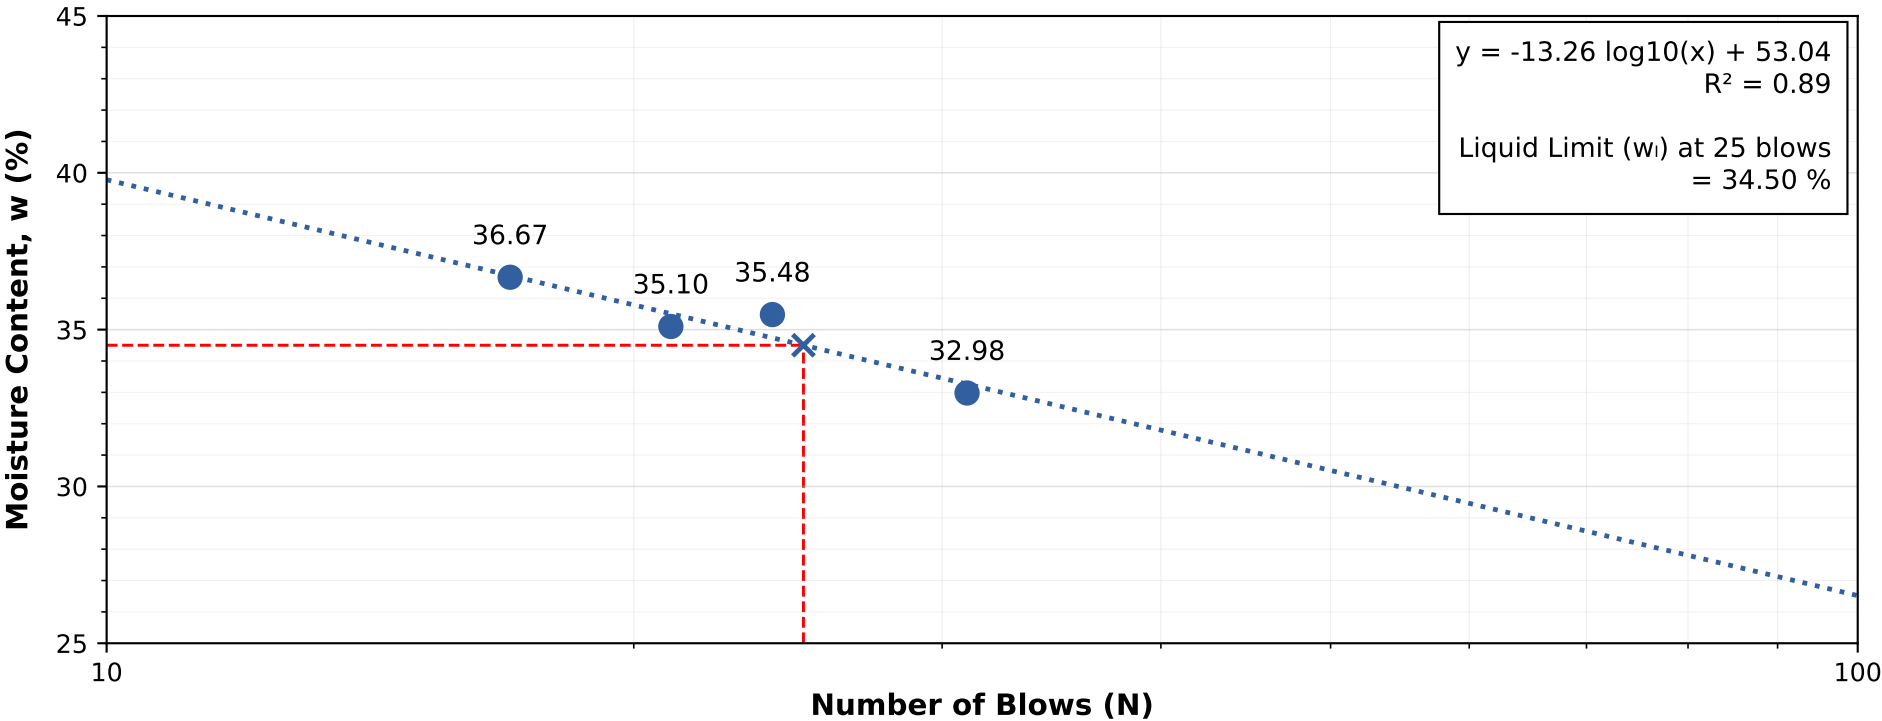

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	36.67
2	21	35.10
3	24	35.48
4	31	32.98

TEST RESULTS

Liquid Limit (w_l)	: 34.50 %
Plastic Limit (w_p)	: 16.80 %
Plasticity Index (PI)	: 17.70 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-9

Sample Type & Sample Depth from top : UDS & 4.50 m

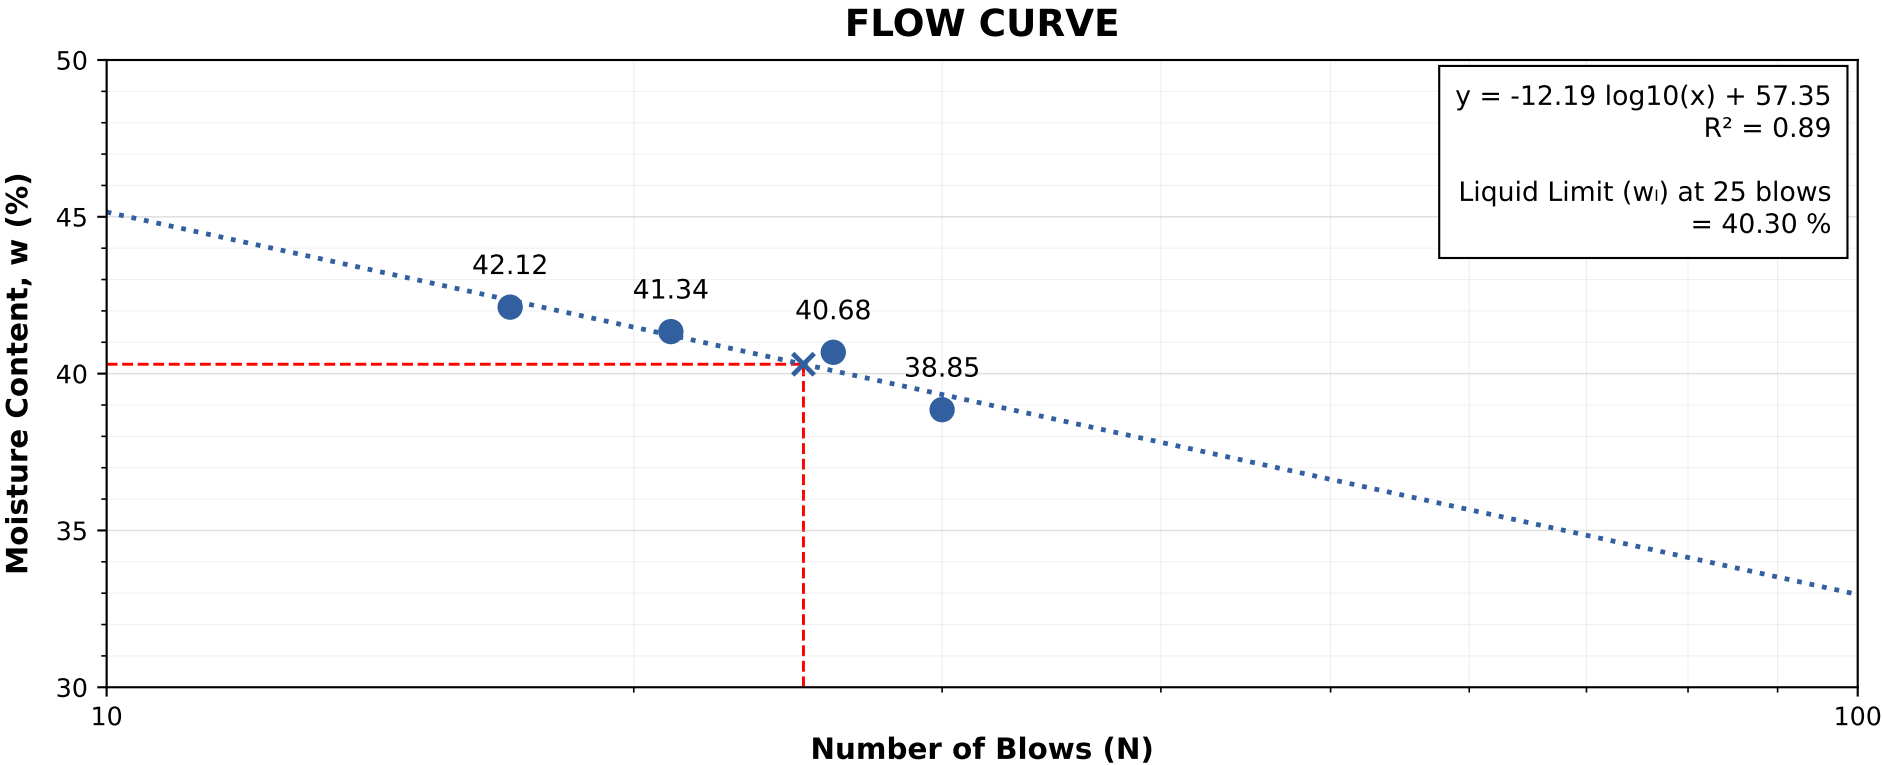

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	42.12
2	21	41.34
3	26	40.68
4	30	38.85

TEST RESULTS

Liquid Limit (w_L)	: 40.30 %
Plastic Limit (w_P)	: 19.00 %
Plasticity Index (PI)	: 21.30 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-9

Sample Type & Sample Depth from top : UDS & 7.50 m

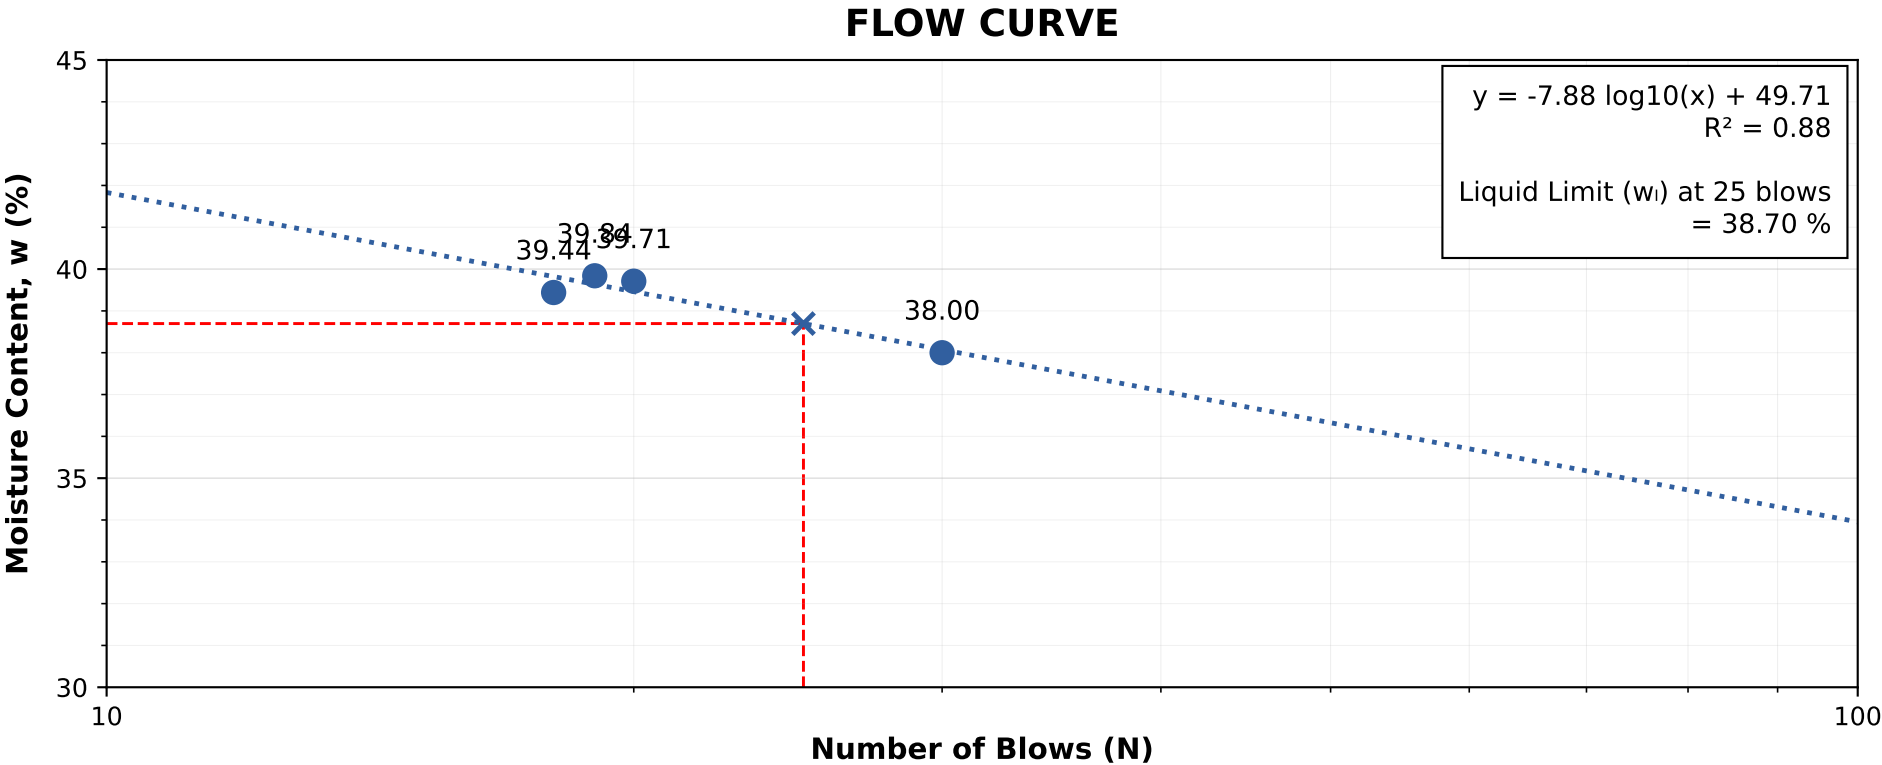

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	39.44
2	19	39.84
3	20	39.71
4	30	38.00

TEST RESULTS

Liquid Limit (w_L)	: 38.70 %
Plastic Limit (w_P)	: 17.10 %
Plasticity Index (PI)	: 21.60 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-9

Sample Type & Sample Depth from top : UDS & 10.50 m

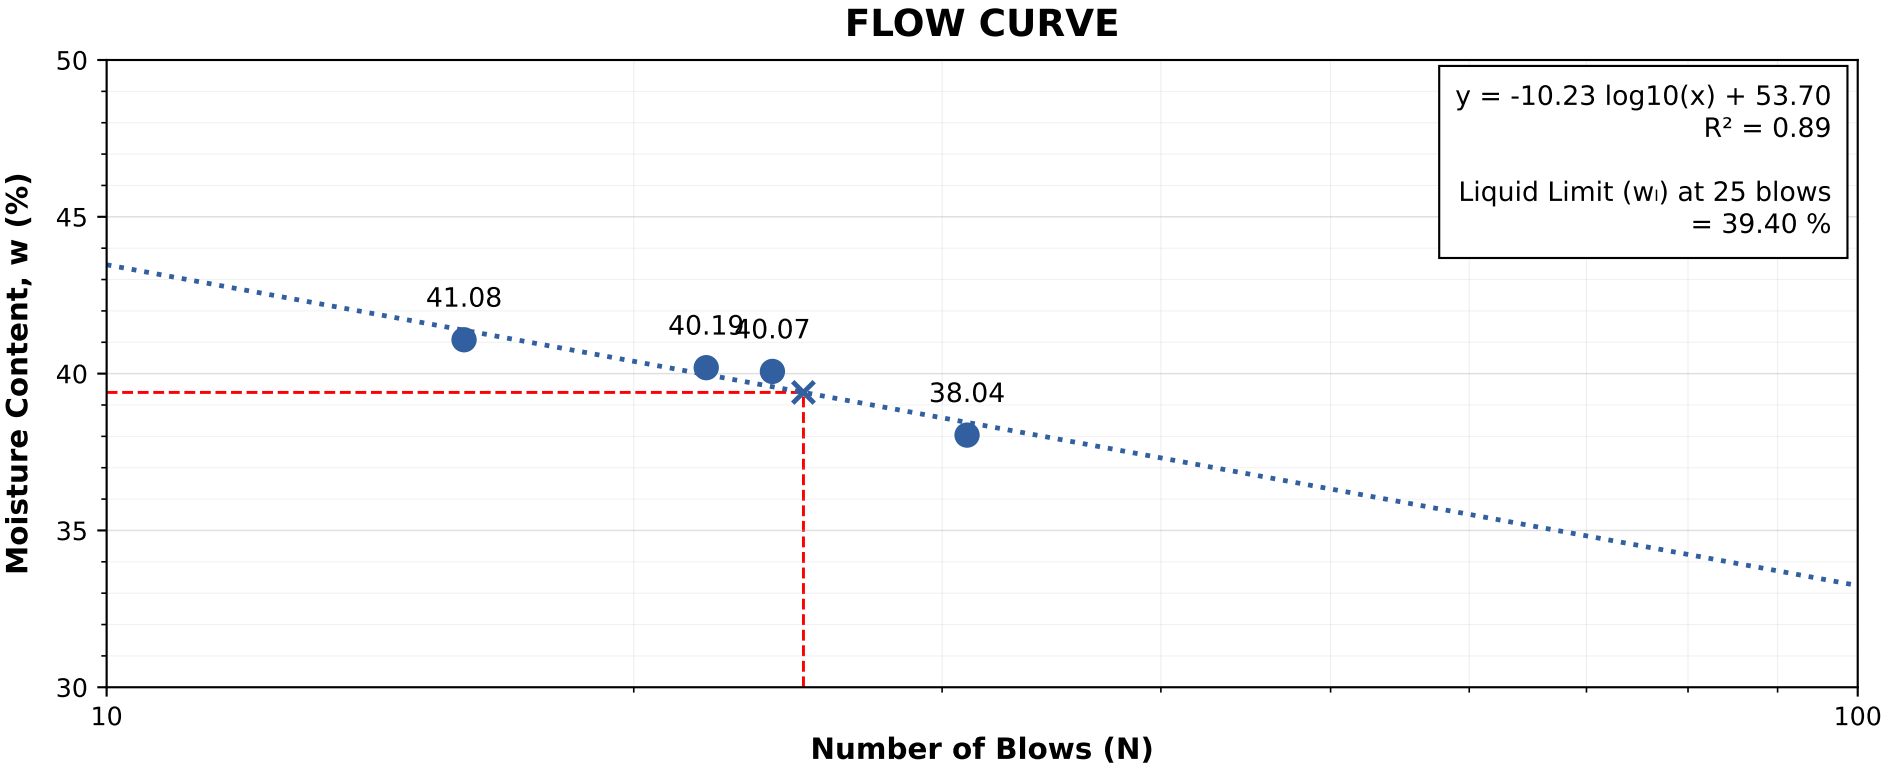

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	41.08
2	22	40.19
3	24	40.07
4	31	38.04

TEST RESULTS

Liquid Limit (w_L)	: 39.40 %
Plastic Limit (w_P)	: 18.60 %
Plasticity Index (PI)	: 20.80 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-9

Sample Type & Sample Depth from top : UDS & 13.50 m

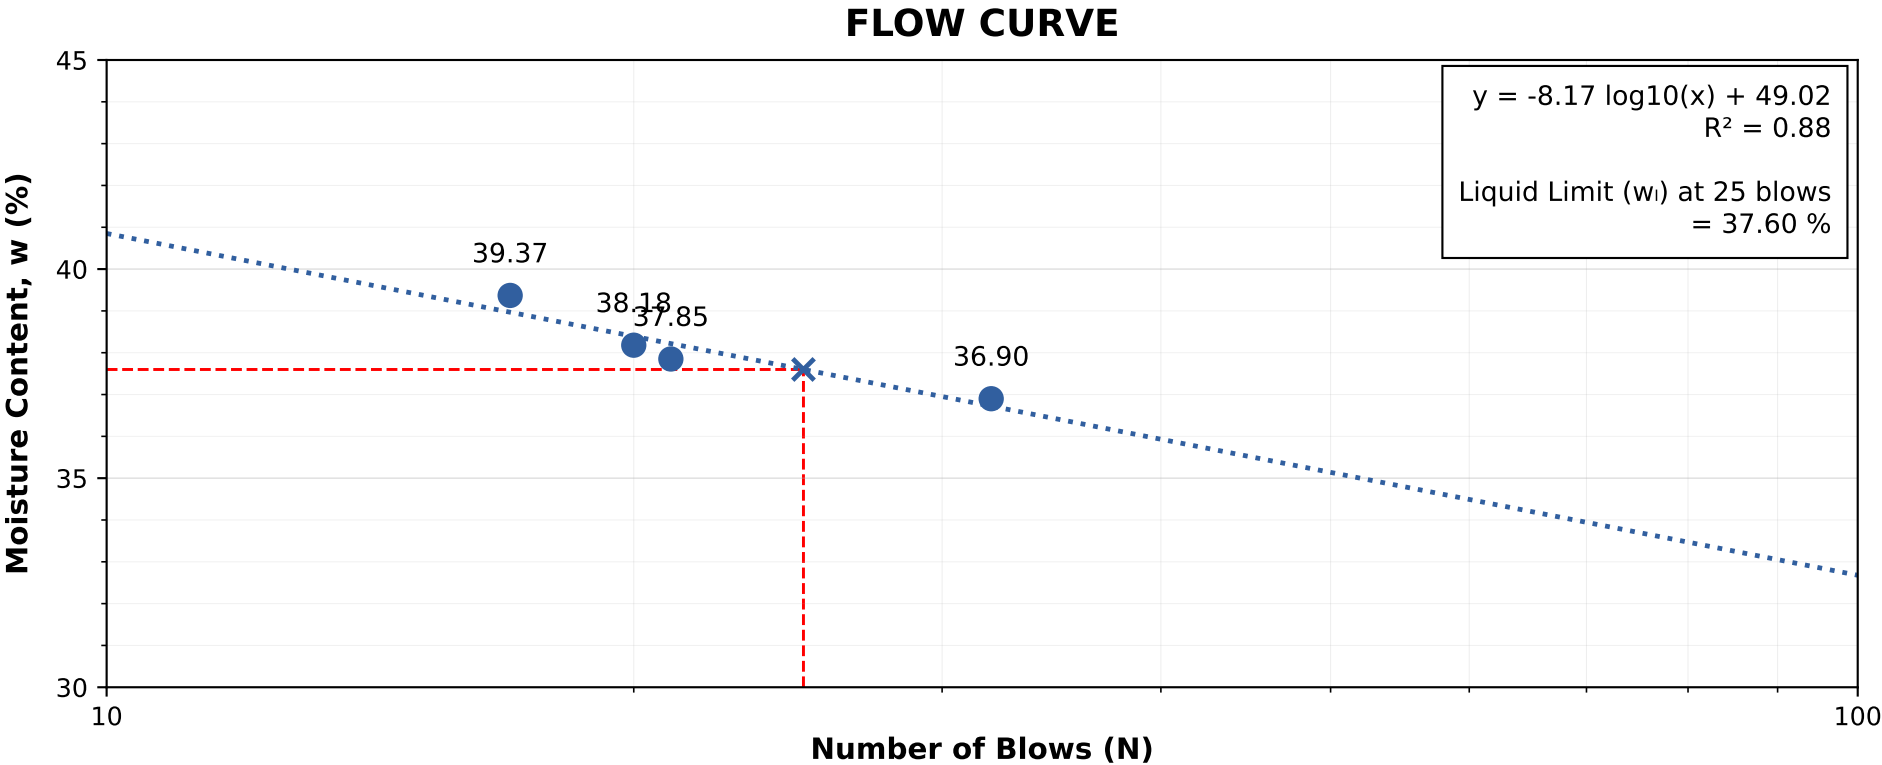

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	39.37
2	20	38.18
3	21	37.85
4	32	36.90

TEST RESULTS

Liquid Limit (w_L)	: 37.60 %
Plastic Limit (w_P)	: 17.90 %
Plasticity Index (PI)	: 19.70 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.