


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-06**
Sample Type & Sample Depth from top : **UDS & 1.50 m**

FLOW CURVE

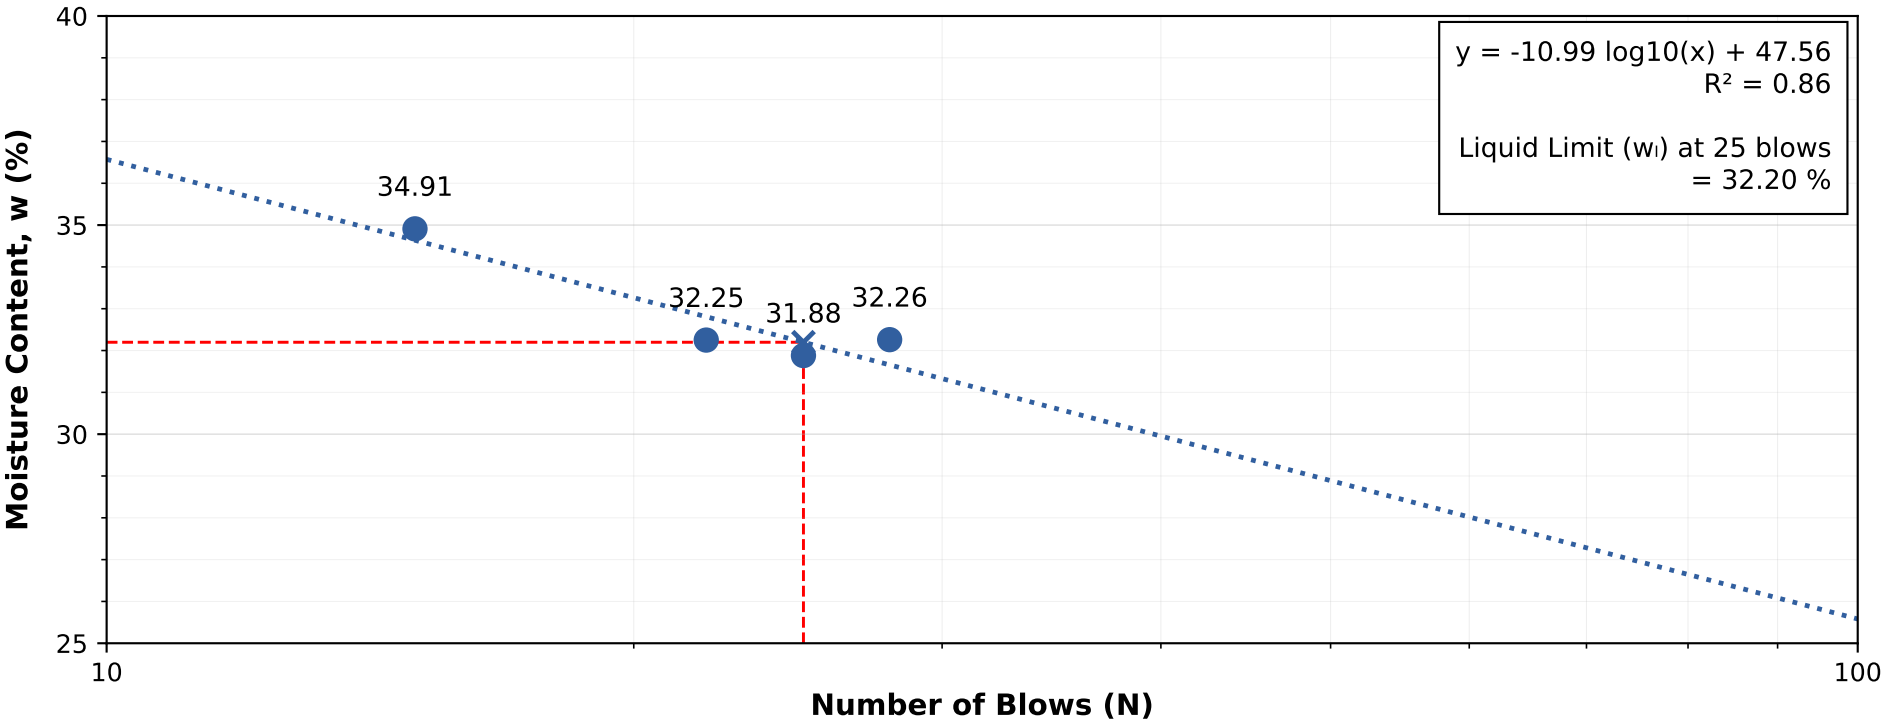

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	34.91
2	22	32.25
3	25	31.88
4	28	32.26

TEST RESULTS

Liquid Limit (w_L)	: 32.20 %
Plastic Limit (w_P)	: 15.70 %
Plasticity Index (PI)	: 16.50 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-06**
Sample Type & Sample Depth from top : **SPT & 3.50 m**

FLOW CURVE

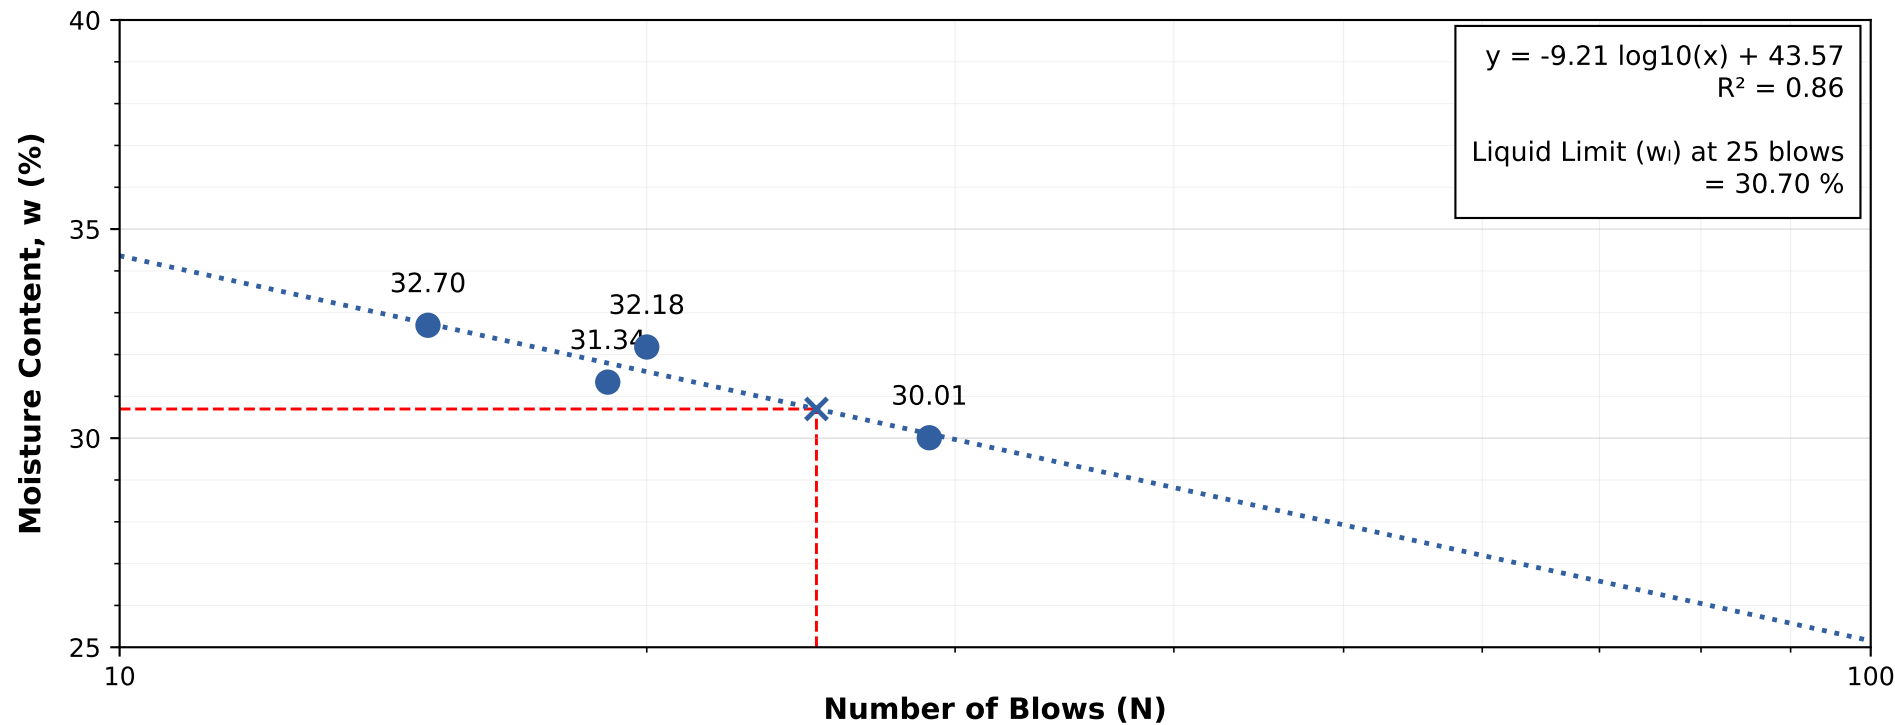

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	32.70
2	19	31.34
3	20	32.18
4	29	30.01

TEST RESULTS

Liquid Limit (w_L)	: 30.70 %
Plastic Limit (w_P)	: 15.60 %
Plasticity Index (PI)	: 15.10 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-06**
Sample Type & Sample Depth from top : **UDS & 4.50 m**

FLOW CURVE

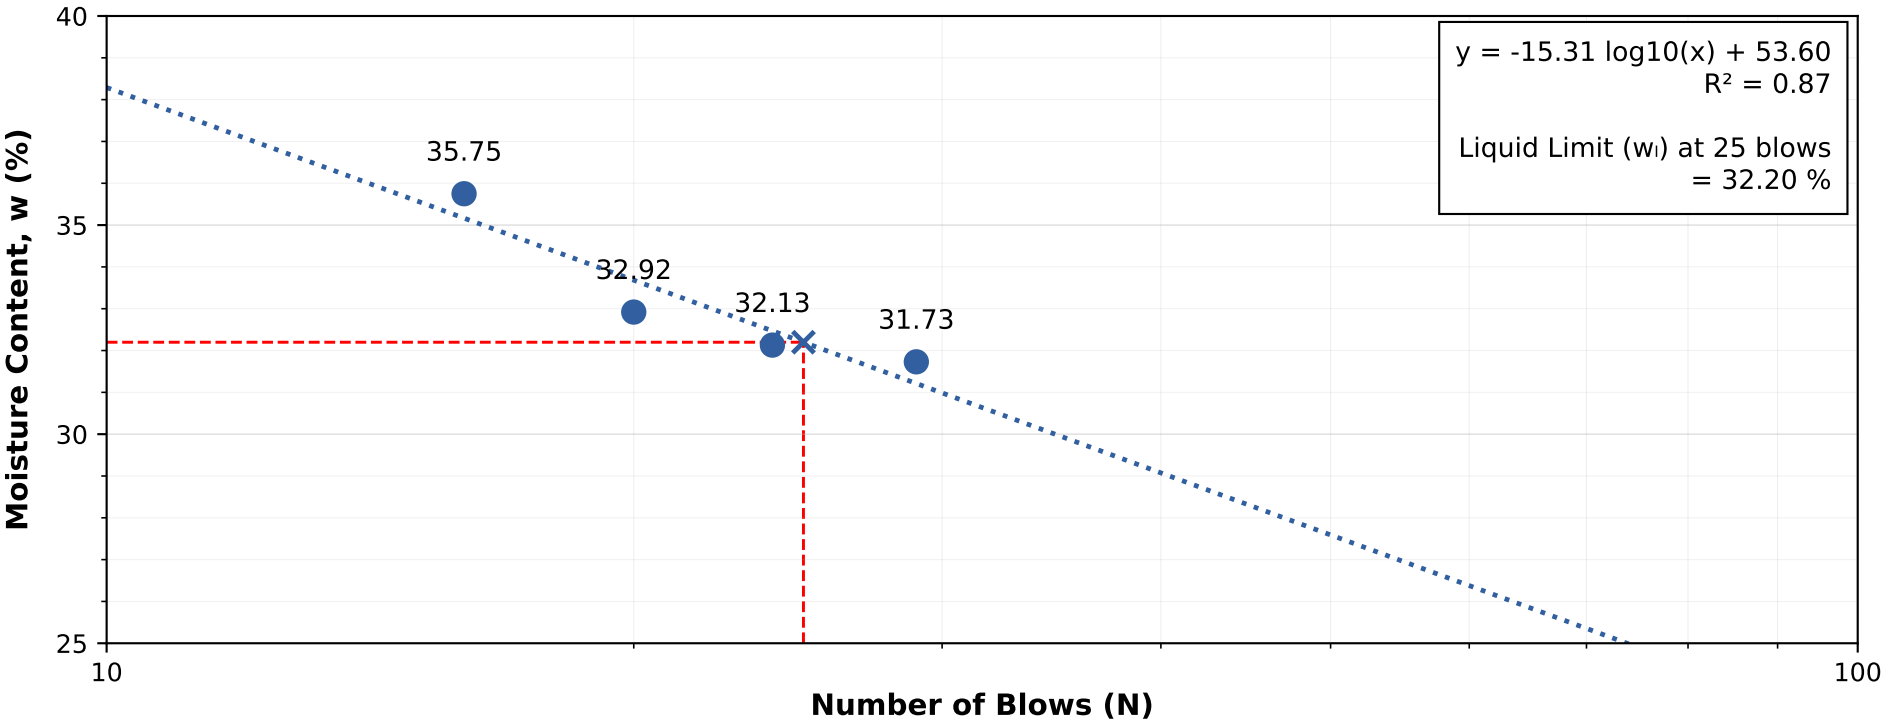

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	35.75
2	20	32.92
3	24	32.13
4	29	31.73

TEST RESULTS

Liquid Limit (w_L)	: 32.20 %
Plastic Limit (w_P)	: 17.70 %
Plasticity Index (PI)	: 14.50 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-06

Sample Type & Sample Depth from top : SPT & 6.50 m

FLOW CURVE

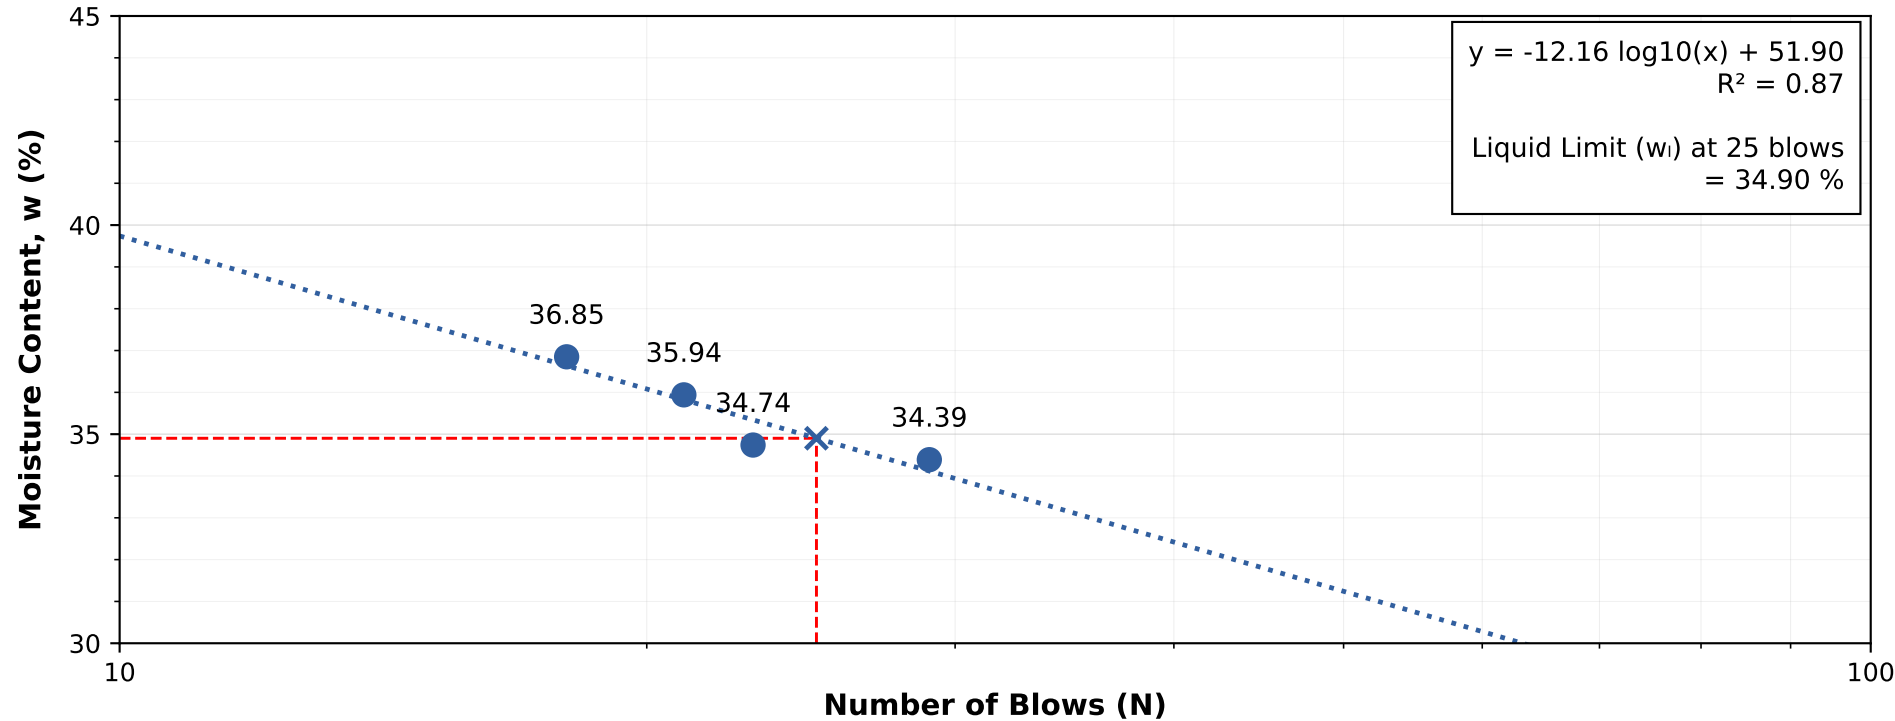

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	36.85
2	21	35.94
3	23	34.74
4	29	34.39

TEST RESULTS

Liquid Limit (w_L)	: 34.90 %
Plastic Limit (w_P)	: 16.70 %
Plasticity Index (PI)	: 18.20 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-06

Sample Type & Sample Depth from top : UDS & 7.50 m

FLOW CURVE

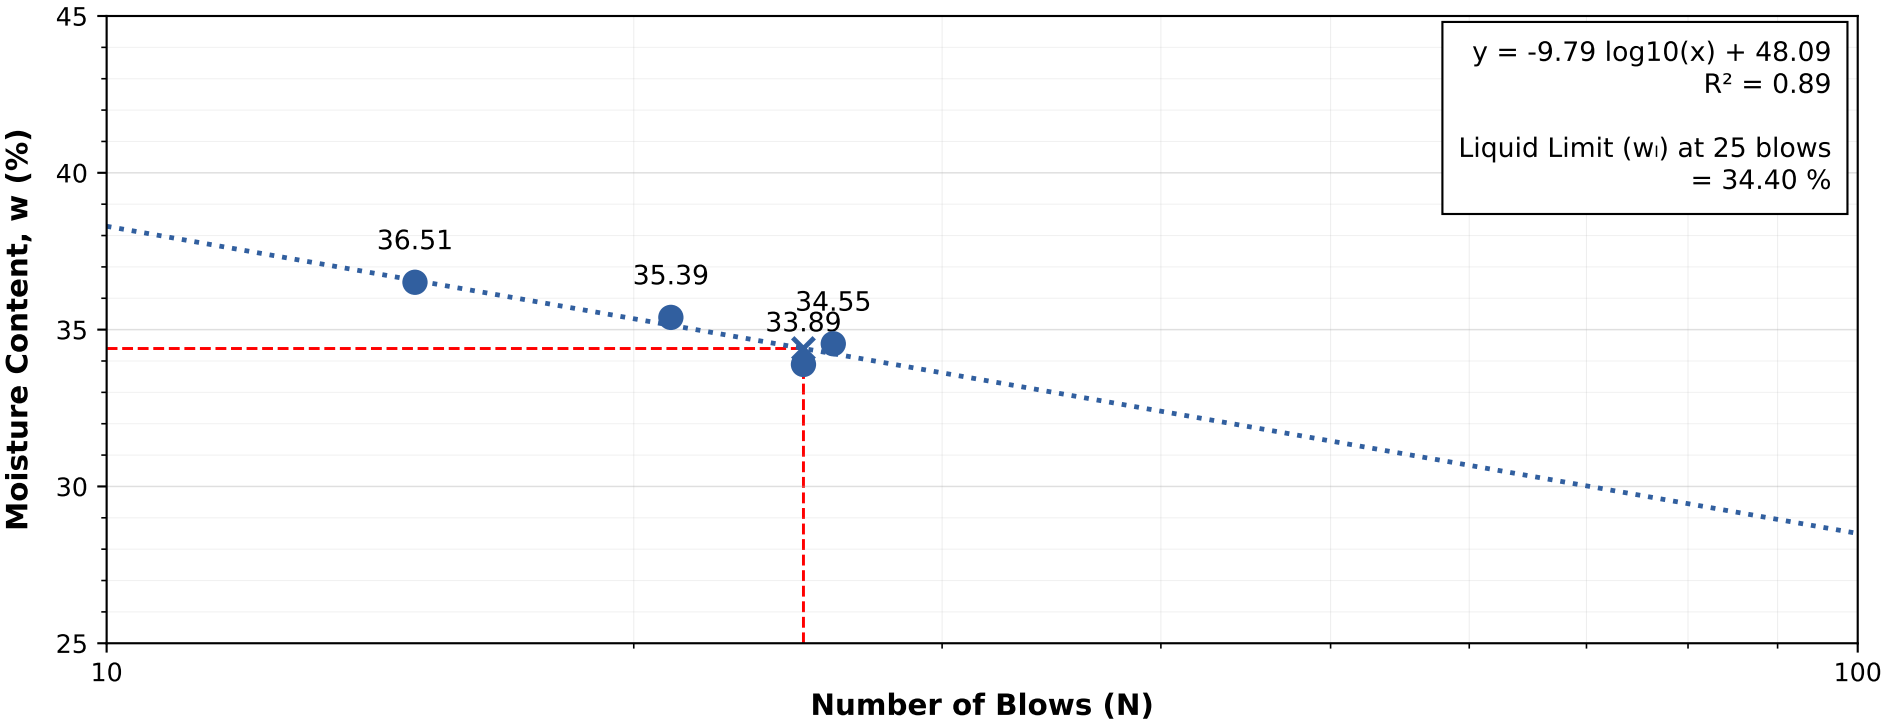

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	36.51
2	21	35.39
3	25	33.89
4	26	34.55

TEST RESULTS

Liquid Limit (w_L)	: 34.40 %
Plastic Limit (w_P)	: 17.10 %
Plasticity Index (PI)	: 17.30 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.