


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-07

Sample Type & Sample Depth from top : SPT & 0.50 m

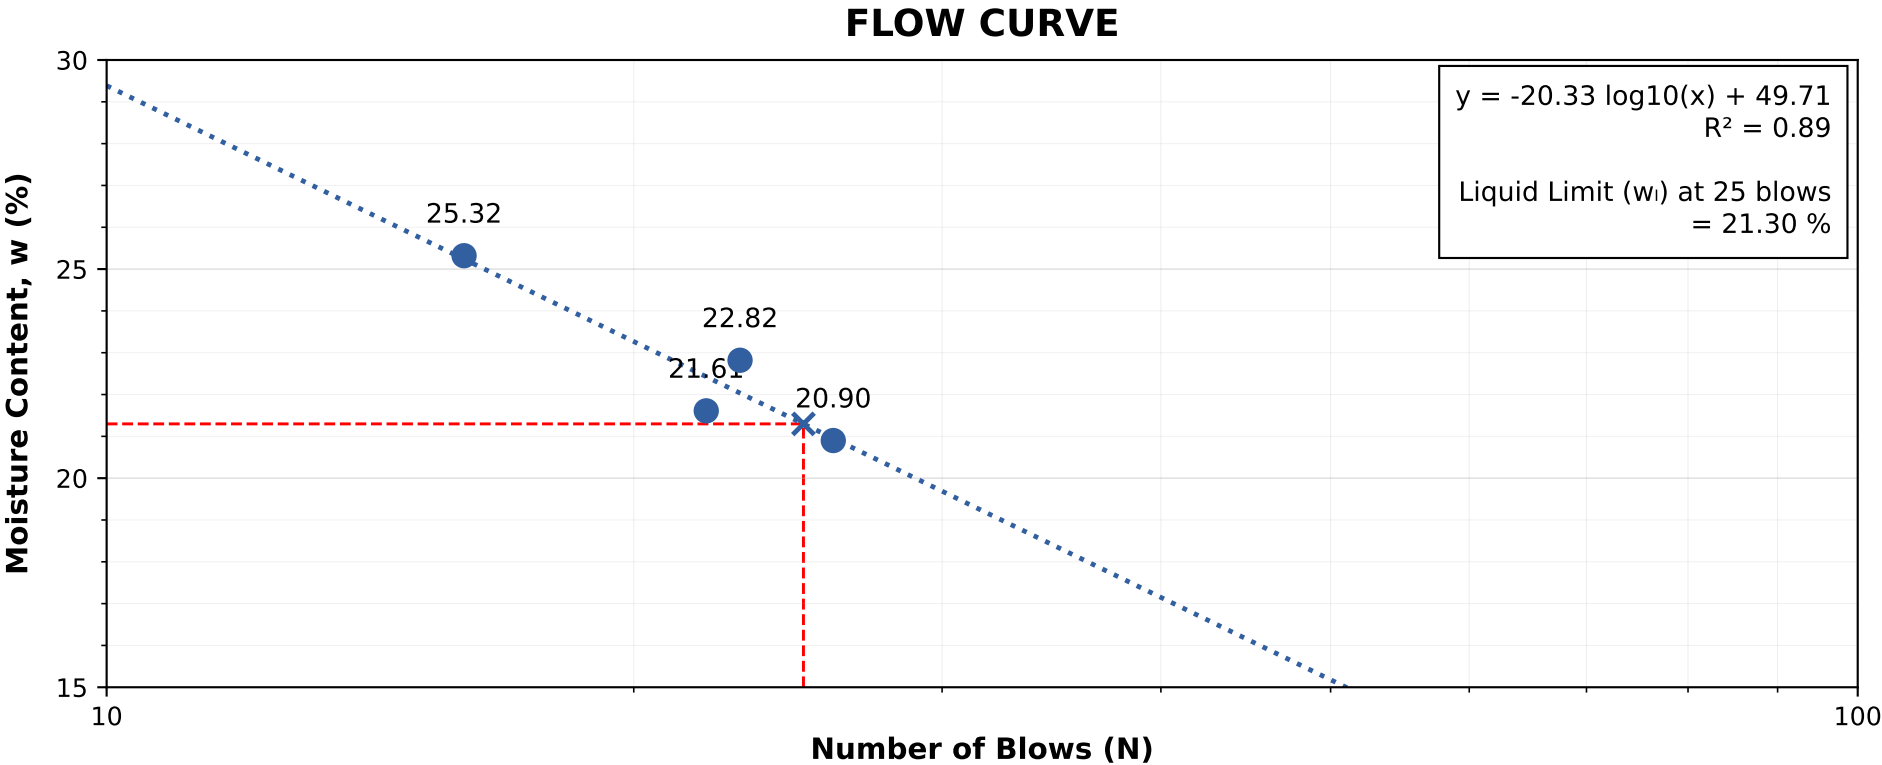

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	25.32
2	22	21.61
3	23	22.82
4	26	20.90

TEST RESULTS

Liquid Limit (w_l)	: 21.30 %
Plastic Limit (w_p)	: —
Plasticity Index (PI)	: —


Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-07**
Sample Type & Sample Depth from top : **SPT & 4.50 m**

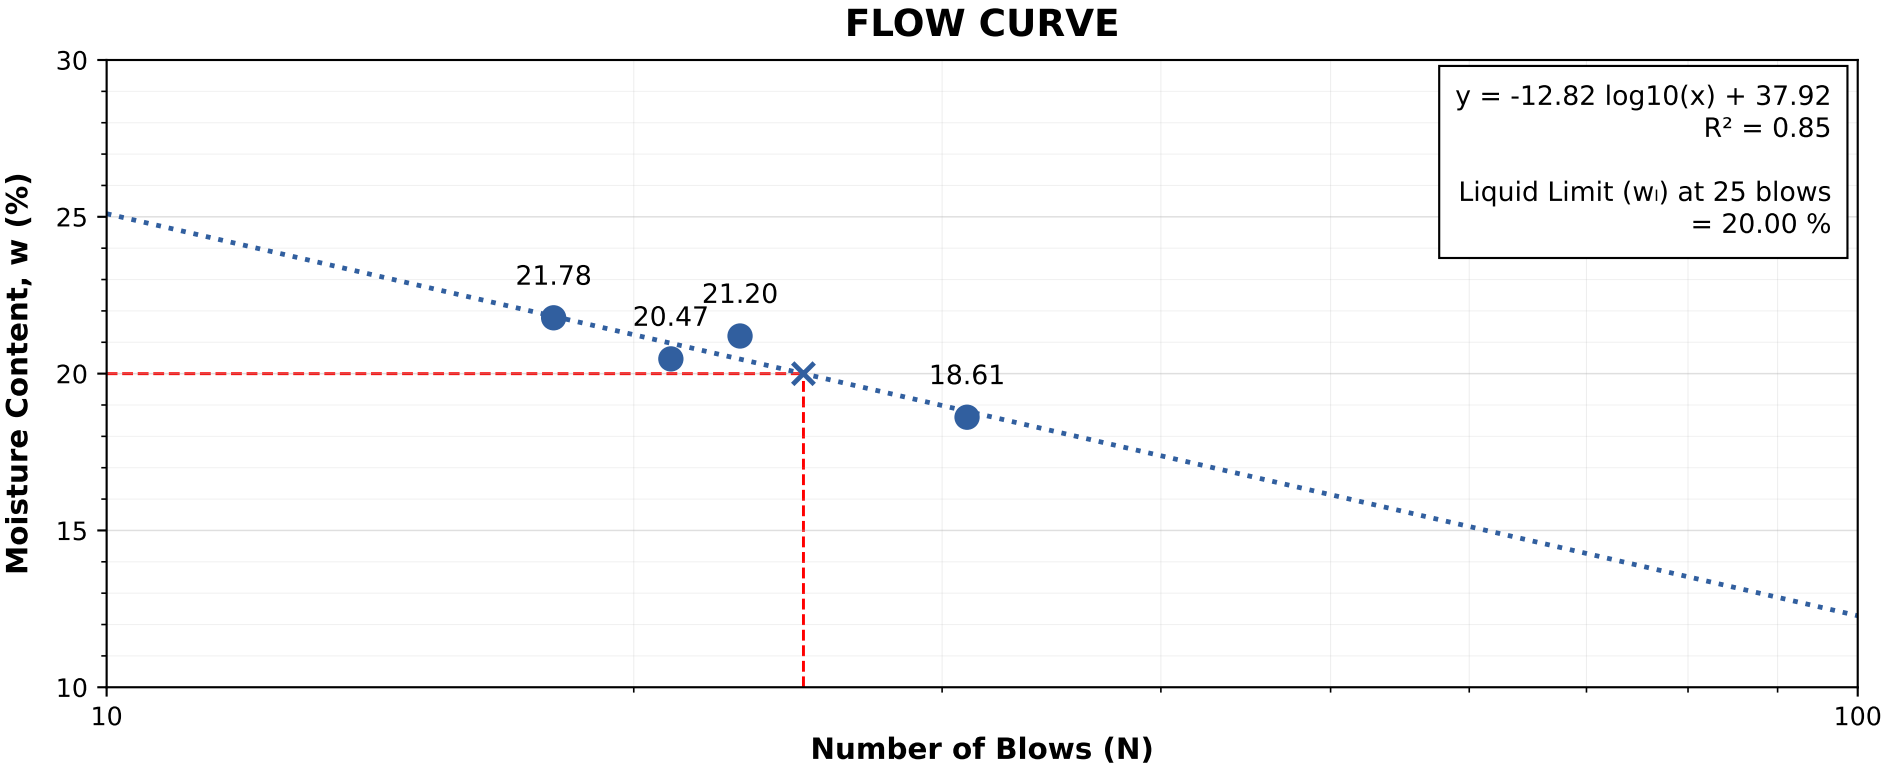

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	21.78
2	21	20.47
3	23	21.20
4	31	18.61

TEST RESULTS

Liquid Limit (w_L)	: 20.00 %
Plastic Limit (w_P)	: —
Plasticity Index (PI)	: —

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-07

Sample Type & Sample Depth from top : SPT & 10.00 m

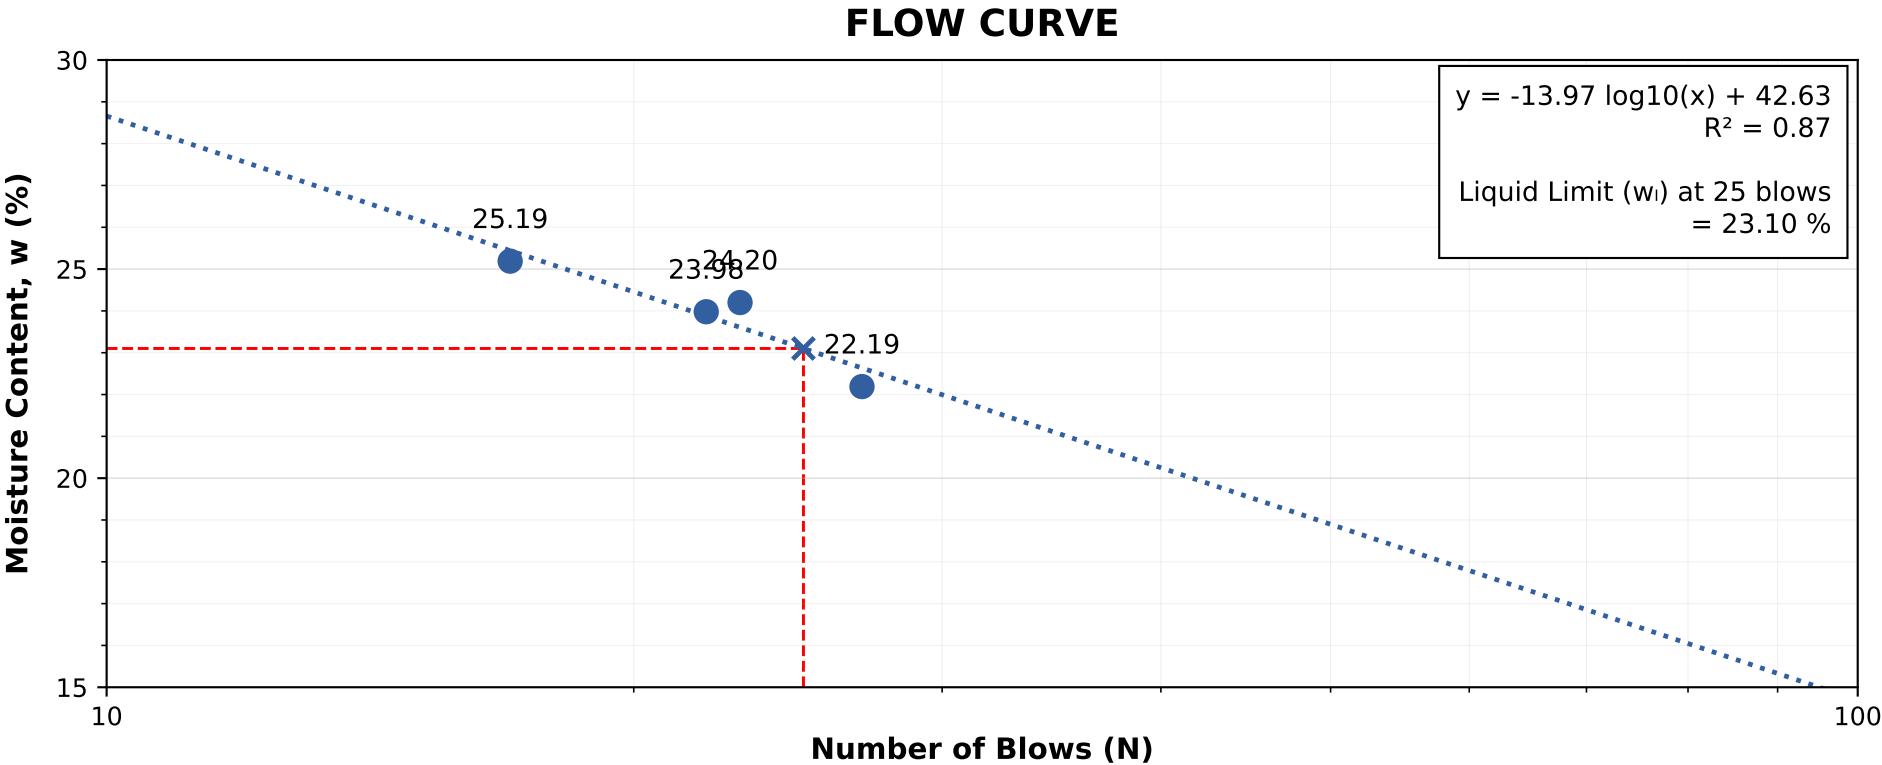

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	25.19
2	22	23.98
3	23	24.20
4	27	22.19

TEST RESULTS

Liquid Limit (w_l)	: 23.10 %
Plastic Limit (w_p)	: —
Plasticity Index (PI)	: —

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.