


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-10

Sample Type & Sample Depth from top : UDS & 1.50 m

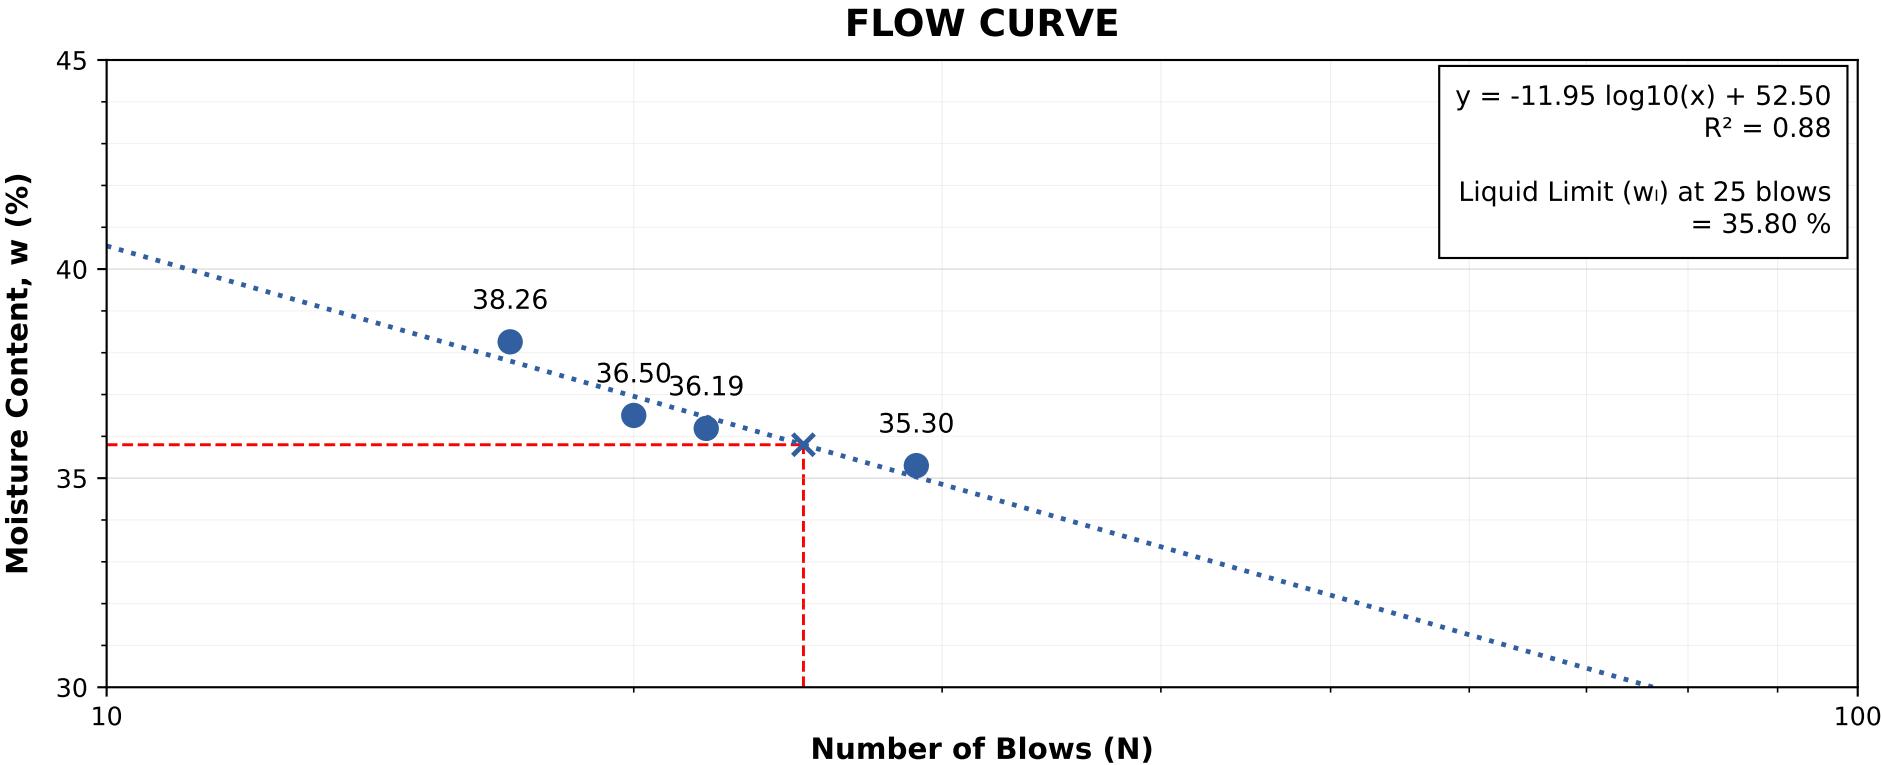

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	38.26
2	20	36.50
3	22	36.19
4	29	35.30

TEST RESULTS

Liquid Limit (w_l)	: 35.80 %
Plastic Limit (w_p)	: 17.80 %
Plasticity Index (PI)	: 18.00 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-10

Sample Type & Sample Depth from top : UDS & 4.50 m

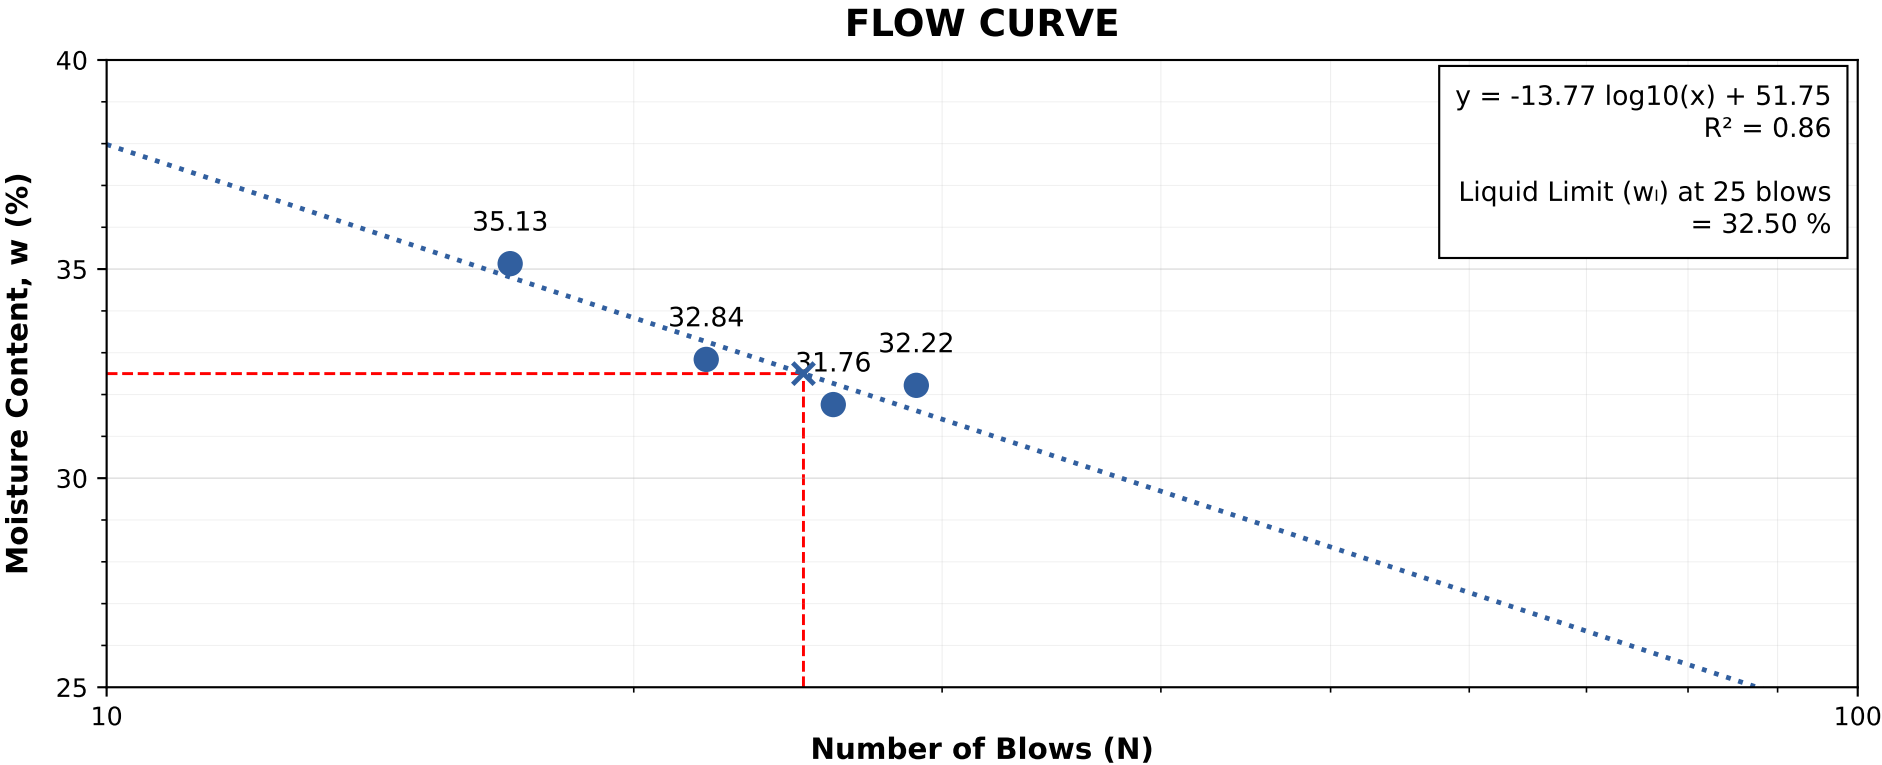

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	35.13
2	22	32.84
3	26	31.76
4	29	32.22

TEST RESULTS

Liquid Limit (w_l)	: 32.50 %
Plastic Limit (w_p)	: 15.40 %
Plasticity Index (PI)	: 17.10 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-10

Sample Type & Sample Depth from top : SPT & 6.50 m

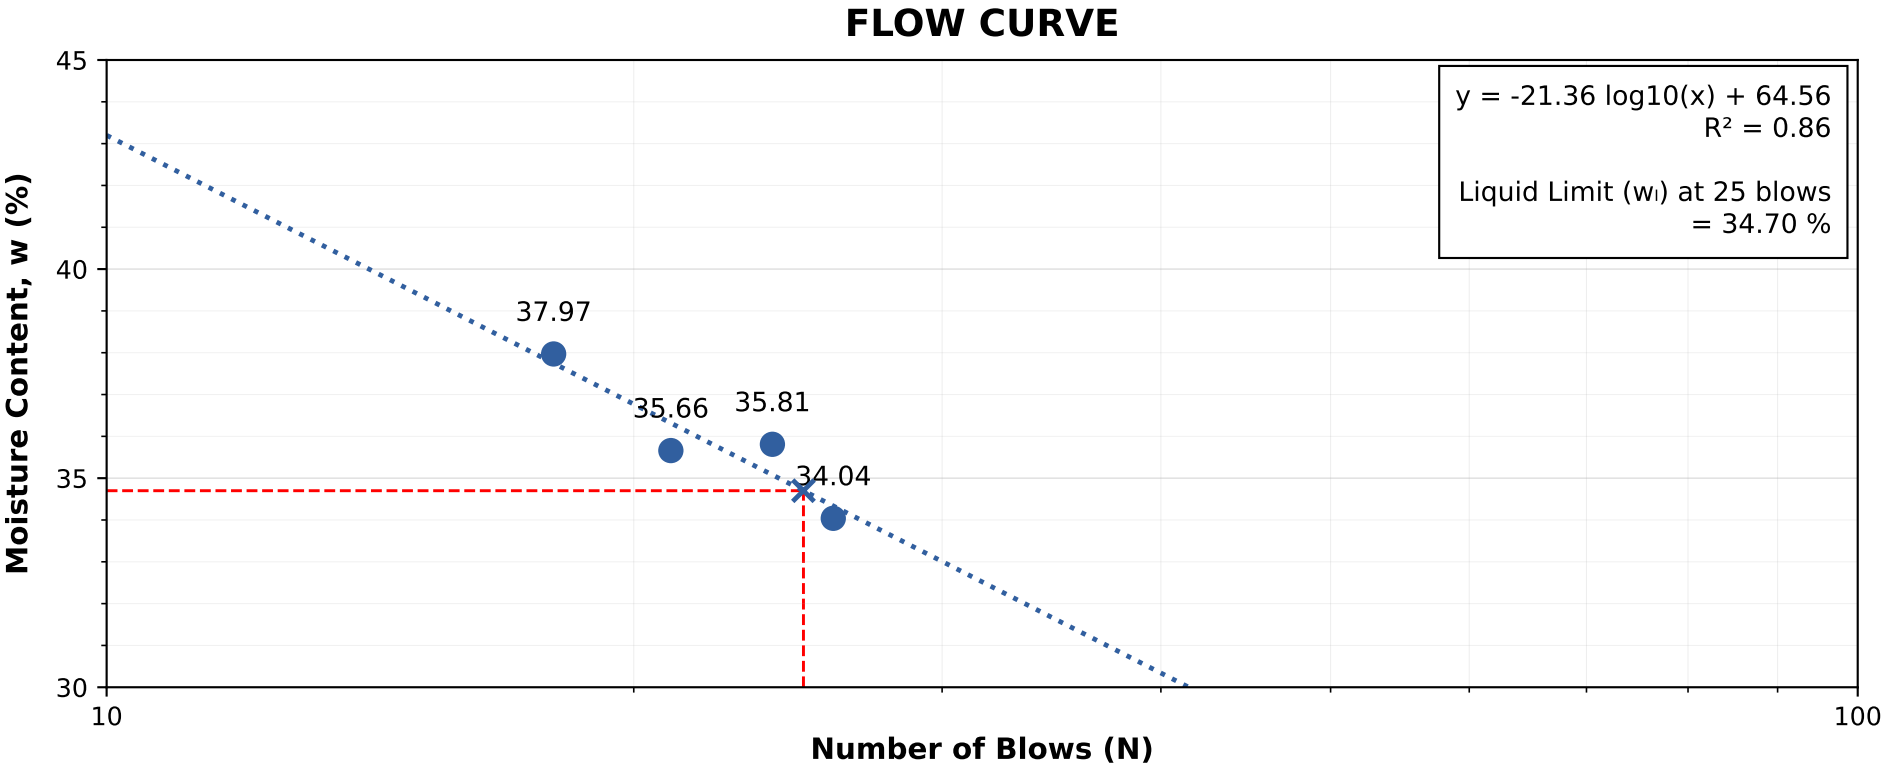

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	37.97
2	21	35.66
3	24	35.81
4	26	34.04

TEST RESULTS

Liquid Limit (w_l)	: 34.70 %
Plastic Limit (w_p)	: 17.30 %
Plasticity Index (PI)	: 17.40 %


Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-10**
Sample Type & Sample Depth from top : **SPT & 7.50 m**

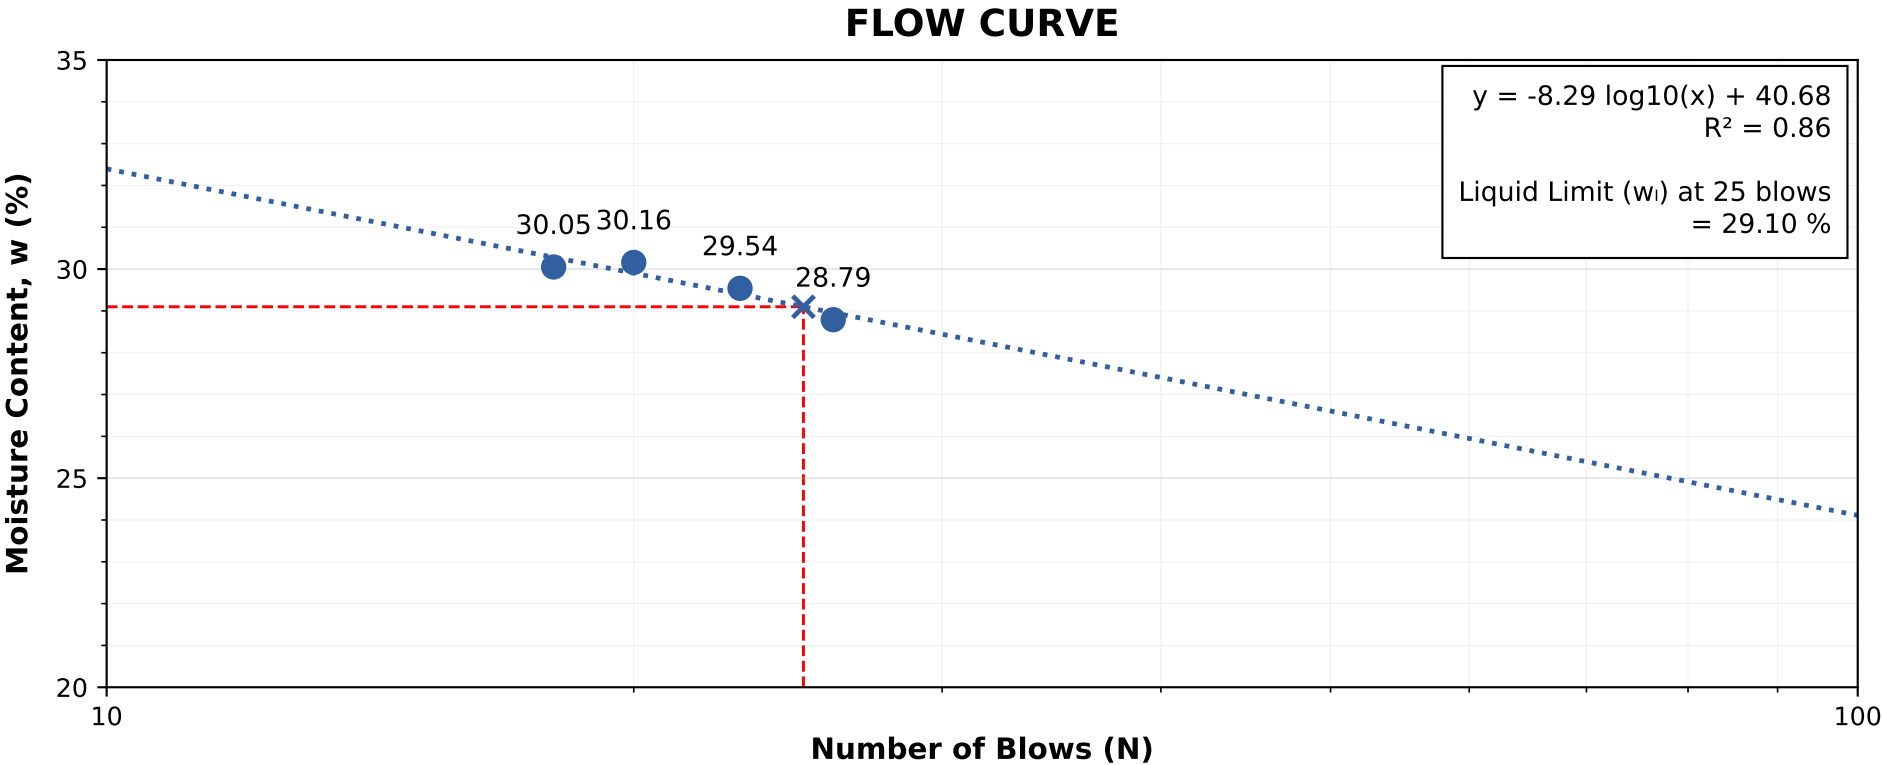

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	30.05
2	20	30.16
3	23	29.54
4	26	28.79

TEST RESULTS

Liquid Limit (w_l)	: 29.10 %
Plastic Limit (w_p)	: —
Plasticity Index (PI)	: —

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-10

Sample Type & Sample Depth from top : SPT & 10.00 m

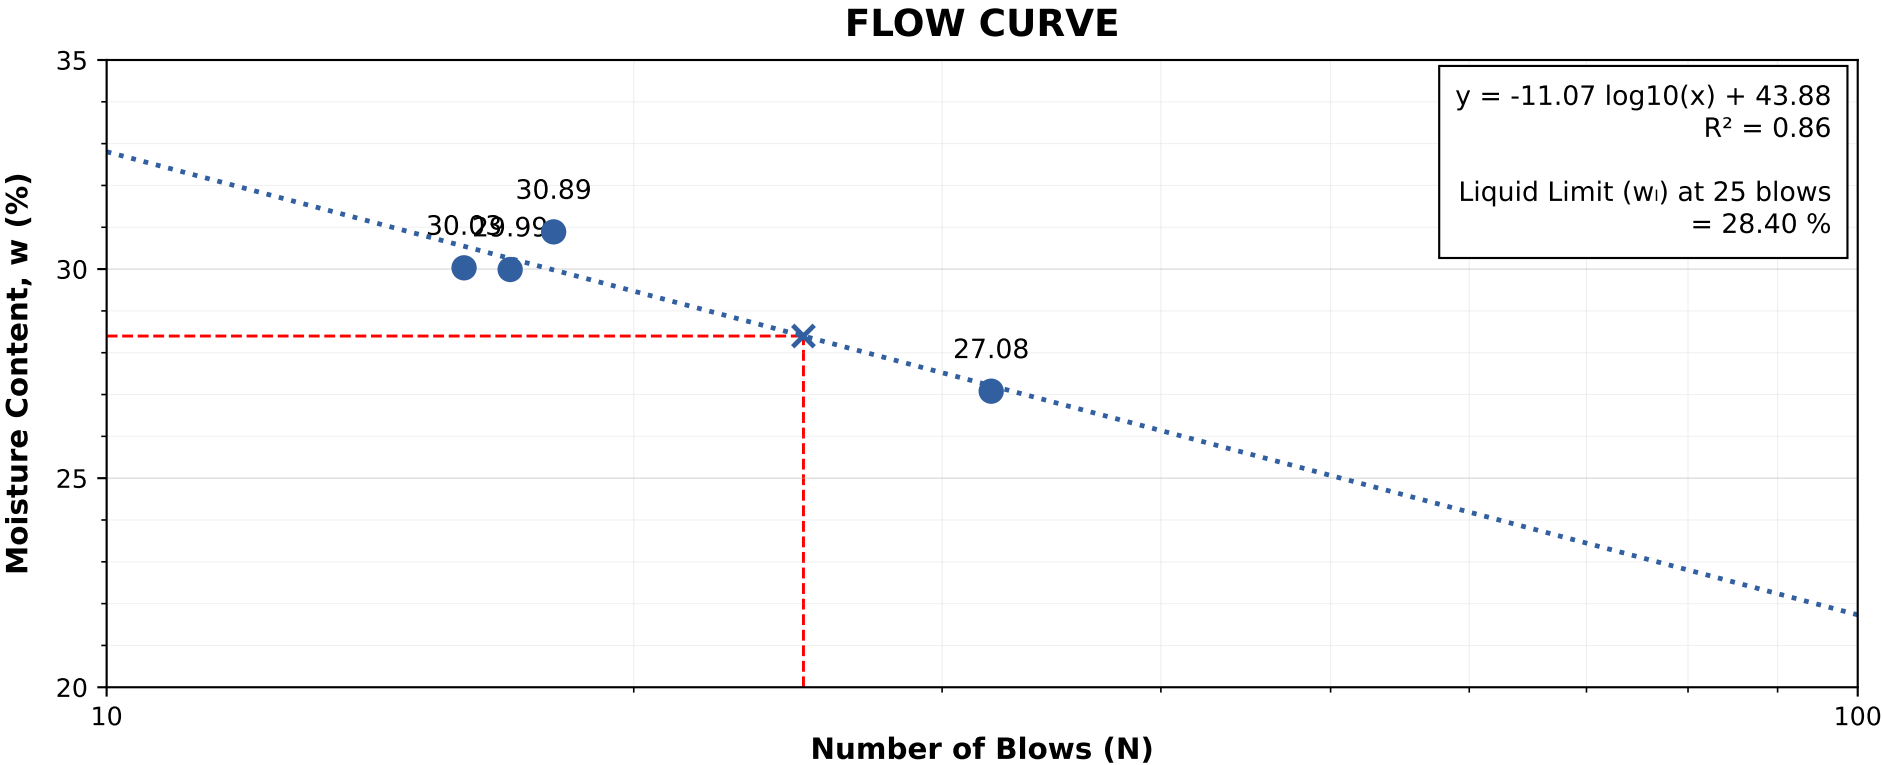

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	30.03
2	17	29.99
3	18	30.89
4	32	27.08

TEST RESULTS

Liquid Limit (w _L)	: 28.40 %
Plastic Limit (w _P)	: —
Plasticity Index (PI)	: —

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.