


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-12**

Sample Type & Sample Depth from top : **UDS & 1.50 m**

FLOW CURVE

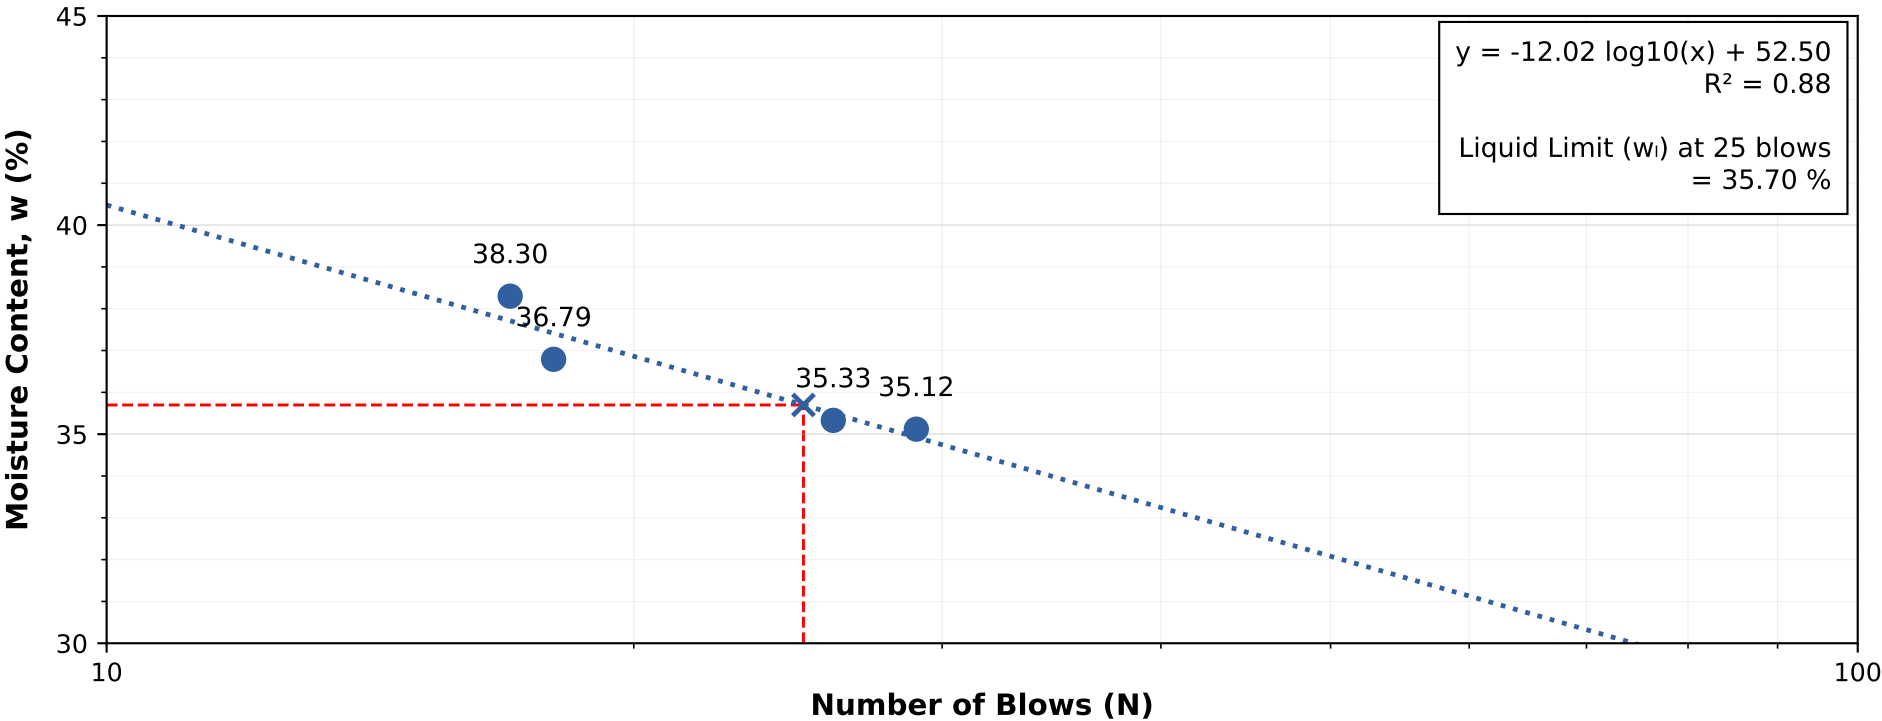

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	38.30
2	18	36.79
3	26	35.33
4	29	35.12

TEST RESULTS

Liquid Limit (w_l)	: 35.70 %
Plastic Limit (w_p)	: 15.10 %
Plasticity Index (PI)	: 20.60 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : SBH-12

Sample Type & Sample Depth from top : UDS & 4.50 m

FLOW CURVE

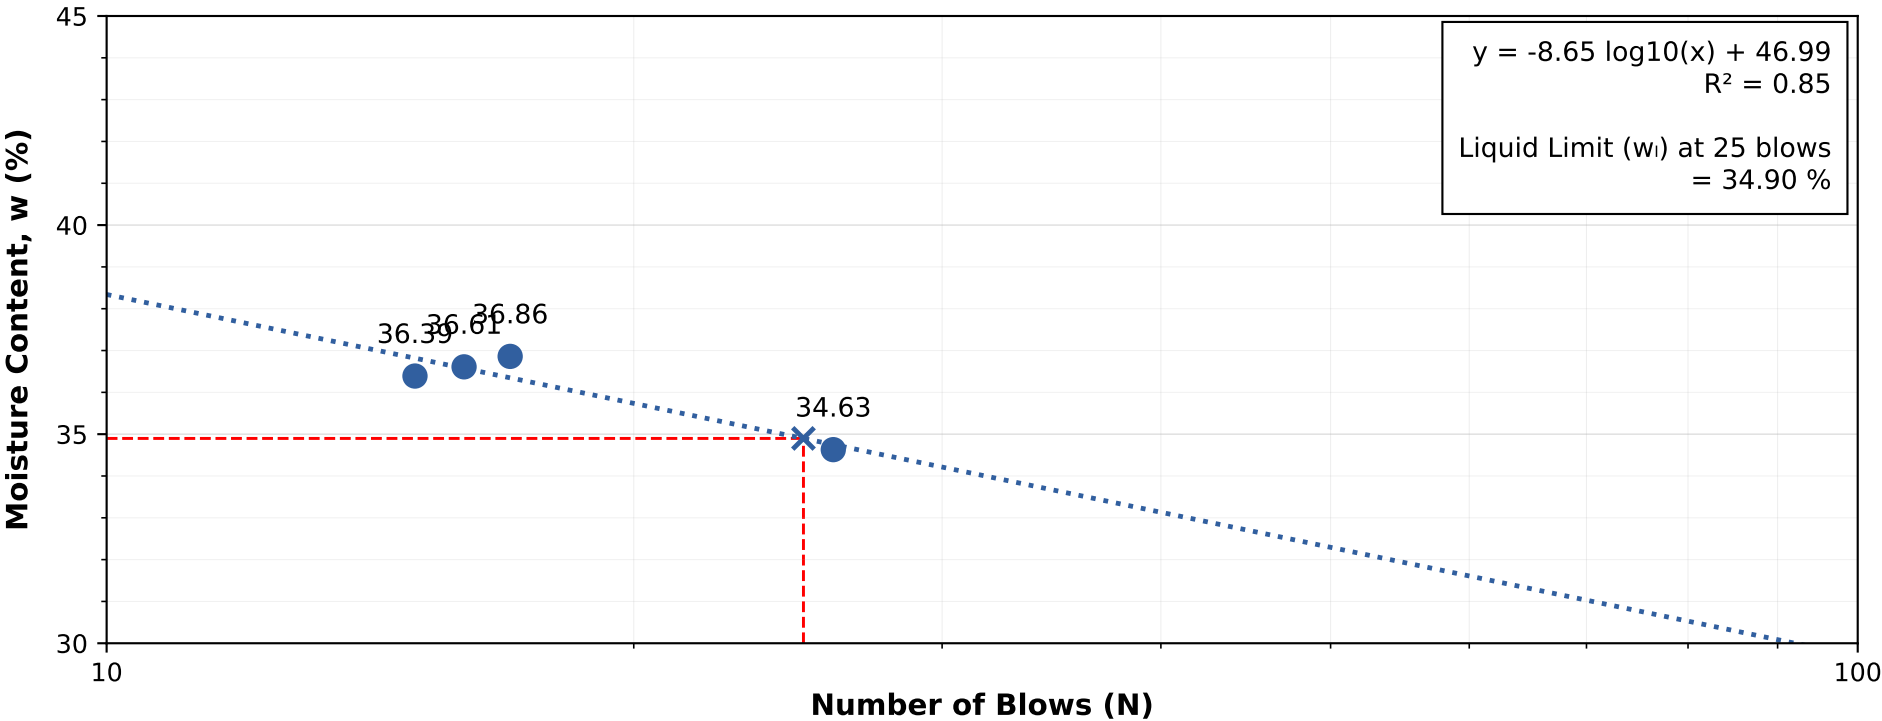

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	36.39
2	16	36.61
3	17	36.86
4	26	34.63

TEST RESULTS

Liquid Limit (w_L)	: 34.90 %
Plastic Limit (w_P)	: 16.90 %
Plasticity Index (PI)	: 18.00 %


Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : **SBH-12**
Sample Type & Sample Depth from top : **UDS & 7.50 m**

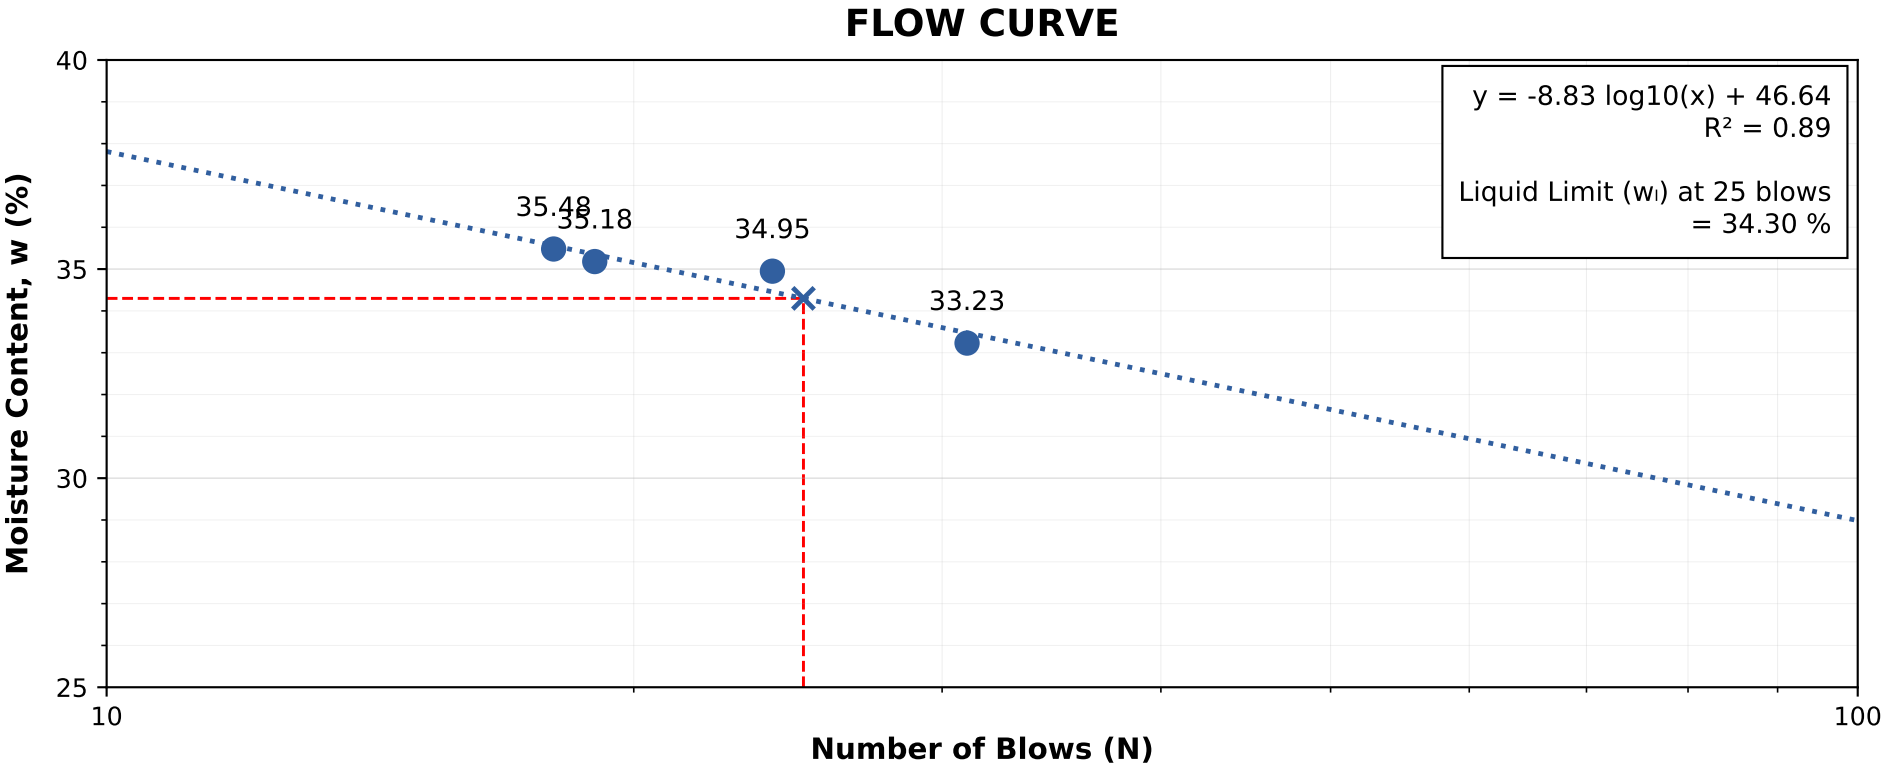

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	35.48
2	19	35.18
3	24	34.95
4	31	33.23

TEST RESULTS

Liquid Limit (w_l)	: 34.30 %
Plastic Limit (w_p)	: 17.30 %
Plasticity Index (PI)	: 17.00 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.