

Cable ID
2.3-GROB

Summary
FAIL

Test Limit
TIA Cat 5e Channel

Length
79 ft

Headroom
-14.7 dB (NEXT)

Date / Time
06/20/2023 04:02 PM

Total Length:	79 ft
Number of Reports:	1
Number of Passing Reports:	0
Number of Failing Reports:	1
Number of Warning Reports:	0
Documentation Only:	0

Cable ID: 2.3-GROß

Test Limit: TIA Cat 5e Channel

Limits Version: 1.9300

Date / Time: 06/20/2023 04:02:04 PM

Operator: A

Headroom -14.7 dB (NEXT 3,6-4,5)

Cable Type: Cat 5 FTP

NVP: 69.0%

Main: DTX CableAnalyzer

S/N: 8727070

Software Version: 2.7400

Calibration Date: 05/10/2006

Adapter: DTX-CHA001

S/N: MBGSJDF

Test Summary: FAIL

Remote: DTX CableAnalyzer

S/N: 8727069

Software Version: 2.7400

Calibration Date: 05/10/2006

Adapter: DTX-CHA001

S/N: MBG1SUS

Length (ft), Limit 328	[Pair 1,2]	79
Prop. Delay (ns), Limit 555	[Pair 4,5]	119
Delay Skew (ns), Limit 50	[Pair 4,5]	3
Resistance (ohms)	[Pair 4,5]	28.1
Insertion Loss Margin (dB)	[Pair 1,2]	-96.2 F
Frequency (MHz)	[Pair 1,2]	1.1
Limit (dB)	[Pair 1,2]	3.0


Worst Case Margin Worst Case Value

FAIL	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
NEXT (dB)	-14.2 F	-14.7 F	-10.6	-11.4
Freq. (MHz)	9.0	8.8	63.3	61.5
Limit (dB)	47.8	48.0	33.5	33.7
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	-11.2 F	-11.7 F	-7.6	-8.4
Freq. (MHz)	9.0	8.8	63.3	61.5
Limit (dB)	44.8	45.0	30.5	30.7











FAIL	MAIN	SR	MAIN	SR
Worst Pair	7,8-1,2	7,8-1,2	7,8-1,2	7,8-1,2
ACR-F (dB)	-155.3 F	-155.3 F	-154.8	-154.8
Freq. (MHz)	1.0	1.0	1.1	1.1
Limit (dB)	57.4	57.4	56.4	56.4
Worst Pair	1,2	7,8	1,2	7,8
PS ACR-F (dB)	-152.3 F	-152.3 F	-151.8	-151.8
Freq. (MHz)	1.0	1.0	1.1	1.1
Limit (dB)	54.4	54.4	53.4	53.4

N/A	MAIN	SR	MAIN	SR
Worst Pair	4,5-7,8	3,6-7,8	3,6-7,8	1,2-7,8
ACR-N (dB)	-73.1	-78.7	-60.6	-54.4
Freq. (MHz)	1.1	1.4	59.8	59.8
Limit (dB)	57.0	57.0	15.8	15.8
Worst Pair	1,2	1,2	7,8	7,8
PS ACR-N (dB)	-81.3	-80.1	-59.4	-54.5
Freq. (MHz)	1.6	1.6	59.8	59.8
Limit (dB)	53.9	53.9	12.8	12.8

FAIL	MAIN	SR	MAIN	SR
Worst Pair	4,5	4,5	4,5	3,6
RL (dB)	-0.1 *F	1.5	2.1	5.0
Freq. (MHz)	15.9	15.8	49.5	56.0
Limit (dB)	17.0	17.0	13.1	12.5



Wire Map (T568A)
FAIL

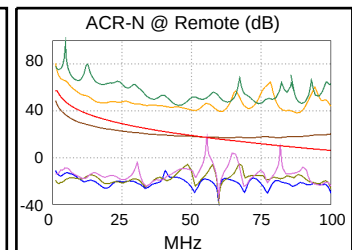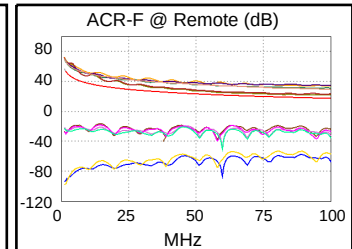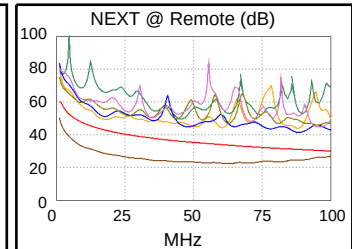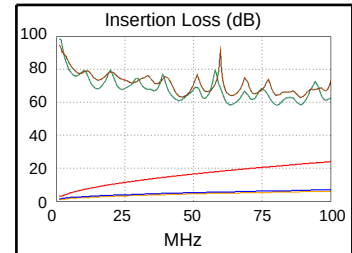

* Measurement is within the accuracy limits of the instrument.