
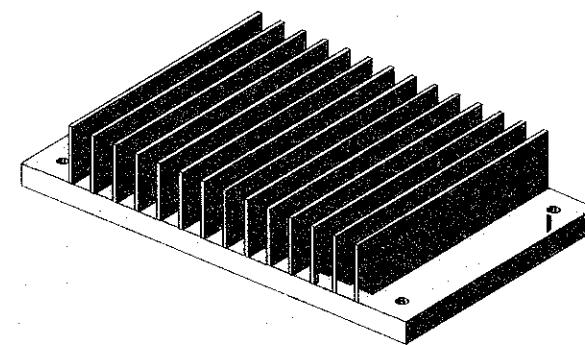
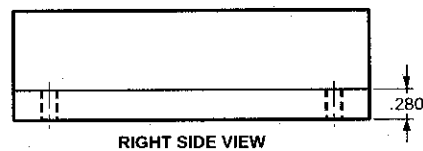
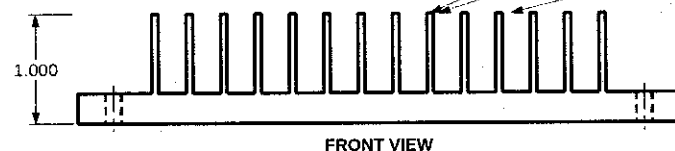


REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-09-16	F

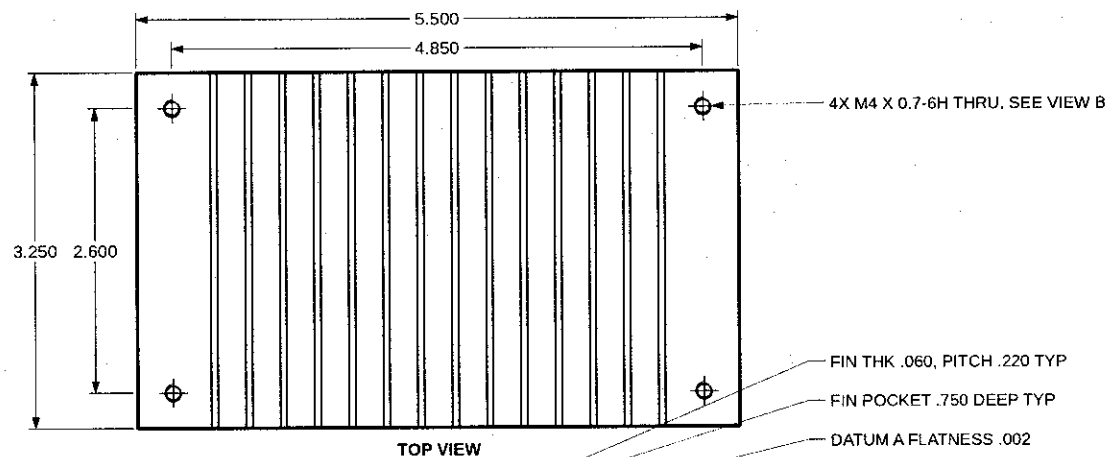


ISOMETRIC VIEW

NOTES:

1. INTERPRET DRAWING PER ASME Y14.5-2018.
2. THERMAL INTERFACE FACE (DATUM A) FLAT WITHIN .002, 32 Ra MAX. MASK THIS FACE FROM ANODIZE.
3. FIN POCKETS MAY BE MACHINED WITH ANY CUTTER RADIUS UP TO .030 AT FLOOR.
4. FIN THICKNESS .060 MIN AFTER DEBURR. NO BENT OR CRACKED FINS.
5. BREAK ALL SHARP EDGES .005-.010. FIN TIPS MAY BE LEFT SHARP.
6. INK MARK P/N AND REV ON SIDE FACE AFTER ANODIZE.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ± .01
.XXX ± .005
ANGLES ± 0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



FERROVIA ROBOTICS

TITLE

HEAT SINK PLATE, SERVO DRIVE

MATERIAL

ALUMINUM 6063-T6 PER ASTM B221

FINISH

CLEAR ANODIZE PER MIL-A-8625 TYPE II CLASS 1

SIZE

DWG NO.

REV

A

FR-2290

A

DRAWN

DATE

SCALE

SHEET

L. FISCHER

2026-09-16

1:1

1 OF 1