
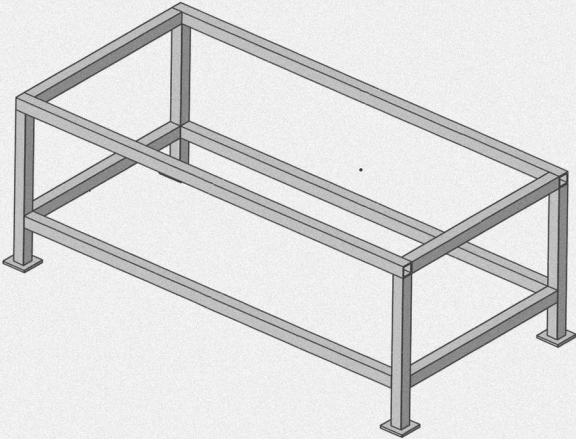


REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-05-26	C
B	MACHINE PLATE AFTER WELD, TOLERANCE CHANGE	2026-09-08	C

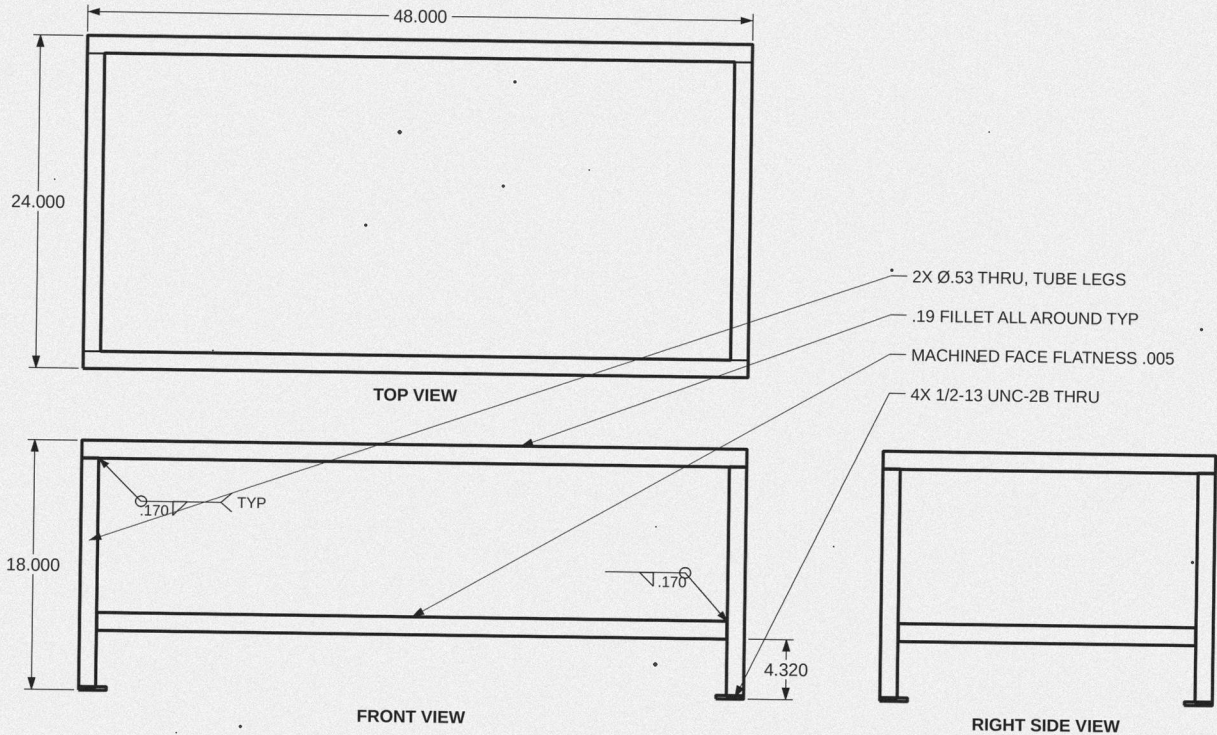


ISOMETRIC VIEW

ALL WELDS PER AWS D1.1. GRIND WELDS FLUSH WHERE NOTED.

- NOTES:**
- WELD PER AWS D1.1 USING GMAW (MIG). ALL WELDS .19 FILLET ALL AROUND UNLESS NOTED.
 - MACHINE TOP FACE OF MOUNTING PLATE AFTER WELDING. FLATNESS .005 OVER FULL FACE.
 - DRILL AND TAP MOUNTING PLATE HOLES AFTER WELDING, LOCATED FROM MACHINED FACE.
 - REMOVE ALL WELD SPATTER, SLAG, AND SHARP EDGES BEFORE COATING.
 - FRAME DIAGONALS TO MATCH WITHIN .12 BEFORE WELD-OUT.
 - PLUG ALL OPEN TUBE ENDS WITH PLASTIC CAPS AFTER COATING.
 - MASK MACHINED FACE AND TAPPED HOLES BEFORE POWDER COAT. COLOR RAL 6018 YELLOW GREEN.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
WELDMENT .X ±.06
.XX ±.03
MACHINED .XXX ±.005
ANGLES ±1°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

ARCWRIGHT AGRICULTURE			
TITLE			
FRAME ASSY, SEED METER MOUNT, WELDED			
MATERIAL			
STEEL, ASTM A36: 2 X 2 X .188 SQ TUBE, .50 PLATE			
FINISH			
POWDER COAT RAL 6018, 2-4 MILS, AFTER MACHINING			
SIZE	DWG NO.	REV	
A	AW-310	B	
DRAWN	DATE	SCALE	SHEET
I. CHEN	2026-09-08	1:8	1 OF 3