
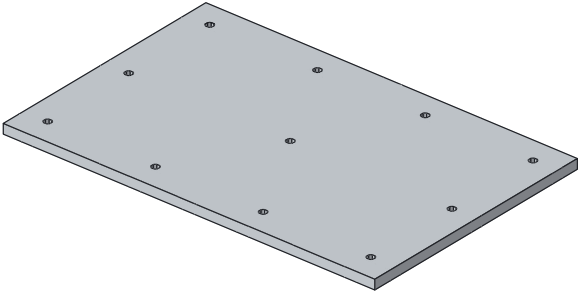
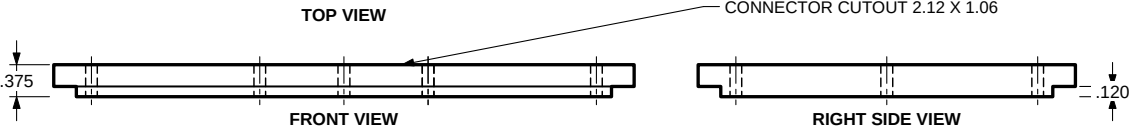


REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-08-18	V

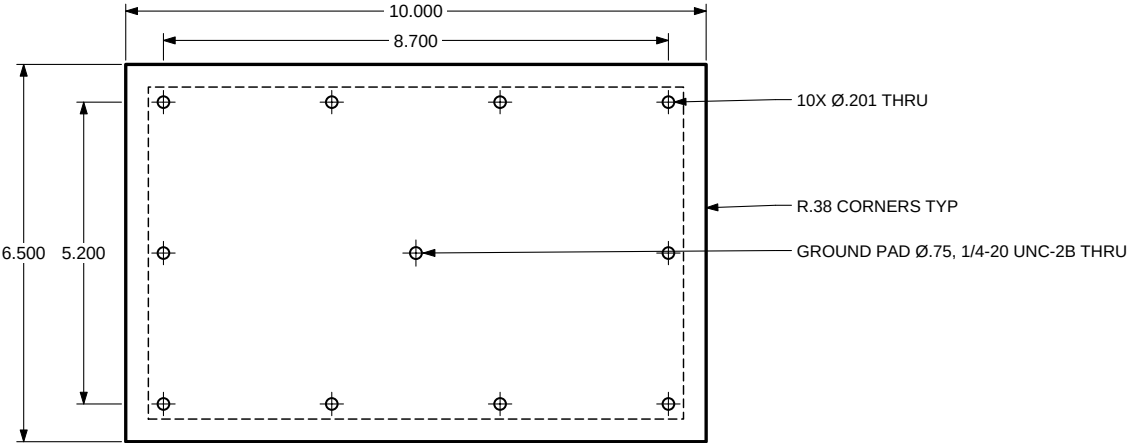

ISOMETRIC VIEW

- NOTES:**
1. INTERPRET DRAWING PER ASME Y14.5-2018.
 2. MACHINE TOP AND BOTTOM FACES. FLATNESS .005 OVERALL.
 3. CONNECTOR CUTOUT CORNERS R.062 MAX.
 4. BREAK ALL SHARP EDGES .005-.015.
 5. MASK GROUND PAD FROM ANY TOUCH-UP. PAD MUST BE ELECTRICALLY CONDUCTIVE.
 6. INK STAMP P/N AND REV ON INSIDE FACE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .XX ±.01 .XXX ±.005 ANGLES ±0.5° INTERPRET PER ASME Y14.5-2018 BREAK SHARP EDGES DO NOT SCALE DRAWING THIRD ANGLE PROJECTION	FERROVIA ROBOTICS			
	TITLE COVER, POWER DISTRIBUTION ENCLOSURE			
	MATERIAL ALUMINUM 6061-T6 PER AMS-QQ-A-250/11			
	FINISH CHEM FILM PER MIL-DTL-5541 TYPE II CLASS 3, CLEAR			
	SIZE A	DWG NO. FR-3103	REV A	
DRAWN S. VOSS	DATE 2026-08-18	SCALE 1:2	SHEET 1 OF 1	