




REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-09-16	TW

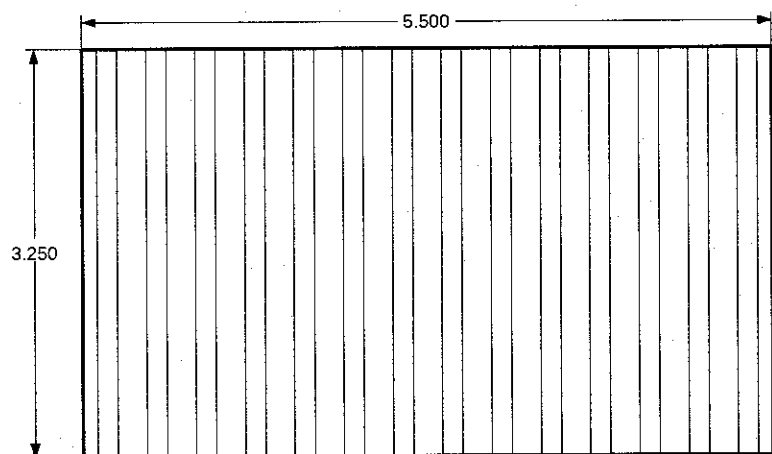

TOP VIEW



FRONT VIEW

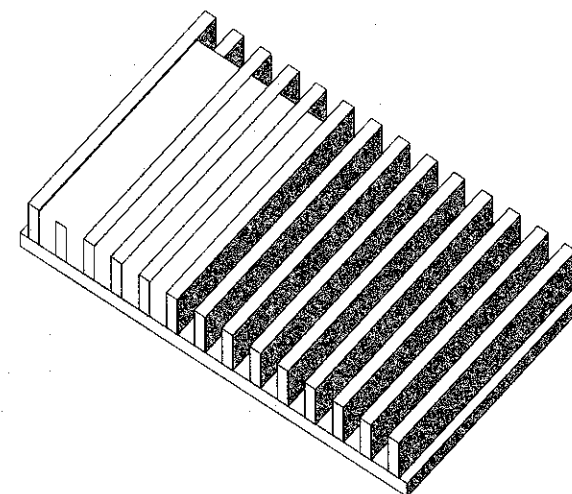

ISOMETRIC VIEW

- FIN THK .060, PITCH .220 TYP
- FIN POCKET .750 DEEP TYP
- 4X M4 X 0.7-6H THRU; SEE VIEW B
- DATUM A FLATNESS .002

NOTES:

- INTERPRET DRAWING PER ASME Y14.5-2018.
- THERMAL INTERFACE FACE (DATUM A) FLAT WITHIN .002, 32 Ra MAX. MASK THIS FACE FROM ANODIZE.
- FIN POCKETS MAY BE MACHINED WITH ANY CUTTER RADIUS UP TO .030 AT FLOOR.
- FIN THICKNESS .060 MIN AFTER DEBURR. NO BENT OR CRACKED FIN.
- BREAK ALL SHARP EDGES .005-.010. FIN TIPS MAY BE LEFT SHARP.
- INK MARK P/N AND REV ON SIDE FACE AFTER ANODIZE.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



FERROVIA ROBOTICS

TITLE HEAT SINK PLATE, SERVO DRIVE			
MATERIAL ALUMINUM 6063-T6 PER ASTM B221			
FINISH CLEAR ANODIZE PER MIL-A-8625 TYPE II CLASS 1			
SIZE A	DWG NO. FR-2290	REV A	
DRAWN L. FISCHER	DATE 2026-09-16	SCALE 1:1	SHEET 1 OF 1