


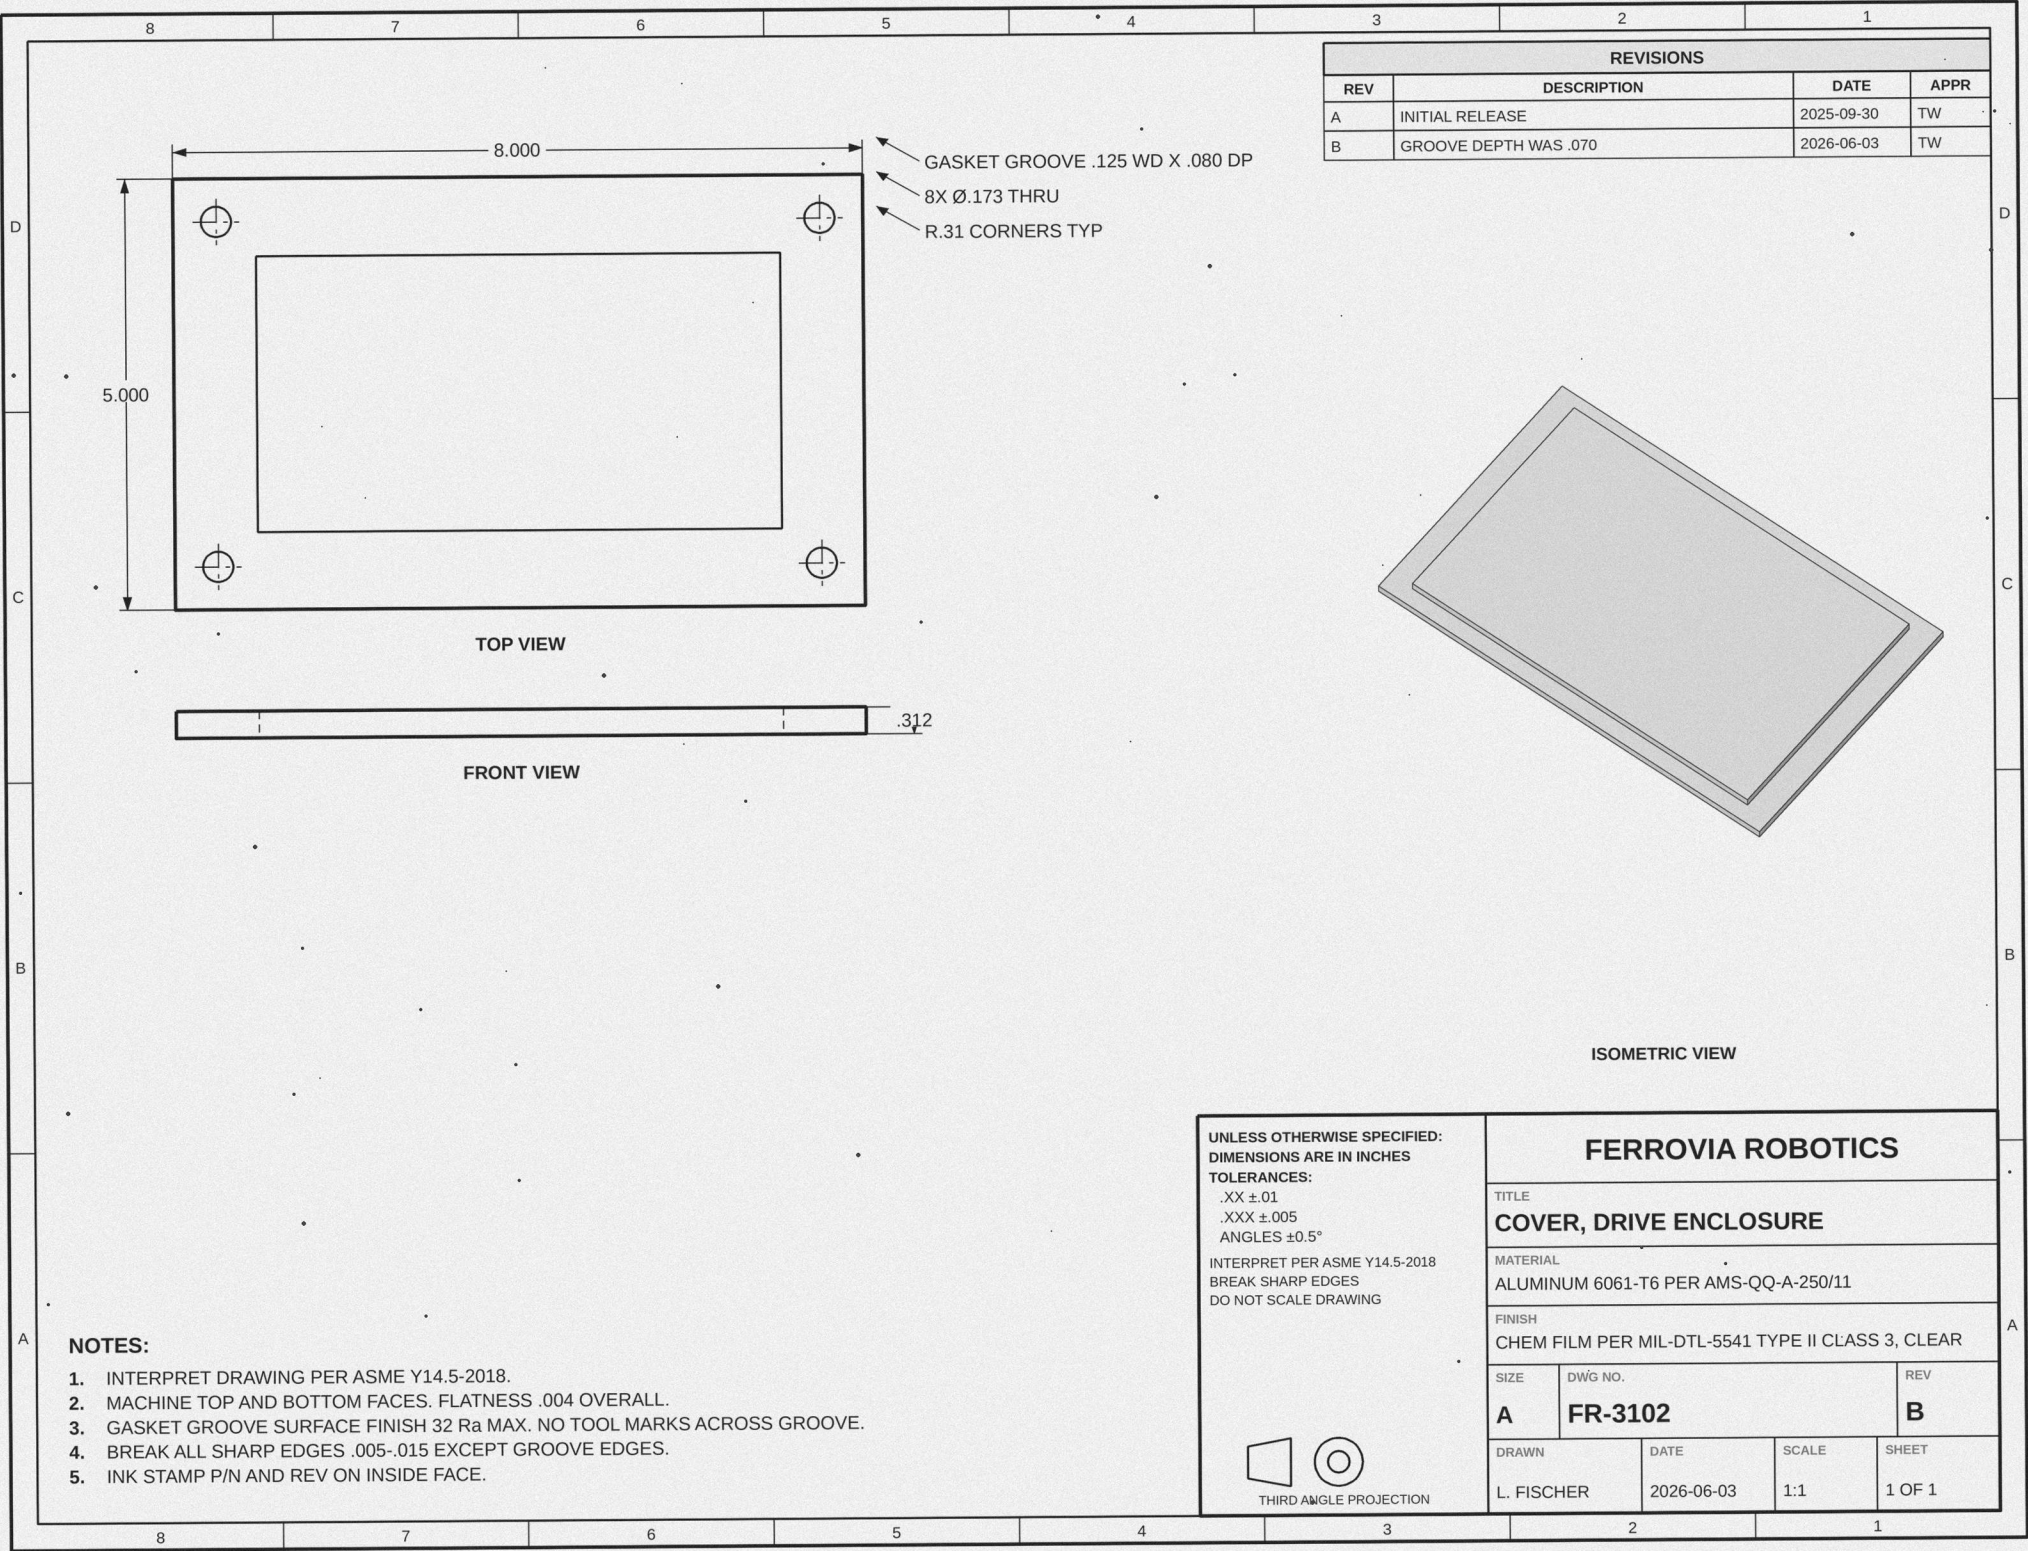

REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-09-30	TW
B	GROOVE DEPTH WAS .070	2026-06-03	TW

NOTES:

- INTERPRET DRAWING PER ASME Y14.5-2018.
- MACHINE TOP AND BOTTOM FACES. FLATNESS .004 OVERALL.
- GASKET GROOVE SURFACE FINISH 32 Ra MAX. NO TOOL MARKS ACROSS GROOVE.
- BREAK ALL SHARP EDGES .005-.015 EXCEPT GROOVE EDGES.
- INK STAMP P/N AND REV ON INSIDE FACE.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES

TOLERANCES:

.XX ±.01
.XXX ±.005
ANGLES ±0.5°

INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

FERROVIA ROBOTICS

TITLE

COVER, DRIVE ENCLOSURE

MATERIAL

ALUMINUM 6061-T6 PER AMS-QQ-A-250/11

FINISH

CHEM FILM PER MIL-DTL-5541 TYPE II CLASS 3, CLEAR

SIZE

A

DWG NO.

FR-3102

REV

B

DRAWN

L. FISCHER

DATE

2026-06-03

SCALE

1:1

SHEET

1 OF 1