


Comment	Description	Designator	Footprint	LcshRef	Quantity
0.1 µF	CAP,CERM 0.1UF/0.3V 0505/1812	C1, C3, C4, C5, C6, C9, C25, C19, C27, C29, C30, C38	CAP-0402_1005	8850123129001	12
22 µF	0805 X5R 22UF20% 6V, 0805 X7T 22UF20%,5V	C2, C10, C11	CAP-0805_2012	CMCL05F226KE6AT, 8855672208AT2A	3
10 µF	CAP0805 X7S 10UF 10%6.3V	C7, C13, C14, C21, C28	CAP-0805_2012	GMC21X7S106K6R6NT	5
10 µF	CAP ALUM 10UF 20% 16V SMD	C9	CAP-ALSMD-6.3MM H5.4MM	UWX1C100MCL1GB	1
75 pF	CAP0402 CCG 75PF 1% 50V	C12	CAP-0402_1005	GMC04C2750F50NT	1
22 µF	CAP ALUM 22UF 20% 6.3V SMD	C16	CAP-ALSMD-4.3MM H5.4MM	EEE-0JK220R	1
Value	CAP 0MT0402X5R,3VDC CAP0402 CCG 33PF 5% 50V	C17, C18, C23, C24, C31, C32	CAP-0402_1005	NMC0402X5R330K1.3T 50PF, GMC04C220F50NT	6
100 µF	CAP TANT 100UF 20% 4V 1206	C20, C35	CAP-PCL-1206_3216	T491A107M004AT8530	2
4.7 µF	0402 6.3V X7T 4.7UF 10%	C22	CAP-0402_1005	KAM05C775JR7SKH	1
47 pF	CAP0402 CCG 47PF 1% 50V	C25, C26	CAP-0402_1005	GMC04C2470F50NT	2
100 pF	CAP0402 CCG 100PF 1% 16V	C33	CAP-0402_1005	GMC04C2100F16NT	1
10 pF	CAP0402 CCG 10PF 1% 16V	C34	CAP-0402_1005	GMC04C2100F16NT	1
1 µF	0402 X5R 1UF10% 25V	C36	CAP-0402_1005	GRM155R60N7ZA	1
330 µF	330UF,6V,20%	C37	CAP-PCL-2917_7343	TCM0J7M0169R0028E	1
SMLB35CA	TVS DIODE 35VWM 54.4VC DO214AA	D1	DO214AA-SMB	SMLB35CA	1
Red	LED RED CLEAR 1206 SMD	D2, D6, D7	LED-1206_3216-RED	SML-LX1206SRC-TR	3
Green	LED GREEN CLEAR 1206 SMD	D3	LED-1206_3216-GREEN	LN-S126ATG	1
NSR0330MA2T1G	Schottky Barrier Diode, 2-Pin SOD-323, Pb-Free, Tape and Reel	D4, D5, D8	CNSE-SOD-323-2-477-92_V	CMP-1055-00466-1	3
PESD5V0SL1BF,315	TVS DIODE 5VWM 11VC DSN0603-2	D9	NEXPERIA-SOD962-2-DSN0603-2	PESD5V0SL1BF,315	1
ESD5Z3.3TG	TVS DIODE 3.3VWM 14.1VC SOD523	D10	SOD523F	ESD5Z3.3TG	1
Yellow	LED YELLOW CLEAR 1206 SMD	D11	LED-1206_3216-YELLOW	GMD31-21VYC/TR8	1
MFL1206FF0075P50	FUSE BOARD MNT 750MA SMDC 1206	F1	FUSE-1206_3216-0.6MM	MFL1206FF0075P50	1
SZP6003.MX613	FUSE BRD MNT 3A 125VACVDC RAD	F2	BH-0250-MFG	CMP-00605-0000087-1	1
U.FL-R-SMT-1(10)	CONN U.FL RCPT SMT 50 OHM SMD	GSM_IPEX, GSM_IPEX2	KFU_FLR-SMT-1_10-MFG	CMP-2000-05152-3	2
JTAG	Connector Header Through Hole 8 position 0.100" (2.54mm)	J1	61300811121	61300411121_61300821121	1
2452808-1	8 (6 + 2) Position Card Connector NANO SIM Surface Mount, Right Angle Gold	J2	TE_2452808-1_2452808-1(Primary)	2452808-1	1
10 µH	FIXED IND 10UH 3.4A 61 MOHM SMD	L1	TDK VLS5045EX	VLS5045EX-100M	1
LQG15HS67NJ02D	Multilayer type RF inductor 47nH±5% 0.7GΩ 300mA 0402	L2	RFI_LQG15HH_02-HC_B	CMP-00042-003843-1	1
282837-2	Terminal Block Connector Wire Receptacle 2 5.08mm 30-16 AWG Green 13.5 A 250 V	P1	TE_282837-2	Barrier 2-w/s 5.08mm	1
MTLW-102-05-G-S-172	Dual Profile .025" SQ Post Header, Through-hole, Vertical, .050 x .025 dap, 2.54mm Pitch, 2-Pin, Male, RoHS	P2, P3, P4, P5, P6	SMTC-MTLW-102-05-X-S-172	CMP-1024-00064-1	5
ACM401A	P-Channel MOSFET, 30 V, 4 A, -55 to 150 degC, 3-Pin SOT-23-3L, RoHS, Tape and Reel	Q1	AOSOT-23-3L_V	CMP-2000-05778-1	1
ACM40A	MOSFET N-CH 30V 6.7A SOT23	Q2	FP-SOT23-MFG	CMP-03055-000006-1	1
10 kOhms	THN,0.4W,10KΩ 1% TF 100 PPM,0.1% TF 50 PPM,ED	R1, R2, R3, R13, R39, R50, R53, R61	RES0402_1005	THN,0402X10KB25PR0	8
51.1 kOhms	CPF 0603 51.1K 1% 25PPM 1K RL	R4	RES0402_1005	CPF0402B51K6E1	1
49.9 Ohms	RES 0402 49.9OHM 0.05% 1/16W SMD	R5	RES0402_1005	RG1005N-49R9-W-T1	1
330 mOhms	RES 0.33OHM 1% 1/3W 0805	R6	RES0805_2012	RL1220S-R33-F	1
105 kOhms	RES 105 KOHM 0.1% 1/16W 0402	R7	RES0402_1005	CPF0402B105K6E1	1
76.7 kOhms	RES,0402 100 75R7 1% ED	R8	RES0402_1005	MC1140276K7FKED	1
13.3 kOhms	RES 13.3KOHM 50 1% 1/16W 0402	R9	RES0402_1005	MCT3C1E13K3ETD	1
1 kOhms	THN,0.4W,1KΩ 0.1% TF 50 PPM,ED	R10, R11, R13, R17, R21, R22, R32	RES0402_1005	THN,0402X1K00B25R0	7
51 Ohms	RES SMD 51 OHM 5% 1/16W 0402	R14, R15, R16	RES0402_1005	CRCW0402-JW-510GLF	3
4.7 kOhms	RES THN,0.4W,4.7K 1/20W 4.7K	R18	RES0402_1005	NTD1633R4D0T4K0L	1
0 Ohms	R0SAASD402DR 0.4WR0150MV	R20, R29	RES0402_1005	CRD402AT-000GAS	2
5.1 kOhms	THN,0.4W,5.1KΩ 0.1% TF 50 PPM,ED	R23, R24	RES0402_1005	THN,0402X5K10B25R0	2
22 Ohms	RES 22 OHM 1% 1/8W 0402	R25, R26	RES0402_1005	RT24S3R9-TW23RL	2
10 Ohms	THN,0.4W,10KΩ 1% TF 50 PPM,ED	R28	RES0402_1005	THN,0402X10KB25R0	1
100 kOhms	THN,0.4W,100KΩ 0.1% TF 50 PPM,ED	R30	RES0402_1005	THN,0402X100KB25R0	1
470 Ohms	RES SMD 470 OHM 5% 1/16W 0402	R34	RES0402_1005	CRD402-JW-471GLF	1
43 kOhms	THN,0402 43K 0.1% TF 10 PPM,ED	R35	RES0402_1005	THN0402X43K0BRP	1
434123035816	Tactile Switch SPST-NO Top Actuated Surface Mount	S1, S6	434123035816	434123035816	2
	4.5-V to 28-V Input, 3-A Output, 8bit Friendly Synchronous Step-Down Converter	U1	TPS40300DDCR	TPS40300DDCR_1	1
AMS1117-3.3	Linear Voltage Regulator IC Positive, Fixed 1 Output 1A SOT-223-3L	U2	AMS1117 3.3V	AMS1117-3.3	1
TP4056	Complete single cell Li-Ion battery with a constant current / constant voltage linear charger	U3	TP4056	TP4056	1
L76L-M33	L76L is a concurrent receiver module integrating GPS, GLONASS, Galileo and QZSS systems. With 33 tracking channels, 99 acquisition channels and 210 PRN channels, L76L can acquire and track any mix of GPS, GLONASS and SBAS signals. Designed to be compatible with Quectel L76 module in the compact and unified form factor, L76-L provides a built-in LNA for better performance in weak signal areas.	U4	*XCVR_L76L-M33	L76L-M33	1
SMF05CTG	12.5V Clamp 9A (8/20µs) Ipp Tvs Diode Surface Mount SC-88/SC70-5/SOT-353	U5	*SCT05Y310V10-6N	SMF05CTG	1
ESP32-S3-WROOM-1-N8R2	WiFi 802.11a/b/g/n, Bluetooth v5.0 Transceiver Module 2.4GHz Antenna Not Included	U6	*XCVR_ESP32-S3-WROOM-1-N8R8, ESP32-S3-WROOM-1-N8R8(Primary)	ESP32-S3-WROOM-1-N8R2	1
MC33022AWJ/TR	CONFIGURATION OS AU/3A TO263-5	U7	IH-TO263-5EZPC-1-MFG	CMP-00324-000031-1	1
SIM800C	Module GSM/Bluetooth, GPRS, 2G, 1800MHz, 9200mA, 85.6kbps, SMD	U8	SIM800C	SIM800C	1
USB4085-GF-A_REVM	USB-C (USB TYPE-C) USB 2.0 Receptacle Connector 24 (16+8 Dummy) Position Through Hole, Right Angle, low cost, 3.46mm profile, 16 pin, horizontal, Top mount	USB-C1	Conn Type C 2.0	USB4085-GF-A_REVM	1
USBLC6-2SC6	17V Clamp 5A (8/20µs) Ipp Tvs Diode Surface Mount SOT-23-6	USBLC1	USBLC6-2SC6	USBLC6-2SC6	1


C37
L1
SIM800C
J1
S3
R31
M33
S4
F1
D5

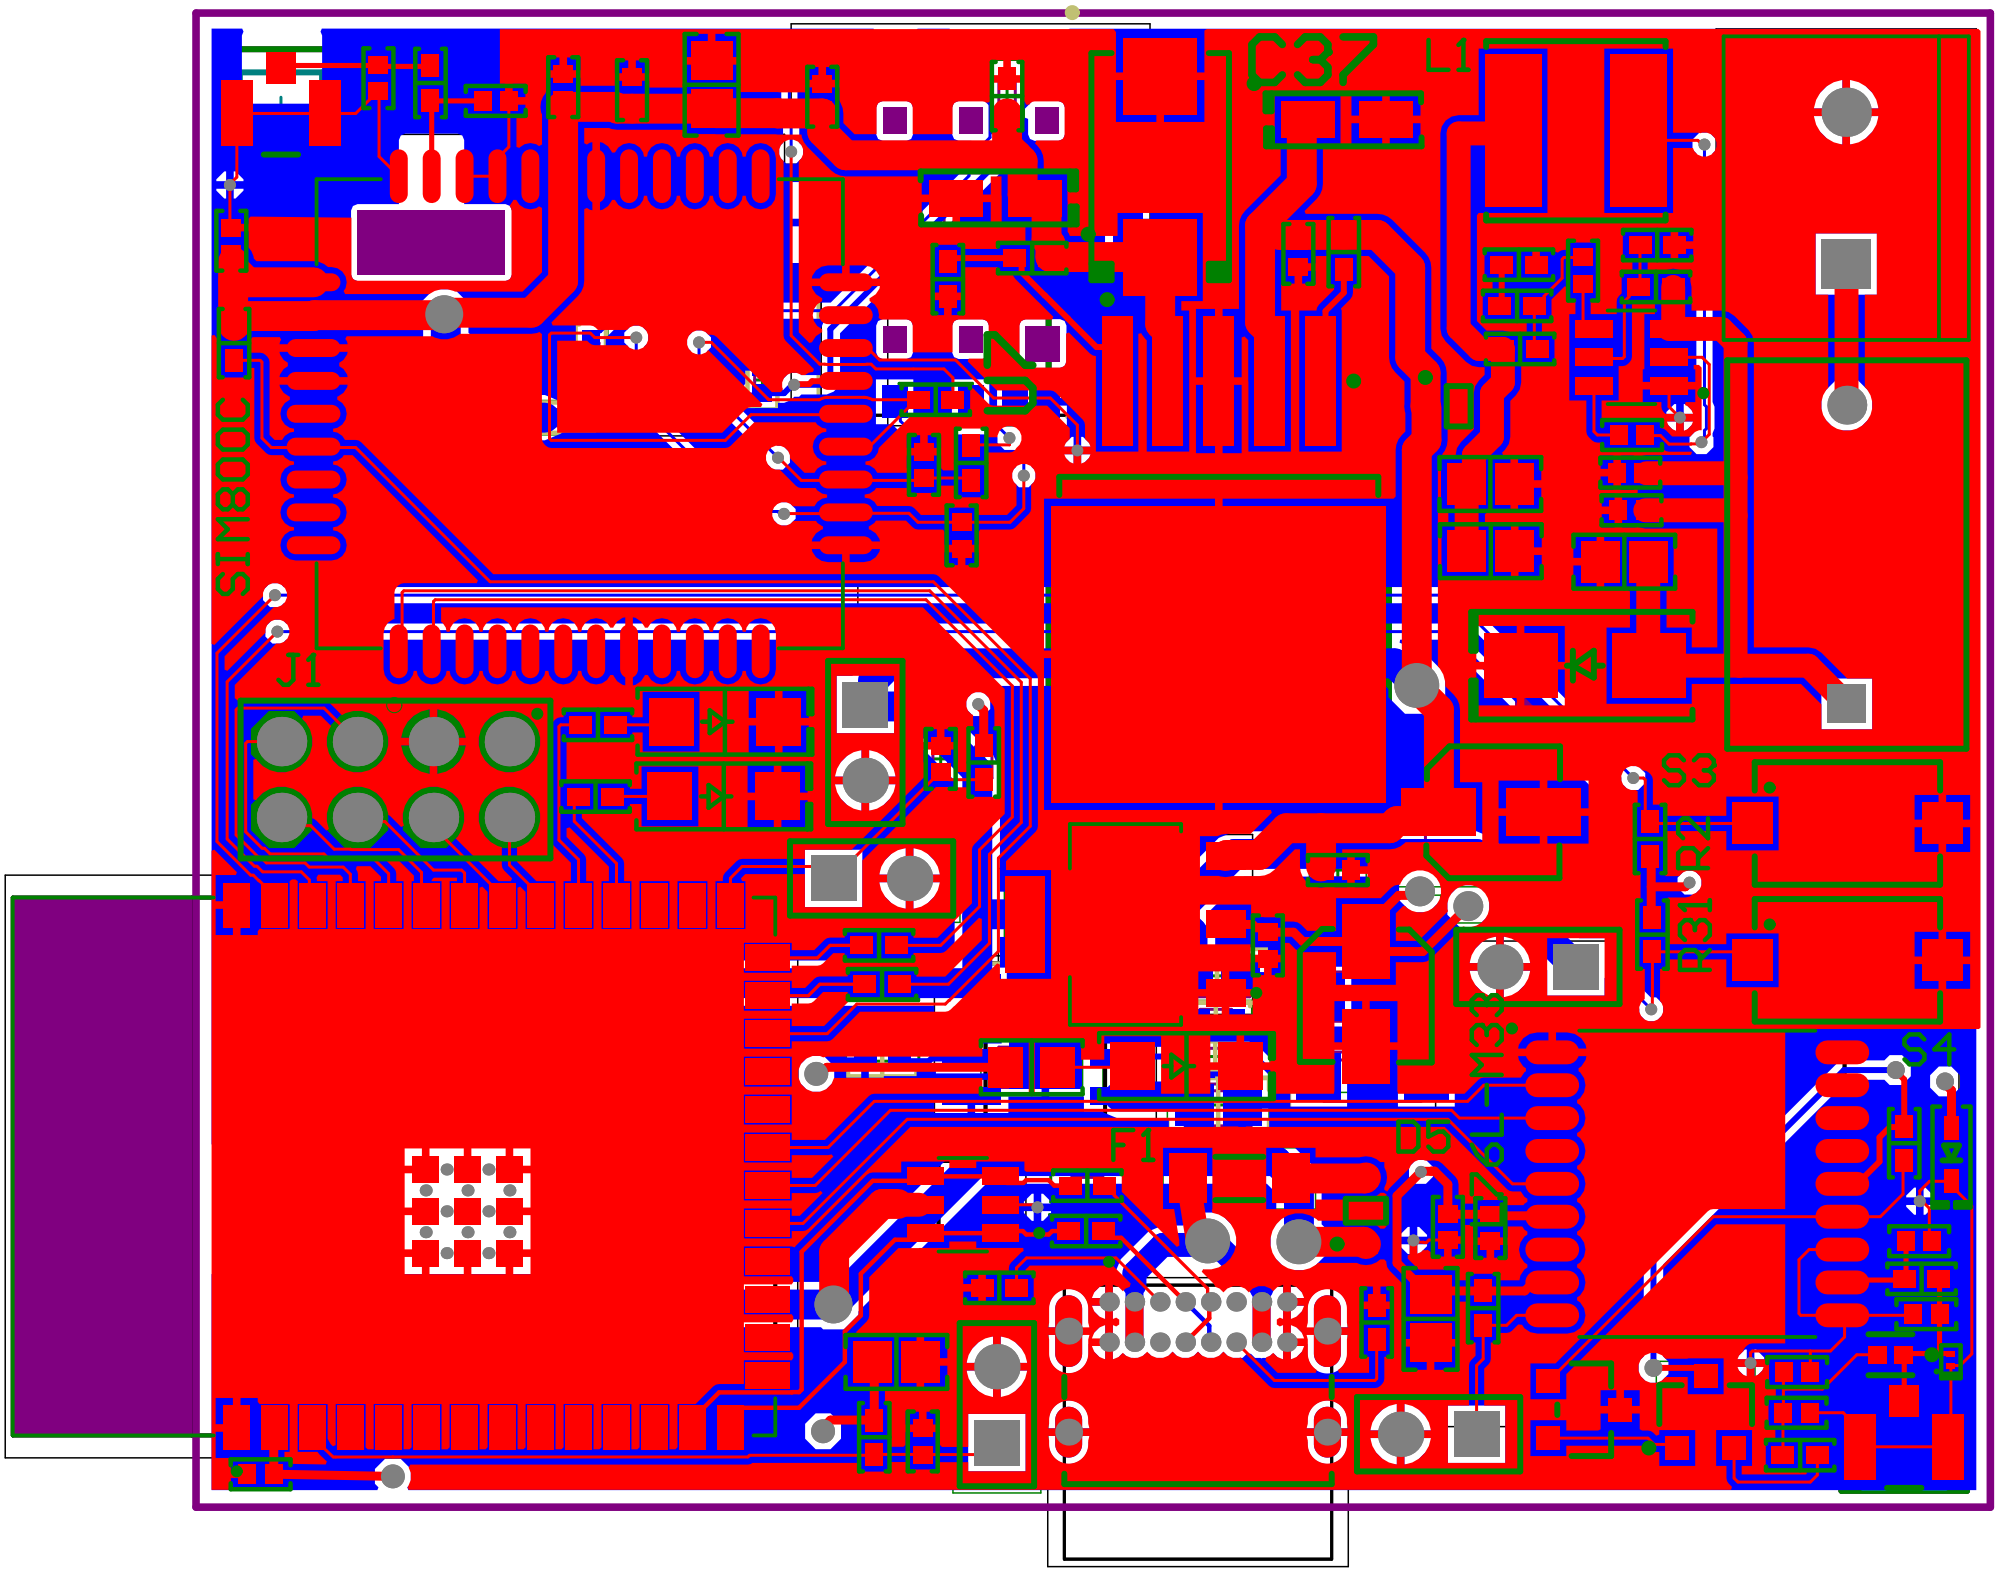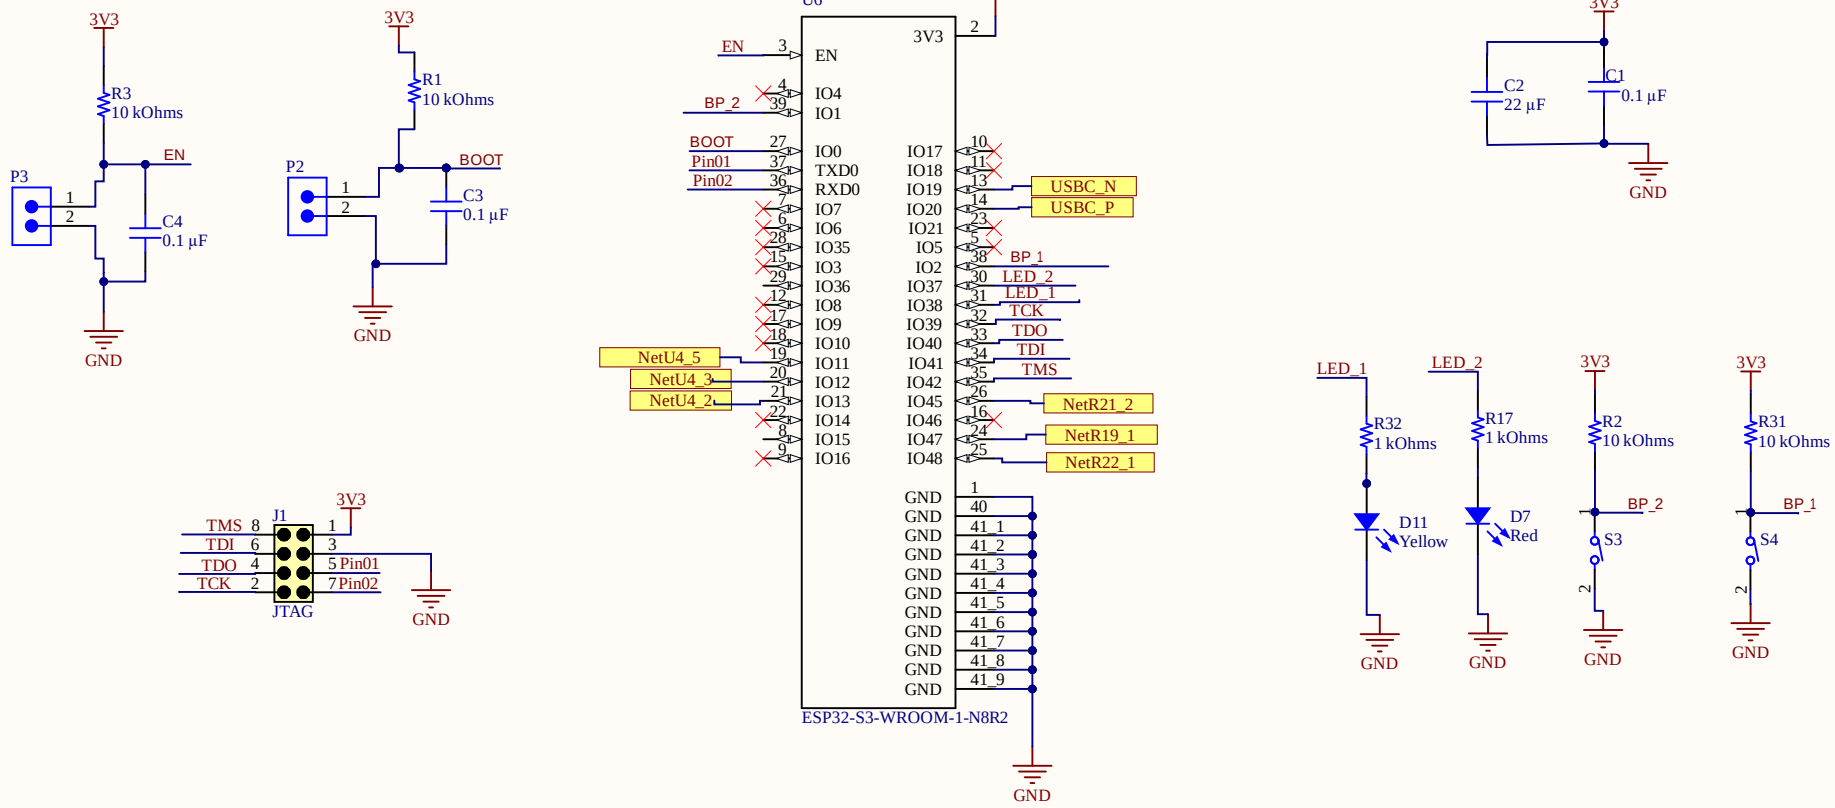


Title		
Size: A4	Number	Revision
Date: 10/25/2026		Sheet of
File: D:\Conception PCB\..\MCU.SchDoc		Drawn By:


BUCK CONVERTER

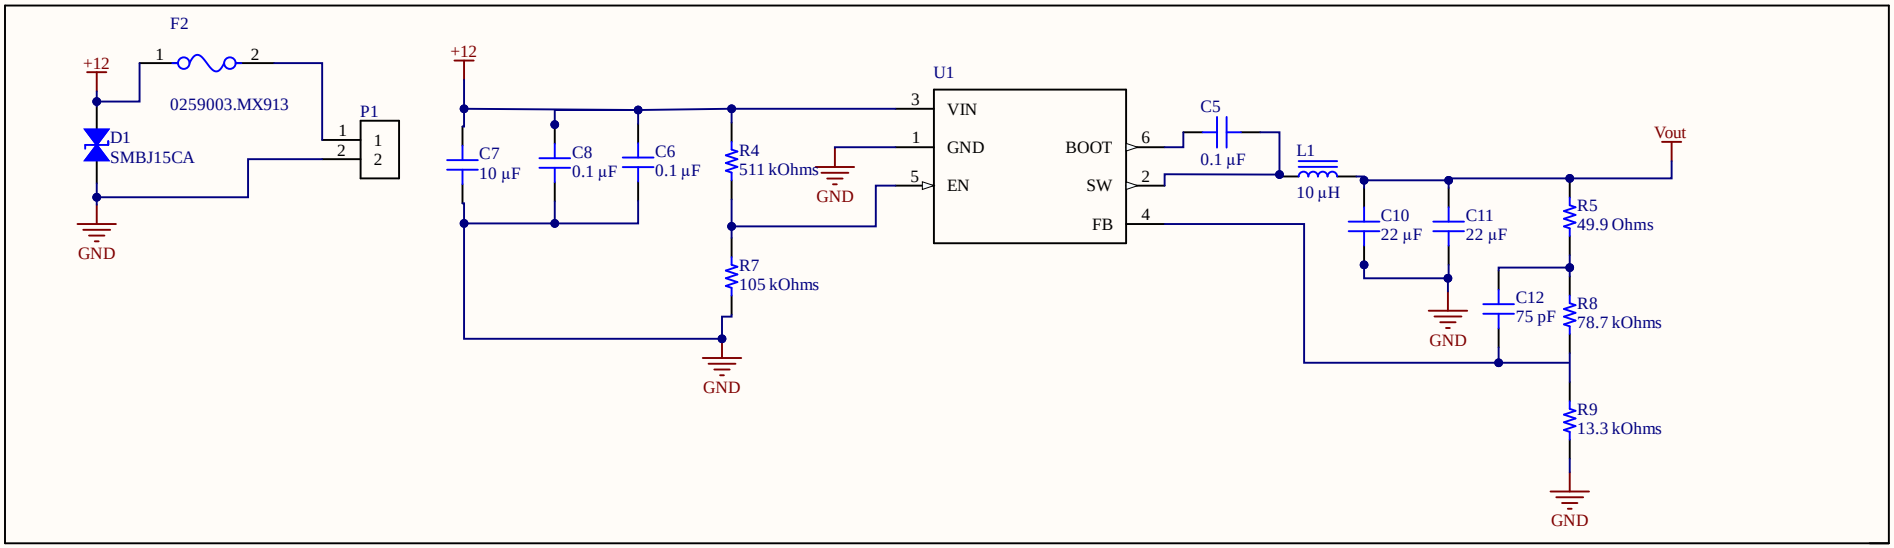



CHARGEUR BAT

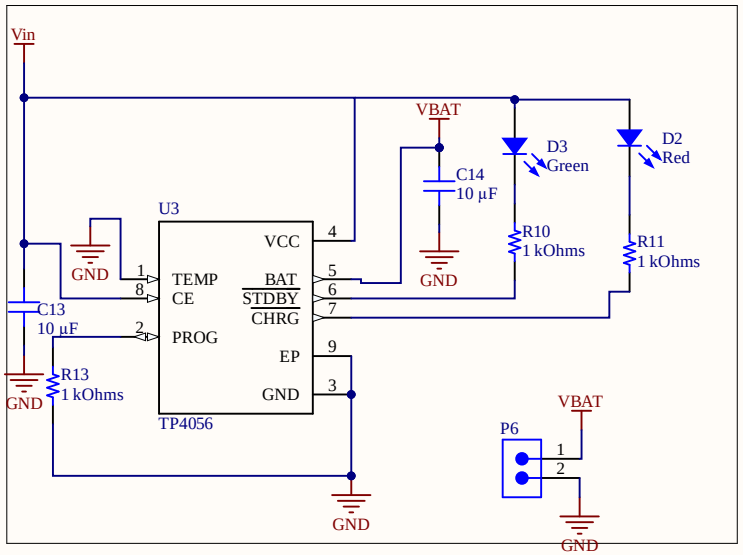


ABAISSEUR 3.3

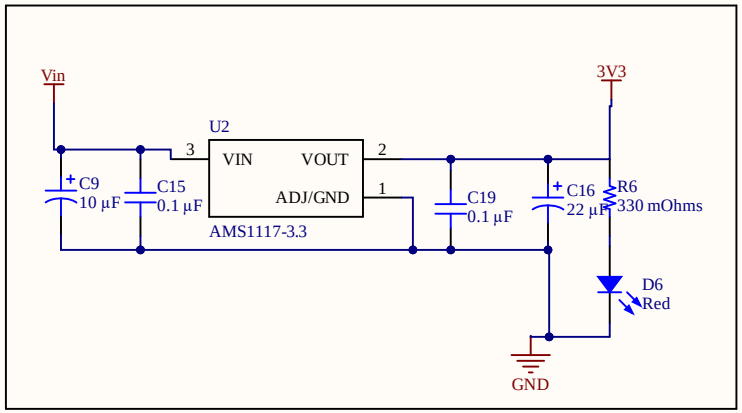






USB-C

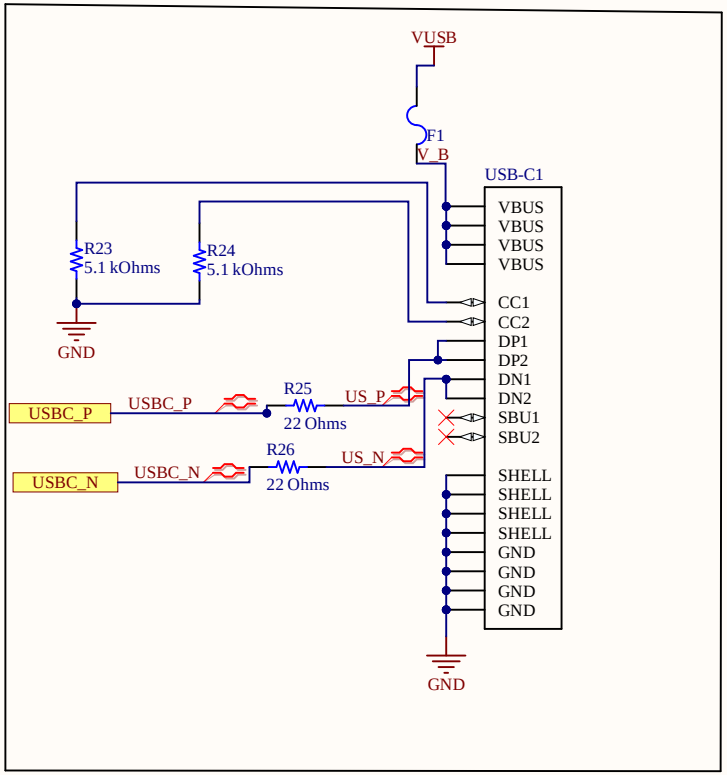


ESD

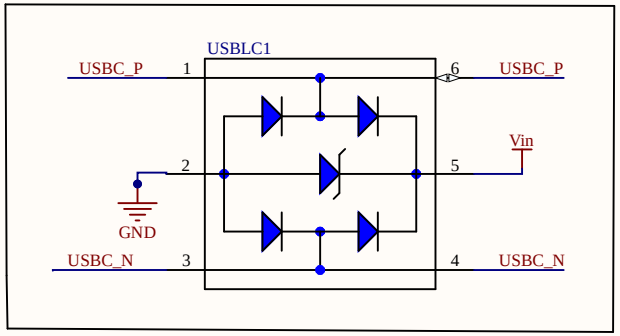


Title		
Size: A4	Number	Revision
Date: 10/25/2026		Sheet of
File: D:\Conception PCB\..\USB-C.SchDoc		Drawn By:


SIM800C(MODULE GSM/GPRS)

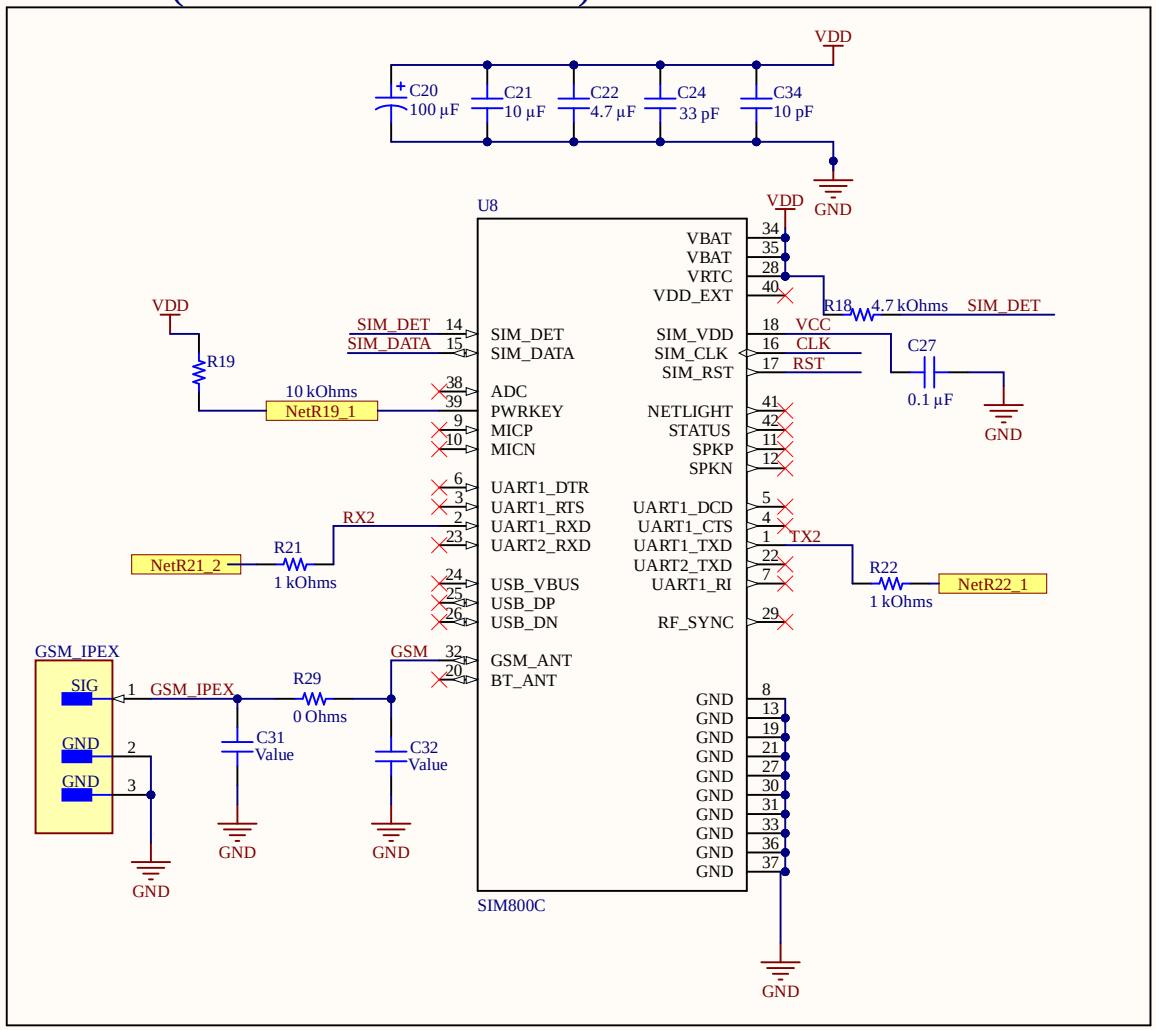


MICRO SIM

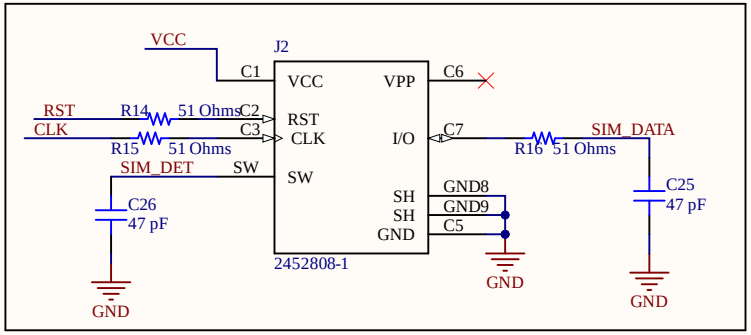


LDO power supply

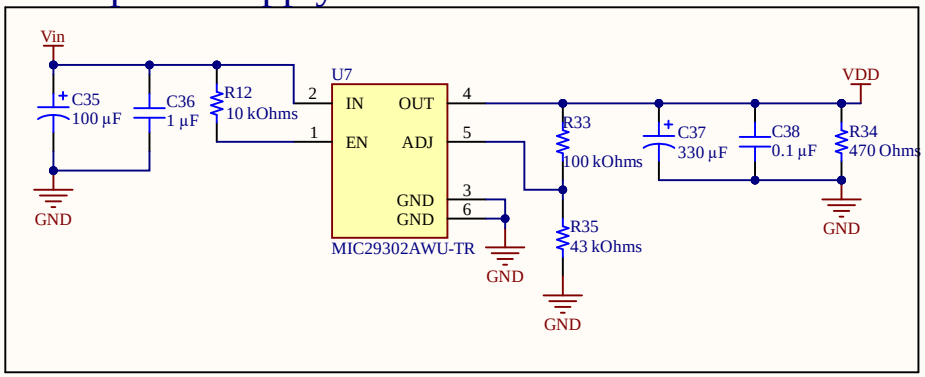

ESD

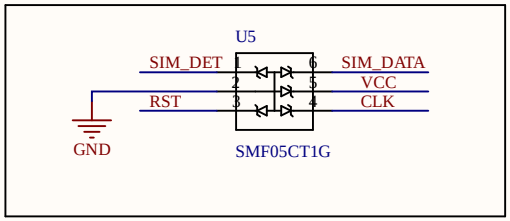

Title		
Size A4	Number	Revision
Date: 10/25/2026		Sheet of
File: D:\Conception PCB\..\SIM.SchDoc		Drawn By:

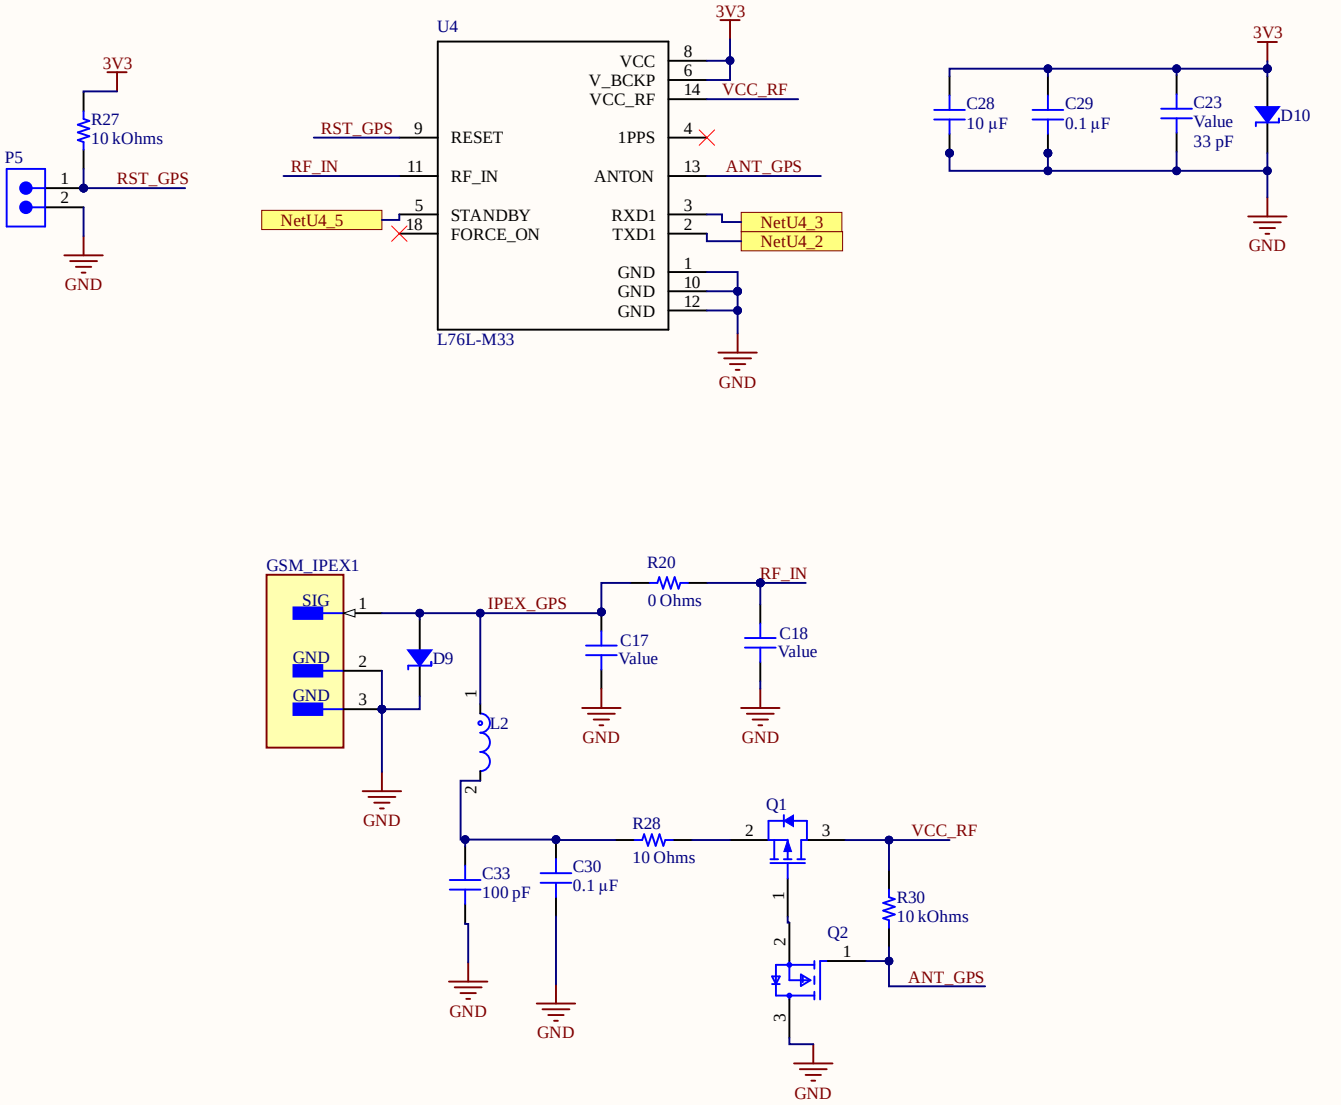

Title			
Size A4	Number		Revision
Date: 10/25/2026		Sheet of	
File: D:\Conception PCB\..\GPS_GNSS.SchDoc		Drawn By:	