

INDUSTRIAL PRODUCT DATASHEET

Seeed Studio Grove Base for XIAO - with embedded battery management chip

A compact XIAO expansion board with battery management and Grove connectors for solderless, rapid prototyping.

SKU

103020312

UPDATED

2026-05-14 02:35:05

PRICE

\$4.50(Excl. VAT)



Overview



The Seeed Studio Grove Base for XIAO features an embedded battery management chip and Grove connectors, enabling easy powering and recharging of the XIAO with a lithium battery while simplifying connections to over 300 Grove modules. Its compact, breakable design and included headers make it ideal for rapid prototyping and small-size projects without soldering.

Key Features

- On-board Lithium Battery Charging and Management Function, you could easily power your Seeed Studio XIAO with lithium 3.7V battery and recharge it
- Grove connectors (Grove IIC*2, Grove UART*1), all 14 GPIO led out
- Compact and Breakable Design
- SPI-Flash Bonding Pad Reserved
- On-board Power Switch and Charging Status Indicator Light




It acts as a bridge for Seeed Studio XIAO and Seeed's Grove system, which provides 300+ of different Grove modules including sensor, actuator, communication, display, etc. No more jumper wires and soldering work, you could enjoy creating more projects with Seeed Studio XIAO easily and quickly.

You could even break the board through the onboard PCB stamp holds according to your actual needs of the project (only 25*39mm in dimension after break-off), making it smaller than smaller.

Note

A pair of non-soldered 7-pin headers are accompanied in the product of Seeed Studio XIAO. You could solder them before connecting Seeed Studio XIAO with this Shield by plugging the soldered pin headers into the female headers on the Shield.



Product Gallery

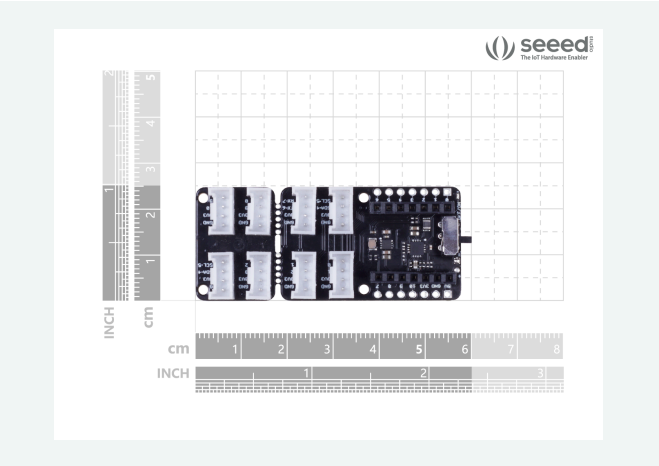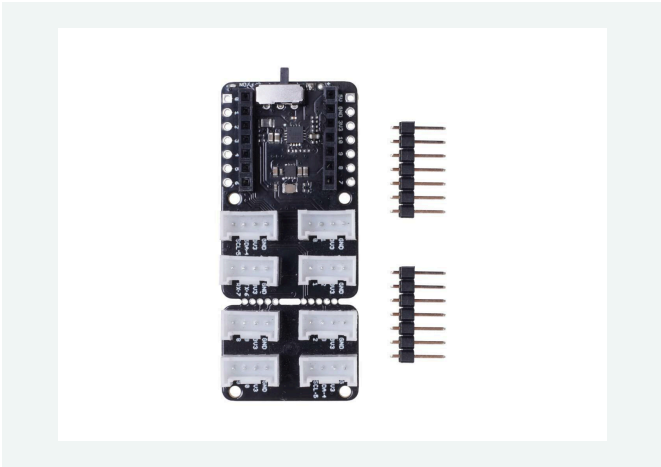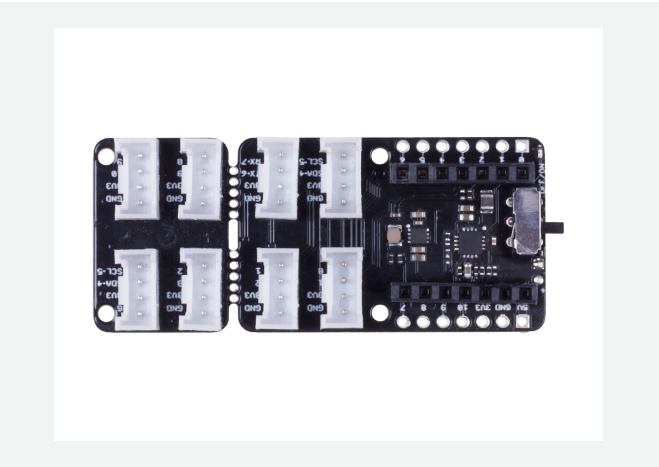

Specification

Parameters	values
Power Supply	5V / 3.7V Lithium Battery
Load Capacity	800mA
Charging current	400mA (Max)
Operating Temperature	- 40°C to 85°C
Storage Temperature	-55°C to 150°C
Grove Interface	Grove * 8 (IIC*2 / UART*1)

Hardware Overview

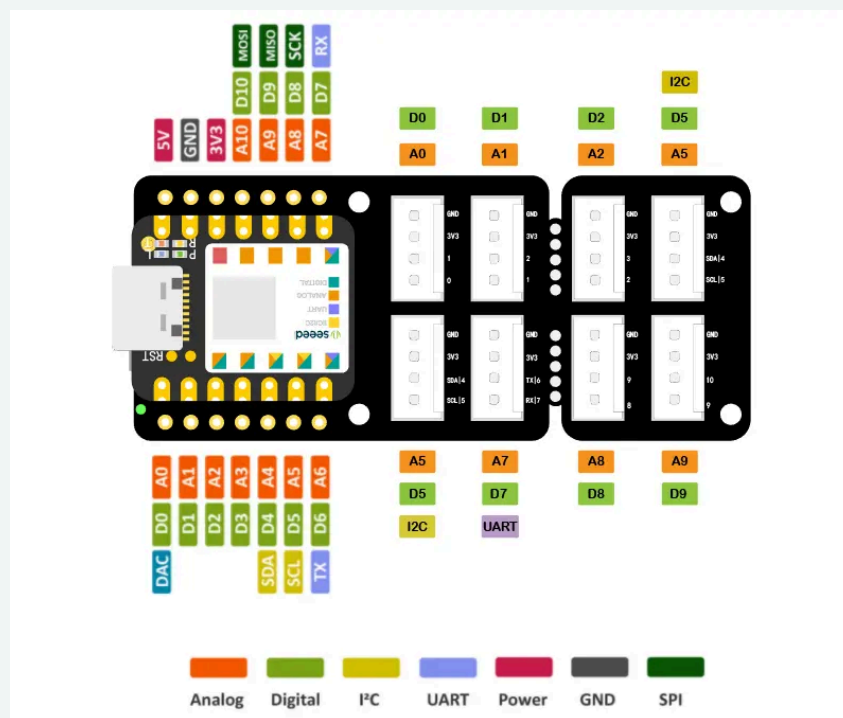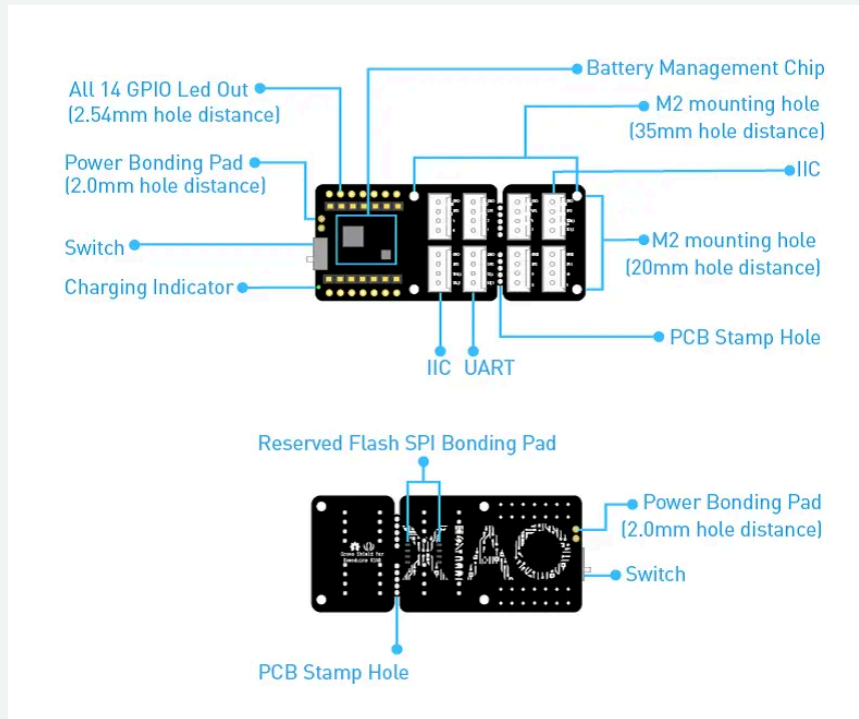

Applications

- Wearable devices
- Rapid prototyping
- Grove modules testing
- Projects require small size

Part List

Grove Shield for Seeed Studio XIAO	1
1*7pins male header	2

Compliance & Logistics



HSCODE	8517180050
USHSCODE	8517180050
UPC	841454123231
EUHSCODE	8543709099
COO	CHINA

Resource Links

- <https://www.seeedstudio.com/Grove-Shield-for-Seeeduino-XIAO-p-4621.html>
- PCN-103020312-Seeed Studio Grove Base for XIAO
- XIAO Reference Design
- 3D Printing "Case" Studies

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com