
Sew-out card v7: pull by stroke and the pro's values

card_v7_40wt.dst | one dark cone, 40 wt, 75/11 | 4 x 4 in hoop (88.4 x 93.2 mm: too tall for a cap frame) | twill + your Fremont backing | 12,512 stitches, 59 trims, ~19 min at 650 spm | trims on

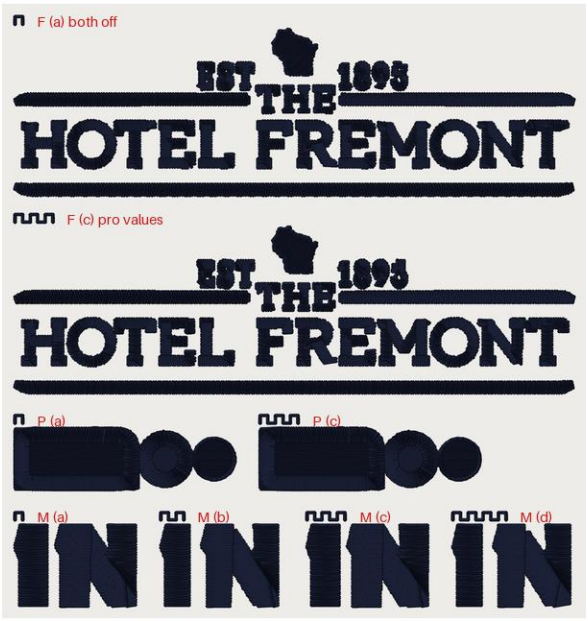

piece	teeth	flags	stitches	plan (mm)	look for
F (a)	|	off pull_comp_by_stroke off pro_measured_values	3,745	satin 1.42 / 1.42 rail step 0.4 split 0% fill stitch 1.89 (p75)	Hold it beside the pro's Fremont patch. HOTEL FREMONT and the two bars: fabric showing between satin stitches? bars puckered or flat? Wisconsin: fabric through the fill? Letters as heavy as the pro's?
fabric showing? Y / N	puckered? Y / N	breaks: ____			
F (c)	|||	off pull_comp_by_stroke ON pro_measured_values	3,900	satin 1.42 / 1.42 rail step 0.37 split 0% fill stitch 2.32 (p75)	Hold it beside the pro's Fremont patch. HOTEL FREMONT and the two bars: fabric showing between satin stitches? bars puckered or flat? Wisconsin: fabric through the fill? Letters as heavy as the pro's?
better than (a)? Y / N	fabric showing? Y / N	puckered? Y / N	breaks: ____		
P (a)	|	off pull_comp_by_stroke off pro_measured_values	1,556	fill stitch 3.0 (p75) bean cap 0.73	Fill coverage: fabric showing through the field or the big disc (fill stitch 3.0 vs 3.49)? Puckering or tunnels round them? The SMALL disc's bean edge line (0.73 vs 0.95): smooth, or lumpy / gappy? Lies flat off the hoop?
fabric showing? Y / N	puckered? Y / N	breaks: ____			
P (c)	|||	off pull_comp_by_stroke ON pro_measured_values	1,458	fill stitch 3.49 (p75) bean cap 0.93	Fill coverage: fabric showing through the field or the big disc (fill stitch 3.0 vs 3.49)? Puckering or tunnels round them? The SMALL disc's bean edge line (0.73 vs 0.95): smooth, or lumpy / gappy? Lies flat off the hoop?
better than (a)? Y / N	fabric showing? Y / N	puckered? Y / N	breaks: ____		
M (a)	|	off pull_comp_by_stroke off pro_measured_values	568	satin 4.4 / 2.29 rail step 0.4 split 89%	Calipers across the I's stem: the art draws ~4.2 mm, the pro sews 4.0. Split satin (a line of needle holes down the column) or plain, like the pro's? The gap between I and N and the N's two notches: open or closed up? Puckering beside the columns? Fabric showing?
fabric showing? Y / N	puckered? Y / N	breaks: ____			
M (b)	||	ON pull_comp_by_stroke off pro_measured_values	344	satin 3.79 / 3.76 rail step 0.4 split 5%	Calipers across the I's stem: the art draws ~4.2 mm, the pro sews 4.0. Split satin (a line of needle holes down the column) or plain, like the pro's? The gap between I and N and the N's two notches: open or closed up? Puckering beside the columns? Fabric showing?
better than (a)? Y / N	fabric showing? Y / N	puckered? Y / N	breaks: ____		
M (c)	|||	off pull_comp_by_stroke ON pro_measured_values	612	satin 4.4 / 2.27 rail step 0.36 split 90%	Calipers across the I's stem: the art draws ~4.2 mm, the pro sews 4.0. Split satin (a line of needle holes down the column) or plain, like the pro's? The gap between I and N and the N's two notches: open or closed up? Puckering beside the columns? Fabric showing?
better than (a)? Y / N	fabric showing? Y / N	puckered? Y / N	breaks: ____		
M (d)	||||	ON pull_comp_by_stroke ON pro_measured_values	364	satin 3.79 / 3.76 rail step 0.36 split 6%	Calipers across the I's stem: the art draws ~4.2 mm, the pro sews 4.0. Split satin (a line of needle holes down the column) or plain, like the pro's? The gap between I and N and the N's two notches: open or closed up? Puckering beside the columns? Fabric showing?
better than (a)? Y / N	fabric showing? Y / N	puckered? Y / N	breaks: ____		

The pro's own I and N (his DST, same reader, same window): cross 4.02, stitch 3.74, split 7%. On these F pieces (b) is (a) and (d) is (c) byte for byte (across the whole design the pull flag moves two tagline letters by 0.02 mm): Fremont's strokes are ~0.85 mm, where the pull fit returns the hat's own 0.4. F sews (a) and (c) only. Planned satin = the file's medians, not the cloth's: cross = rail to rail, stitch = needle to needle, split = crosses sewn in two stitches. Every number is a candidate until this is sewn (ROADMAP gate 1).

Flip pull_comp_by_stroke? Y / N

Flip pro_measured_values? Y / N