

Ex No 100
29/9/26

Internetworking with routers with in CISCO Packet Tracer simulator.

Aim:

To design and configure a simple inter network using a router in cisco packet Tracer and fast Connectivity between two PCs.

Procedure:

Step 1: Configure Router 1


- * select the router and open CLI.
- * Press Enter to start configuring router.
- * Type enable to activate the privileged mode.

Step 2:

- * Assign IP address to every PC in the network.
- * select the PC, Go to the desktop and select IP Configuration and assign and IP address, Default gateway, subnet mask.
- * Assign the default gateway of PC0 as 192.168.10.1.
- * Assign the default gateway of PC1 as 192.168.20.1.

Step 3:

- * Connect fast Ethernet () port of PC0 with fast ethernet 0/0 port of Router using a Copper straight through cable.
- * Connect Fast ethernet () port of PC1, with Fast Ethernet 0/1 port of Router using a Copper straight through cable.

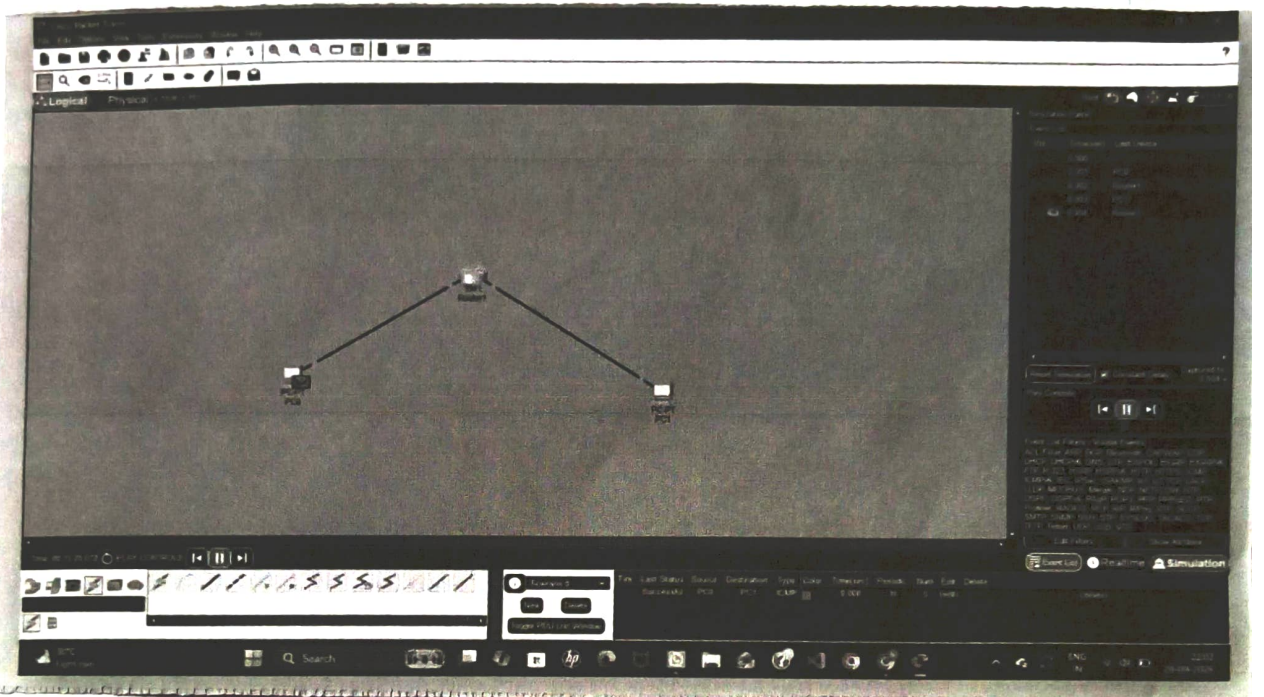

8/16

Ex. No. 106

29/9/26


Design and configure an internetwork using wireless router, DHCP server and internet cloud.

Aim :

To design and configure an internetwork using a wireless router, DHCP server and Internet cloud in CISCO packet Tracer.

Procedure :

- ★ open Cisco Packet Tracer and create the required network topology.
 - ★ Connect PC, Laptop, wireless Router, Cable Modem, Internet cloud and server.
 - ★ Configure the wireless Router with SSID home network and enable DHCP.
 - ★ Connect the Laptop to the wireless network and set the PC to DHCP.
 - ★ Configure the server with IP 208.67.220.220 and enable DHCP and DNS.
 - ★ Verify Connectivity using `ip config` and `ping cisco.com`.
- 

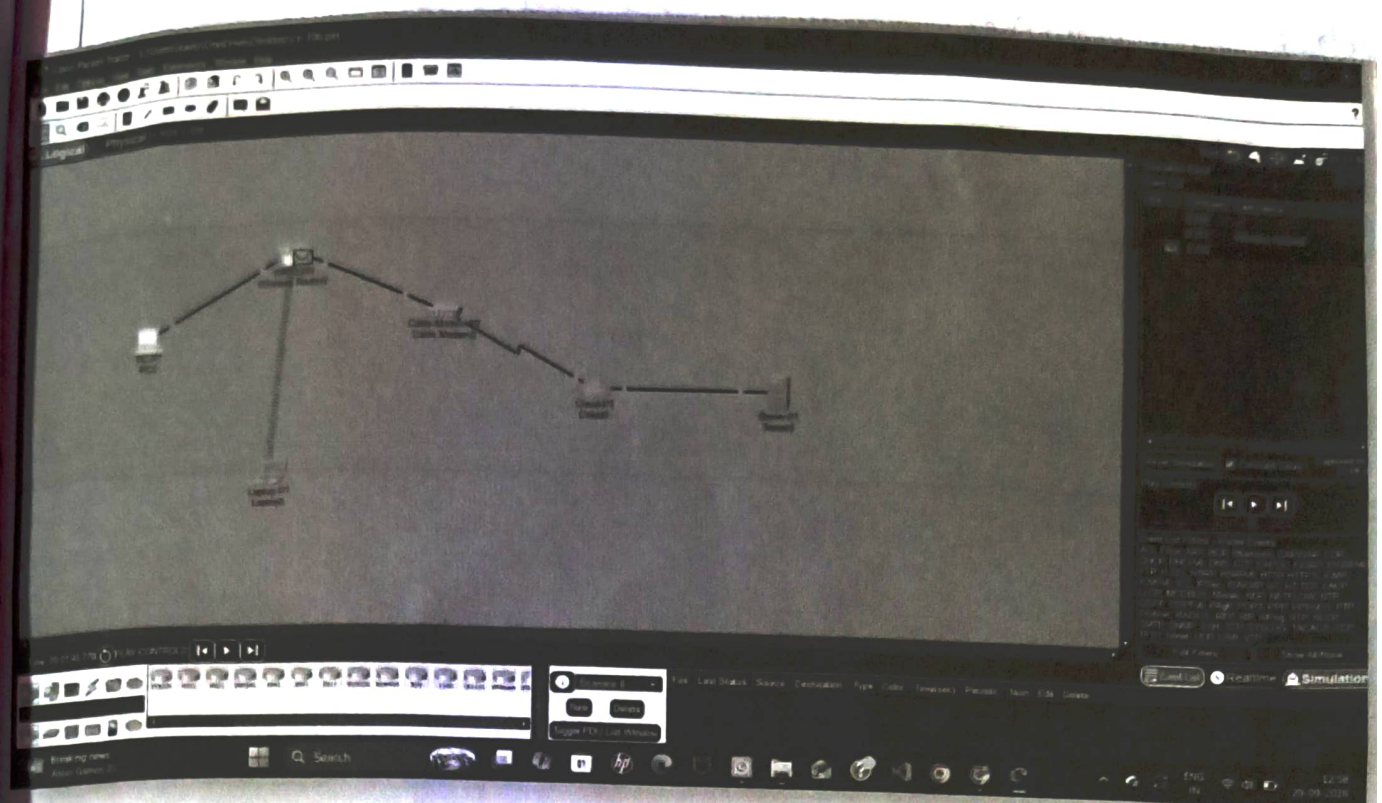

```

PC0
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping cisco.com

Pinging 208.67.220.220 with 32 bytes of data:

Reply from 208.67.220.220: bytes=32 time=2ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127

Ping statistics for 208.67.220.220:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>

```

Result:

The ~~internet~~ network was successfully designed and ~~it~~ configured using wireless router, was verified.