





1 Ground Floor
1 : 50

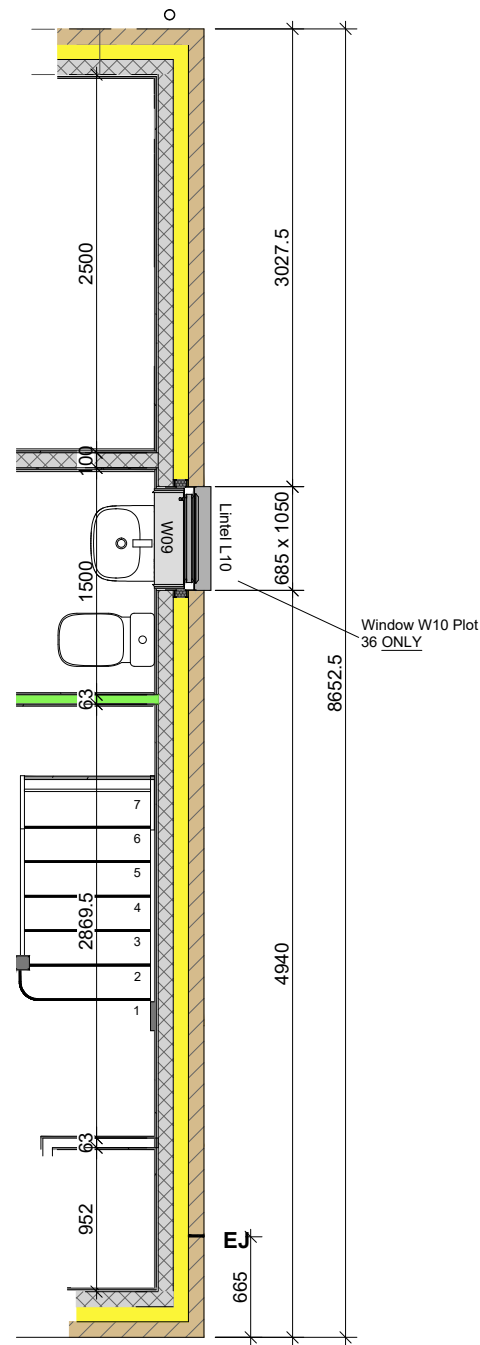

2 Ground Floor - Plot 36 Callout
1 : 50

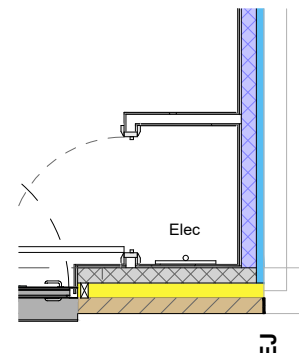

3 Mid Tce Elec Meter
1 : 50

Plots 32, 34, 36, 46 (AS) & 33, 35, 47 (OPP)

Revision Schedule			
Rev	Date	Description	Drn By
C1	28.11.25	Construction Issue	-

Wall Legend (100mm Cavity)

	Standard External Insulated Cavity Wall - 0.24W/m²K 102.5mm facing brickwork 100mm cavity filled with blown mineral fibre insulation* 100mm aerated concrete block, K-value 0.11W/m²K, min strength 2.9N/mm² 12.5mm gypsum board on adhesive dabs
	Mid Strength External Insulated Cavity Wall - 0.25W/m²K 102.5mm facing brickwork 100mm cavity filled with blown mineral fibre insulation* 100mm aerated concrete block, K-value 0.15W/m²K, min strength 3.6N/mm² 12.5mm gypsum board on adhesive dabs
	High Strength External Insulated Cavity Wall - 0.26W/m²K 102.5mm facing brickwork 100mm cavity filled with blown mineral fibre insulation* 100mm aerated concrete block, K-value 0.19W/m²K, min strength 7.3N/mm² 12.5mm gypsum board on adhesive dabs
	External Uninsulated Cavity Wall (to garage, cold roof space etc.) 102.5mm facing brickwork 100mm air cavity 100mm aerated concrete block min strength 2.9N/mm²
	Party Wall 100mm aerated concrete block, with density range between 600-800kg/m³ 100mm Party Wall blown glass mineral wool insulation 100mm aerated concrete block, with density range between 600-800kg/m³ 12.5mm gypsum board on adhesive dabs
	Internal Blockwork Partition Between Dwelling and Garage 100mm aerated concrete block min strength 2.9N/mm² 63mm British Gypsum Thermaline PIR Plasterboard on adhesive dabs
	Internal Blockwork Partition 12.5mm gypsum board on adhesive dabs 100mm aerated concrete block min strength 2.9N/mm² 12.5mm gypsum board on adhesive dabs
	Structural Stud Partition 12.5mm gypsum board 12.5mm OSB2 sheathing 63 x 38mm timber studs (studs and noggings rotated through 90°) 12.5mm gypsum board 12.5mm OSB2 sheathing
	Non-Load Bearing Stud Partition 12.5mm gypsum board 63 x 38mm timber studs 12.5mm gypsum board
	Stud Partition with Acoustic Insulation 12.5mm gypsum board 63 x 38mm timber studs, with 50mm thick Isover APR 1200 acoustic insulation packed between 12.5mm gypsum board

Note:- all blockwork drawn blue to be 7.3N/mm² as per Structural Engineers comments.
Refer to relevant Construction Specification for either 2013 and 2021 Build regs for further details

For Country Tile (CT), Country Weatherboard (CW) and Town Tile (TT), external skin to be 3.6N/mm² lightweight aggregate blocks to areas which are to receive alternative external treatment only.
This drawing must be read in conjunction with 25 series drawings.

* For Welsh Properties, substitute blown mineral fibre with 0.022W/mK 90mm thick PIR board.

CONSTRUCTION **Bellway**
www.bellway.co.uk

Bellway Homes (Eastern Counties)
Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Project
Somersham
St Ives Road
Working Drawings

Drawing Title
The Draftsman-Life DML-3B-2S-AT
934 ft² | 3b Semi/Mid | All Traditional Variants
Ground Floor Setting Out Plan

Drawing Created By Group	First Issue Date April '25	Scale(s) 1 : 50
Project No BI01	Drg Status Construction	Revision C1

Drawing No. **BI01/934DML/10/AT/01**

Do not scale - if in doubt, ask