Image Processing Unit V3 (IPUV3) Library

User's Guide

Document Number: 924-76397
Rev. 09.12.00
12/2009

How to Reach Us:

Home Page:
www.freescale.com

Web Support:
http://www.freescale.com/support

USA/Europe or Locations Not Listed:
Freescale Semiconductor
Technical Information Center, EL516
2100 East Elliot Road
Tempe, Arizona 85284
+1-800-521-6274 or +1-480-768-2130
www.freescale.com/support

Europe, Middle East, and Africa:
Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
www.freescale.com/support

Japan:
Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064, Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:
Freescale Semiconductor China Ltd.
Exchange Building 23F
No. 118 Jianguo Road
Chaoyang District
Beijing 100022
China
+86 010 5879 8000
support.asia@freescale.com

For Literature Requests Only:
Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or 303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Contents

Chapter 1 IPUV3 Library User's Guide

1.1 Introduction

This chapter presents IPU library related data types and APIs. IPU library is based on IPU hardware, it can implement below features:

- Resize
- Rotation
- Color space/format convert
- Overlay combination with the same size window which supports color key and alpha blending
- Output display to frame buffer directly after IPU process
- Two outputs processed from one input
- Windows crop
- Local alpha blending

IPU library assumes there are three kinds of operational buffers that could be in the IPU process:

- Input buffers, they contain the data which want to process, user can allocate by himself or let it be done by IPU library.
- Output buffers, they contain the data of finished process from input buffers, user can allocate by himself or let it be done by IPU library; if user wants to display output directly to frame buffer, then user does not need to allocate them, frame buffer now is the output buffer.
- Overlay buffers, they contain the data which want to process and combination.

Note:

The three buffers should be continuous.

There are two operation modes for IPU buffers:

- Stream mode, which will use double buffer in IPU low level operation.
- Normal mode, which will only use single buffer in IPU low level operation.

1.2 Example flow

This section lists some examples of IPU operations; all these examples can be tested by modifying `ipudev_config_file` file in IPU lib unit test:

- Input buffer: YUV format, QVGA
- Output buffer: RGB format, VGA
- IPU Lib: Resize, color space convert, rotation



Figure 1-1. Resize, CSC and rotation example

- Input buffer: RGB format, QVGA window in VGA buffers (enable input crop)
- Output buffer: RGB format, VGA
- IPU Lib: Resize, Input Crop

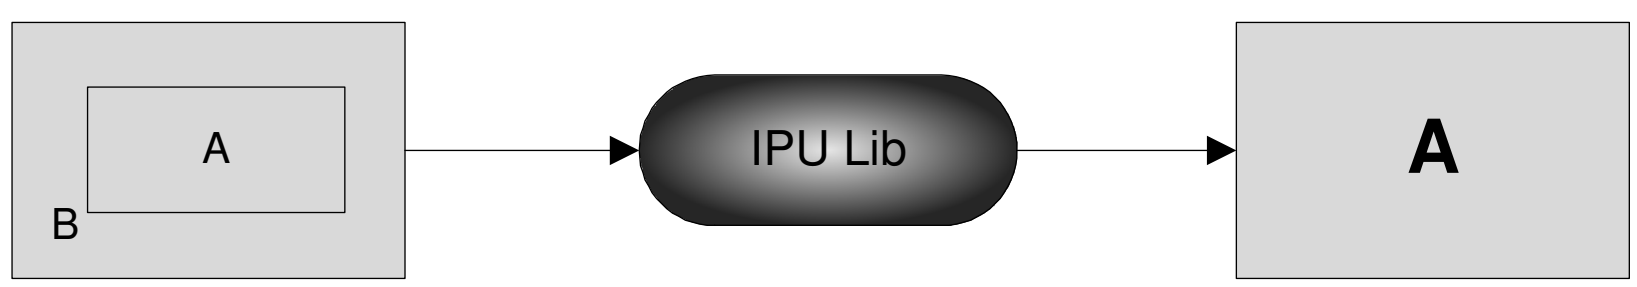

Figure 1-2. Input Crop example

- Input buffer: RGB format, VGA
- Output buffer: RGB format, QVGA window in VGA buffers (enable output crop)
- IPU Lib: Resize, Output Crop

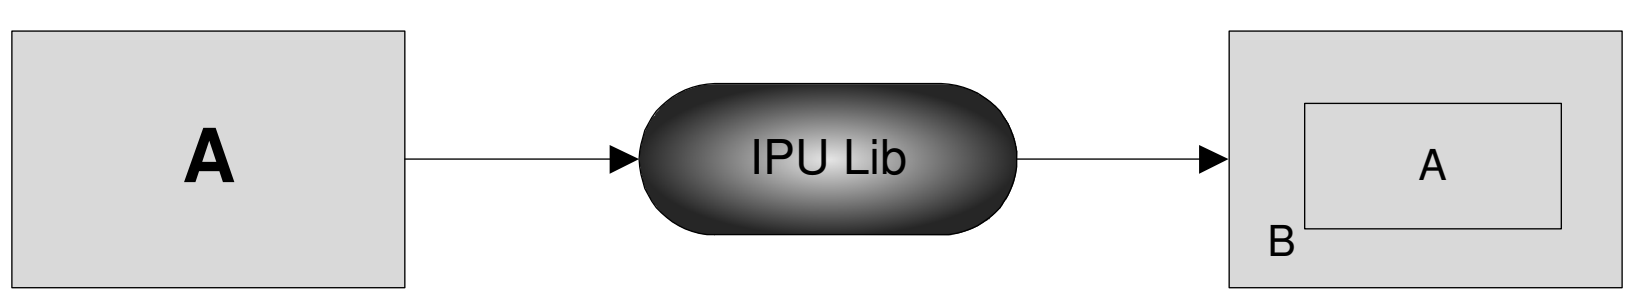

Figure 1-3. Output Crop example

- Input buffer: RGB565 format, QVGA
- Overlay buffer: BGR24 format, VGA
- Output buffer: RGB565 format, QVGA
- IPU Lib: Resize for overlay, format change for overlay, combination for input & overlay

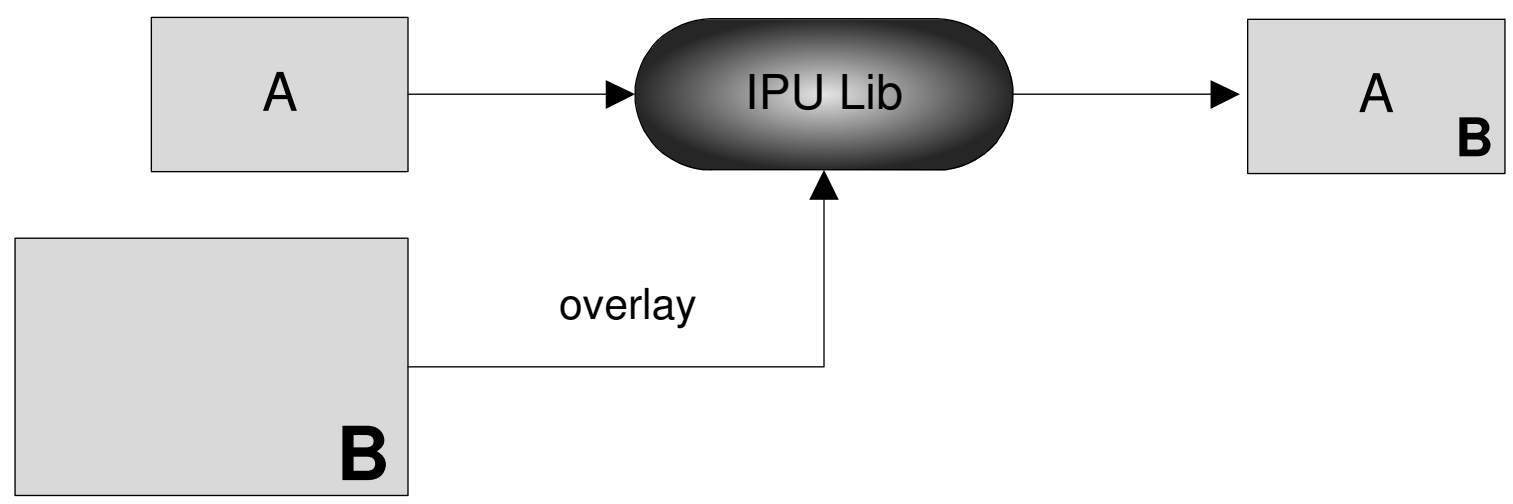

Figure 1-4. Overlay example

- Input buffer: QVGA
- Output0 buffer: VGA
- Output1 buffer: 300*200
- IPU Lib: Resize & rotation to output0, resize to output1

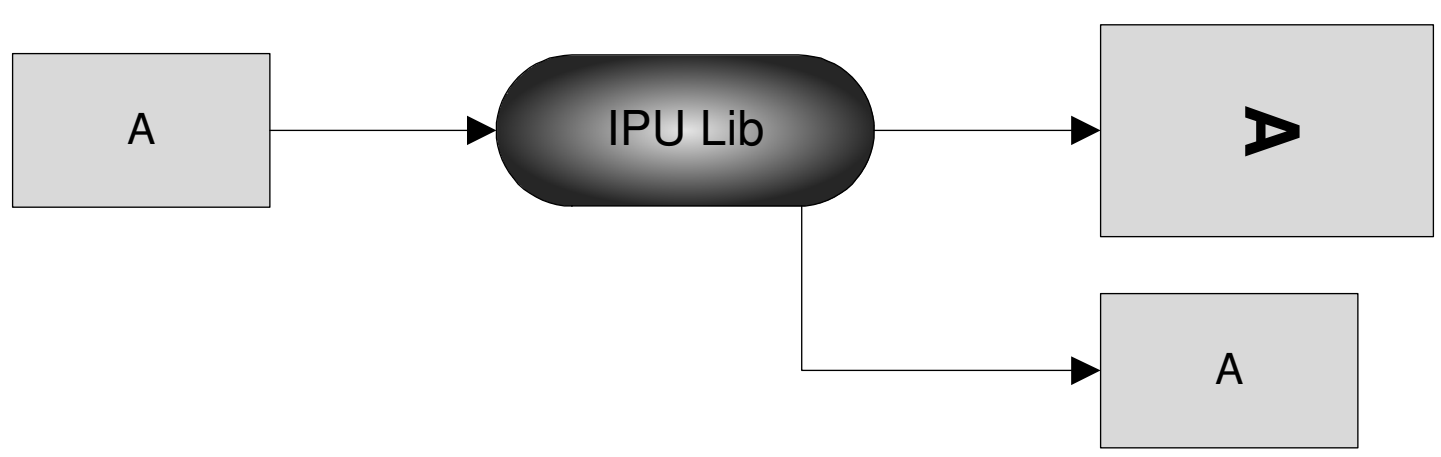

Figure 1-5. Two outputs example

- Input buffers(double buffer): QVGA, index 1 & 2
- Output buffers (double buffer): VGA, index 1 & 2
- IPU Lib: stream mode, do resize for input.

Operation steps for two-outputs example:

- Prepare buffer A & B
- Finish index 1 – buffer A

- Finish index2 – buffer B
- Prepare buffer C
- Finish index1 – buffer C

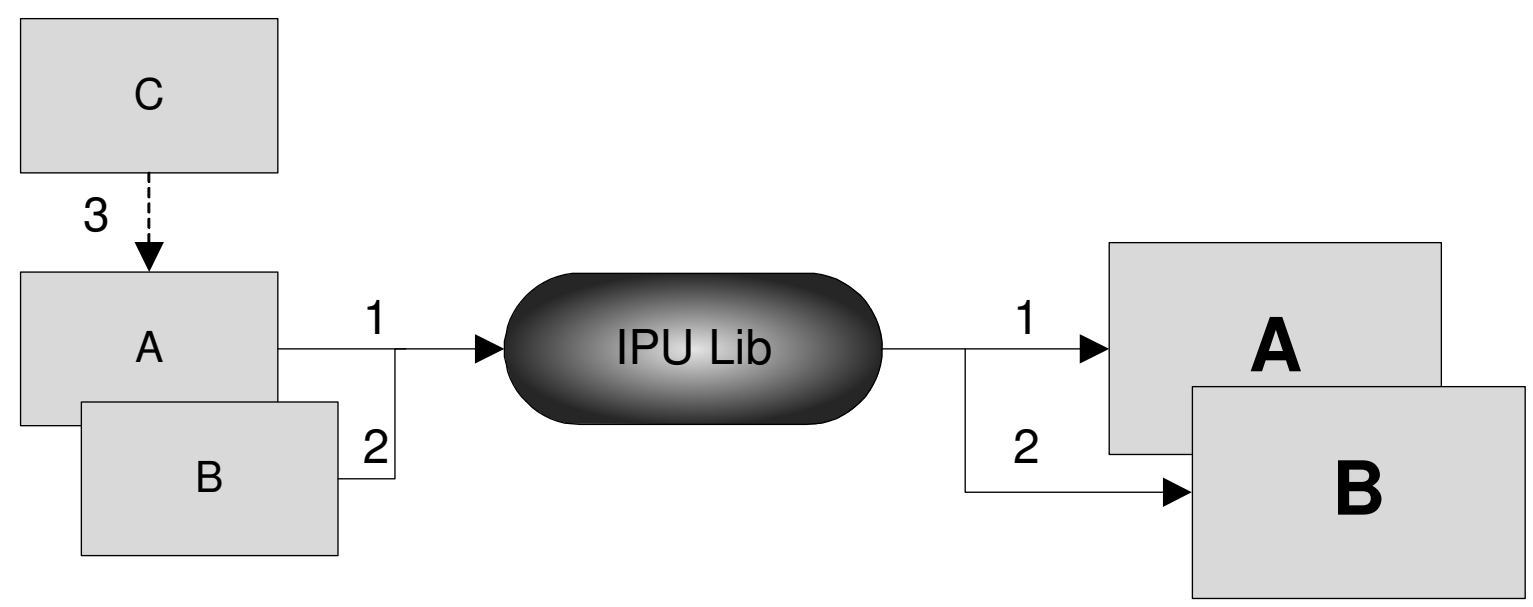

Figure 1-6. Double buffer, stream mode example

1.3 Source codes

The source codes of the IPU library are located into `imx-lib` LTIB package, refer to Table 1. To get its source code, run `./ltib -m prep -p imx-lib`

Then “`cd rpm/BUILD/imx-lib-<version>/ipu`”

Table 1. Source codes of the IPU library

File Name	Description
mxc_ipu_hl_lib.h	The headers file of IPU high-level library.
mxc_ipu_hl_lib.c	The source code of IPU high-level library
mxc_ipu_lib.c	The source code of IPU basic library implementation

1.4 Data types

1.4.1 Task mode

```
enum {
      TASK_ENC_MODE = 0x1,
      TASK_VF_MODE = 0x2,
```

```
      TASK_PP_MODE = 0x4,
      OP_NORMAL_MODE = 0x10,
      OP_STREAM_MODE = 0x20,
};
```

There are 3 time-sharing tasks in the IPU hardware: ENC, VF and PP. Those tasks are user selectable. Normally, one input with two outputs feature needs both `TASK_ENC_MODE` and `TASK_VF_MODE` enabled; and for other features, `TASK_ENC_MODE` and `TASK_VF_MODE` can not be used simultaneously.

User can choose `OP_NORMAL_MODE` for single buffer and `OP_STREAM_MODE` for double buffer mode.

1.4.2 Input buffer parameter

```
typedef struct {
        unsigned int width;
        unsigned int height;
        unsigned int fmt;

        struct {
                struct mxcfb_pos pos;
                unsigned int win_w;
                unsigned int win_h;
        } input_crop_win;

        dma_addr_t user_def_paddr[2];
} ipu_lib_input_param_t;
```

These settings include input buffer's basic setting like `width`, `height` and `fmt`, it should be used `FOURCC` type to define format.

`input_crop_win` defines the input crop window from input buffer.

To allocate the input buffer `user_def_paddr must be defined`, this parameter should be user allocated input buffer's physical address, and for `OP_STREAM_MODE`, two `user_def_paddr` should be specified.

1.4.3 Overlay buffer parameter

```
typedef struct {
        unsigned int width;
        unsigned int height;
        unsigned int fmt;

        struct {
                struct mxcfb_pos pos;
                unsigned int win_w;
                unsigned int win_h;
        } ov_crop_win;

        dma_addr_t user_def_paddr[2];

        unsigned char alpha_en;
        unsigned char key_color_en;
        unsigned char alpha; /* 0 ~ 255*/
        unsigned int key_color; /* RBG 24bit */
} ipu_lib_overlay_param_t;
```

Similar process is followed for the input buffer parameter.

To get overlay it should be enabled at least one of the alpha blending or color key.

1.4.4 Output buffer parameter

```
typedef struct {
        unsigned int width;
        unsigned int height;
        unsigned int fmt;
        unsigned int rot;

        dma_addr_t user_def_paddr[2];

        int show_to_fb;
        struct {
                struct mxcfb_pos pos;
```

```
                unsigned int fb_num;
        } fb_disp;

        /* output_win is doing similar thing as fb_disp */
        /* they output data to part of the whole output */
        struct {
                struct mxcfb_pos pos;
                unsigned int win_w;
                unsigned int win_h;
        } output_win;
} ipu_lib_output_param_t;
```

The `rot` parameter defines the rotation that this output buffer should be done, the different rotation number represents:

```
        IPU_ROTATE_NONE = 0,
        IPU_ROTATE_VERT_FLIP = 1,
        IPU_ROTATE_HORIZ_FLIP = 2,
        IPU_ROTATE_180 = 3,
        IPU_ROTATE_90_RIGHT = 4,
        IPU_ROTATE_90_RIGHT_VFLIP = 5,
        IPU_ROTATE_90_RIGHT_HFLIP = 6,
        IPU_ROTATE_90_LEFT = 7,
```

Set `show_to_fb` to display output to frame buffer directly, if so, user can set `fb_disp` to choose the frame buffer device that wants to display (`fb_num`) and the display position in the primary display device.

If user does not enable `show_to_fb`, then user can define `output_win` to do output window crop.

1.4.5 IPU task handle

```
typedef struct {
        void * inbuf_start[2];
        void * ovbuf_start[2];
        void * outbuf_start0[2];
        void * outbuf_start1[2];
        int ifr_size;
```

```
        int ovfr_size;
        int ofr_size[2];

        void * priv;
} ipu_lib_handle_t;
```

This `handle` will be returned after `mxc_ipu_lib_task_init` function call. If user does not define `user_def_paddr` of input/overlay/output buffer, then user can get virtual address of input/overlay/output buffer by `inbuf_start/ovbuf_start/outbuf_startx` which is allocated by IPU library.

The `ifr_size/ovfr_size/ofr_size` indicates the size of input/overlay/output buffer.

`priv` parameter should not be changed.

1.5 APIs

1.5.1 mxc_ipu_lib_task_init

```
/*!
 * This function init the ipu task according to param setting.
 *
 * @param     input          Input parameter for ipu task.
 *
 * @param     overlay        Overlay parameter for ipu task.
 *
 * @param     output0        The first output parameter for ipu task.
 *
 * @param     output1        Ipu can support 2 output after post process
 *                           from 1 input, this is second one's setting.
 *                           If user wants 2 outputs both display to fb,
 *                           please make sure output0 is on fb0.
 *
 * @param     mode           The ipu mode user can define, refer to
 *                           header file.
 *
 * @param     ipu_handle     User just allocates this structure for init.
 *                           this parameter will provide some necessary
 *                           info after task init function.
```

```
 *
 * @return      This function returns 0 on success or negative error code on
 *              fail.
 */
int mxc_ipu_lib_task_init(ipu_lib_input_param_t * input,
                ipu_lib_overlay_param_t * overlay,
                ipu_lib_output_param_t * output0,
                ipu_lib_output_param_t * output1,
                int mode, ipu_lib_handle_t * ipu_handle);
```

1.5.2 mxc_ipu_lib_task_update

```
/*!
* This function updates the buffer for special ipu task, it must be run after
* init function.
*
* For OP_STREAM_MODE mode, ipu task will take double buffer method, this
* function will return the next need-update buffer index number (0 or 1) on
* success, user should update input buffer according to it.
* Similar with it, output_callback's second parameter indicates the current
* output buffer index number(0 or 1), user should read output data from exact
* buffer according to it.
*
* For OP_NORMAL_MODE mode, ipu task will take single buffer method, so this
* function will always return 0 on success(next update buffer will keep on
* index 0), the same, output_callback's second parameter will keep on 0 too.
*
* How to update input buffer? If user has phys buffer themselves, please just
* update the phys buffer address by parameter phyaddr; if not, user can fill
* the input data to ipu_handle->inbuf_start[].
*
* @param       ipu_handle      The ipu task handle need to update buffer.
*
* @param       new_inbuf_paddr User can set phyaddr to their own allocated
*                              buffer addr, ipu lib will update the buffer
*                              from this address for process. If user do not
*                              want to use it, please let it be zero, and
*                              fill the buffer according to inbuf_start
*                              parameter in ipu_handle.
*
```

```
* @param       new_ovbuf_paddr User defined overlay physical buffer address.
*
* @param       output_callback IPU lib will call output_callback function
*                              when there is output data.
*
* @param       output_cb_arg   The argument will be passed to output_callback.
*
* @return      This function returns the next update buffer index number on
*              success or negative error code on fail.
*/
int mxc_ipu_lib_task_buf_update(ipu_lib_handle_t * ipu_handle,
        dma_addr_t new_inbuf_paddr, dma_addr_t new_ovbuf_paddr,
        void (output_callback)(void *, int), void * output_cb_arg);
```

1.5.3 mxc_ipu_lib_task_uninit

```
/*!
 * This function uninit the ipu task for special ipu handle.
 *
 * @param       ipu_handle      The ipu task handle need to un-init.
 *
 * @return      This function returns 0 on success or negative error code on
 *              fail.
 */
void mxc_ipu_lib_task_uninit(ipu_lib_handle_t * ipu_handle);
```

1.6 Programming guide

1.6.1 How to use IPU library

1. `mxc_ipu_lib_task_init()`. Call `mxc_ipu_lib_task_init()` function with user defined setting.

User could set input/overlay/output setting like width/height/format/input crop/output to frame buffer etc.

User can allocate input, overlay and output buffer by them (must be physically continuous), if buffers are allocated the `user_def_paddr` parameter must be set in `ipu_lib_input_param_t/ipu_lib_overlay_param_t/ipu_lib_output_param_t`.

For `OP_STREAM_MODE` mode, user should set both of `user_def_paddr[2]`, for `OP_NORMAL_MODE` mode user only needs set `user_def_paddr[0]`.

`mxc_ipu_lib_task_init()` will return `inbuf_start/ovbuf_start/outbuf_start` in `ipu_handle` if user did not set `user_def_paddr`, these are virtual buffer start addresses allocated by IPU lib.

User should fill input/overlay data into `user_def_paddr` or `inbuf_start/ovbuf_start` before call function `mxc_ipu_lib_task_buf_update()`.

NOTE:

Overlay is a special function of IPU, which can combine input and overlay to one output based on alpha and color-key setting. Overlay's `width/height` should be the same as output. If user does not want to use overlay function, then just let this parameter to NULL.

2. `mxc_ipu_lib_task_buf_update()`. User should call `mxc_ipu_lib_task_buf_update()` function after finishing fill input/overlay data into input/overlay `user_def_paddr` (user allocated buffer) or `inbuf_start/ovbuf_start` (IPU lib allocated buffer).

At first time calling this update function, for `OP_STREAM_MODE` mode, user should fill data to both input buffer `inbuf_start[2]`, for `OP_NORMAL_MODE` mode user only needs to fill `inbuf_start[0]`; next time calling this update function, user only needs to fill buffer according to the index return by `mxc_ipu_lib_task_buf_update()` last time.

Above method is using buffers allocated by IPU lib but buffers can also be user allocated:

User defined buffer queue example (`OP_STREAM_MODE` mode):

a) user allocates 5 physically continuous memory buffers: `paddr[0~4]`;

b) set `input.user_def_paddr[2]` as `paddr[0]` and `paddr[1]`;

c) call `mxc_ipu_lib_task_init()`;

d) fill input data to `paddr[0]` and `paddr[1]`;

e) call `mxc_ipu_lib_task_buf_update()`;

f) fill input data to `paddr[2]`;

g) call `mxc_ipu_lib_task_buf_update`(..`&paddr[2]`..);

In `mxc_ipu_lib_task_buf_update()` function, IPU lib will call `output_callback(void *arg, int output_buf_index)`(if user sets this call back function in parameter) while there is output data, user could handle output data by `paddr[output_buf_index]/outbuf_start[output_buf_index]`.

3. `mxc_ipu_lib_task_uninit()`

User should call `uninit` function to disable IPU task.

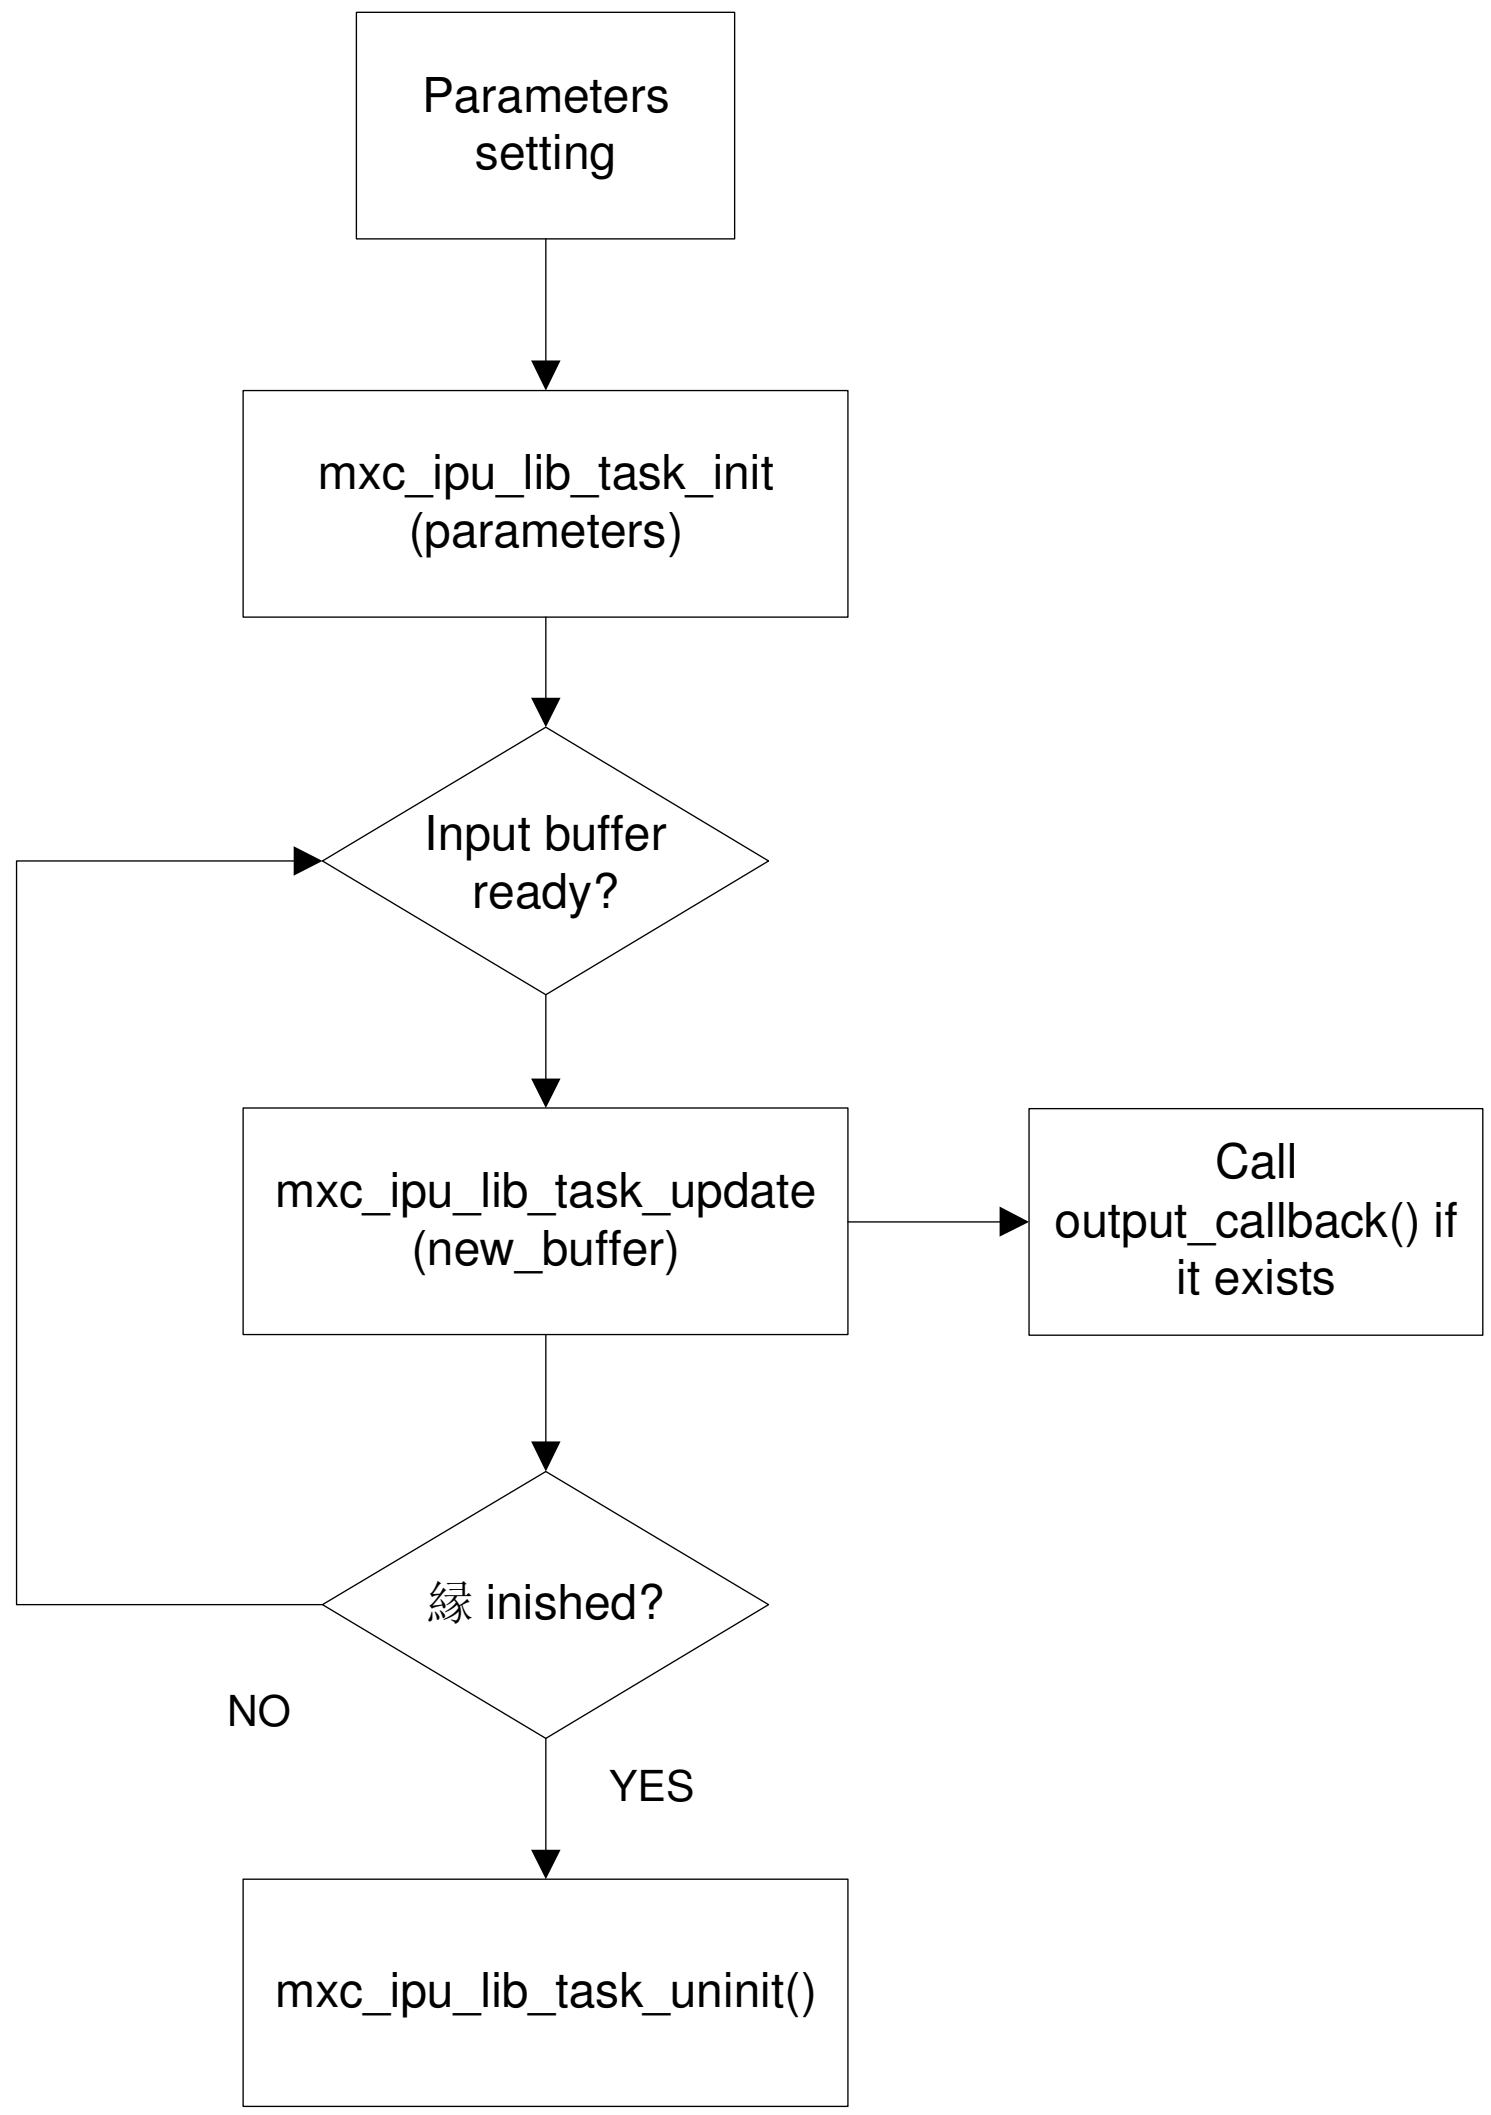

Figure 1-7. Simple calling flow of IPU Lib functions

1.6.2 Unit test

Refer to `test/mxc_ipudev_test/mxc_ipudev_test.c`

`test/mxc_ipudev_test/test_patterns.c`

`test/mxc_ipudev_test/ipudev_config_file`

The usage of this unit test is shown below:

MXC IPU device Test

Usage: `./mxc_ipudev_test.out`

```
-C <config file>

-P <test pattern>

[-bw <block width for pattern 3>]

<input raw file>
```

test pattern:

1. video pattern with user defined dma buffer queue, one full-screen output
2. video pattern with user defined dma buffer queue, with two output
3. hopping block screen save
4. color bar + hopping block
5. color bar IC global alpha overlay
6. color bar IC separate local alpha overlay
7. color bar IC local alpha within pixel overlay
8. ipu dma copy test
9. 2 screen layer test using IC global alpha blending
10. 3 screen layer test using IC global alpha blending
11. 2 screen layer test using IC local alpha blending with alpha value in separate buffer
12. 3 screen layer test using IC local alpha blending with alpha value in separate buffer
13. 2 screen layer test using IC local alpha blending with alpha value in pixel
14. 3 screen layer test using IC local alpha blending with alpha value in pixel
15. 2 screen layer test IPC ProcessA + ProcessB with globla alpha blending
16. 2 screen layer test IPC ProcessA + ProcessB with local alpha blending
17. 3 screen layer test IPC ProcessA (first_layer + sencond_layer) + ProcessB (third_layer) with global alpha blending
18. 3 screen layer test IPC ProcessA (first_layer + sencond_layer) + ProcessB (third_layer) with local alpha blending
19. 3 screen layer test IPC ProcessA (first_layer) ProcessB (sencond_layer) ProcessC (third_layer) with local alpha blending

20. 2 screen layer test IPC ProcessA (first_layer) ProcessB (sencond_layer) with DP local alpha blending
21. 2 screen layer test IPC ProcessA (first_layer) ProcessB (sencond_layer) with local alpha blending plus tv copy

As shown, there are 21 test patterns in `test_patterns.c`. And for other tests, user can also modify `ipudev_config_file`, for example:

The example cmd:

```
# ./mxc_ipudev_test -C ipudev_config_file qvga.yuv
```

The example config file:

```
#####   ipu dev test config file ##########
#
# fourcc ref:
#       RGB565->RGBP
#       BGR24 ->BGR3
#       RGB24 ->RGB3
#       BGR32 ->BGR4
#       BGRA32->BGRA
#       RGB32 ->RGB4
#       RGBA32->RGBA
#       ABGR32->ABGR
#       YUYV  ->YUYV
#       UYVY  ->UYVY
#       YUV444->Y444
#       NV12  ->NV12
#       YUV420P->I420
#       YUV422P->422P
#       YVU422P->YV16
#
# rotation ref:
#       IPU_ROTATE_NONE = 0,
#       IPU_ROTATE_VERT_FLIP = 1,
#       IPU_ROTATE_HORIZ_FLIP = 2,
#       IPU_ROTATE_180 = 3,
#       IPU_ROTATE_90_RIGHT = 4,
#       IPU_ROTATE_90_RIGHT_VFLIP = 5,
```

```
#       IPU_ROTATE_90_RIGHT_HFLIP = 6,
#       IPU_ROTATE_90_LEFT = 7,
#
# mode ref:
#       TASK_ENC = 0x1
#       TASK_VF = 0x2
#       TASK_PP = 0x4
#       NORMAL_MODE = 0x10
#       STREAM_MODE = 0x20

#### mode
mode=0x22

#### operation frame count
fcount=50

#### output1 enable?
output1_enable=0

#### input
in_width=320
in_height=240
in_fmt=I420
#input crop
in_posx=0
in_posy=0
in_win_w=0
in_win_h=0

#### output0
out0_width=320
out0_height=240
out0_fmt=RGBP
out0_rot=0
#output to framebuffer
out0_to_fb=1
out0_fb_num=0
out0_posx=0
out0_posy=0
```

This example uses VF task, stream mode, input file is `qvga.yuv`, and input parameters are 320x240@I420, output parameters are 320x240@RGBP, the output should feed to `framebuffer0`.

Chapter 2 Screen layer library user guide

2.1 Introduction

This chapter presents the screen layer library which is based on IPU library previously described.

The screen layer library:

- Provides user space API to support multi-layer GUI/Video display on Linux platform.
- Provides user space API to support hardware acceleration for image process including color space conversion, resize, rotation, alpha blending, color key etc. by IPU.
- Provides an abstract layer to add more hardware acceleration for device support.

2.2 Data flow

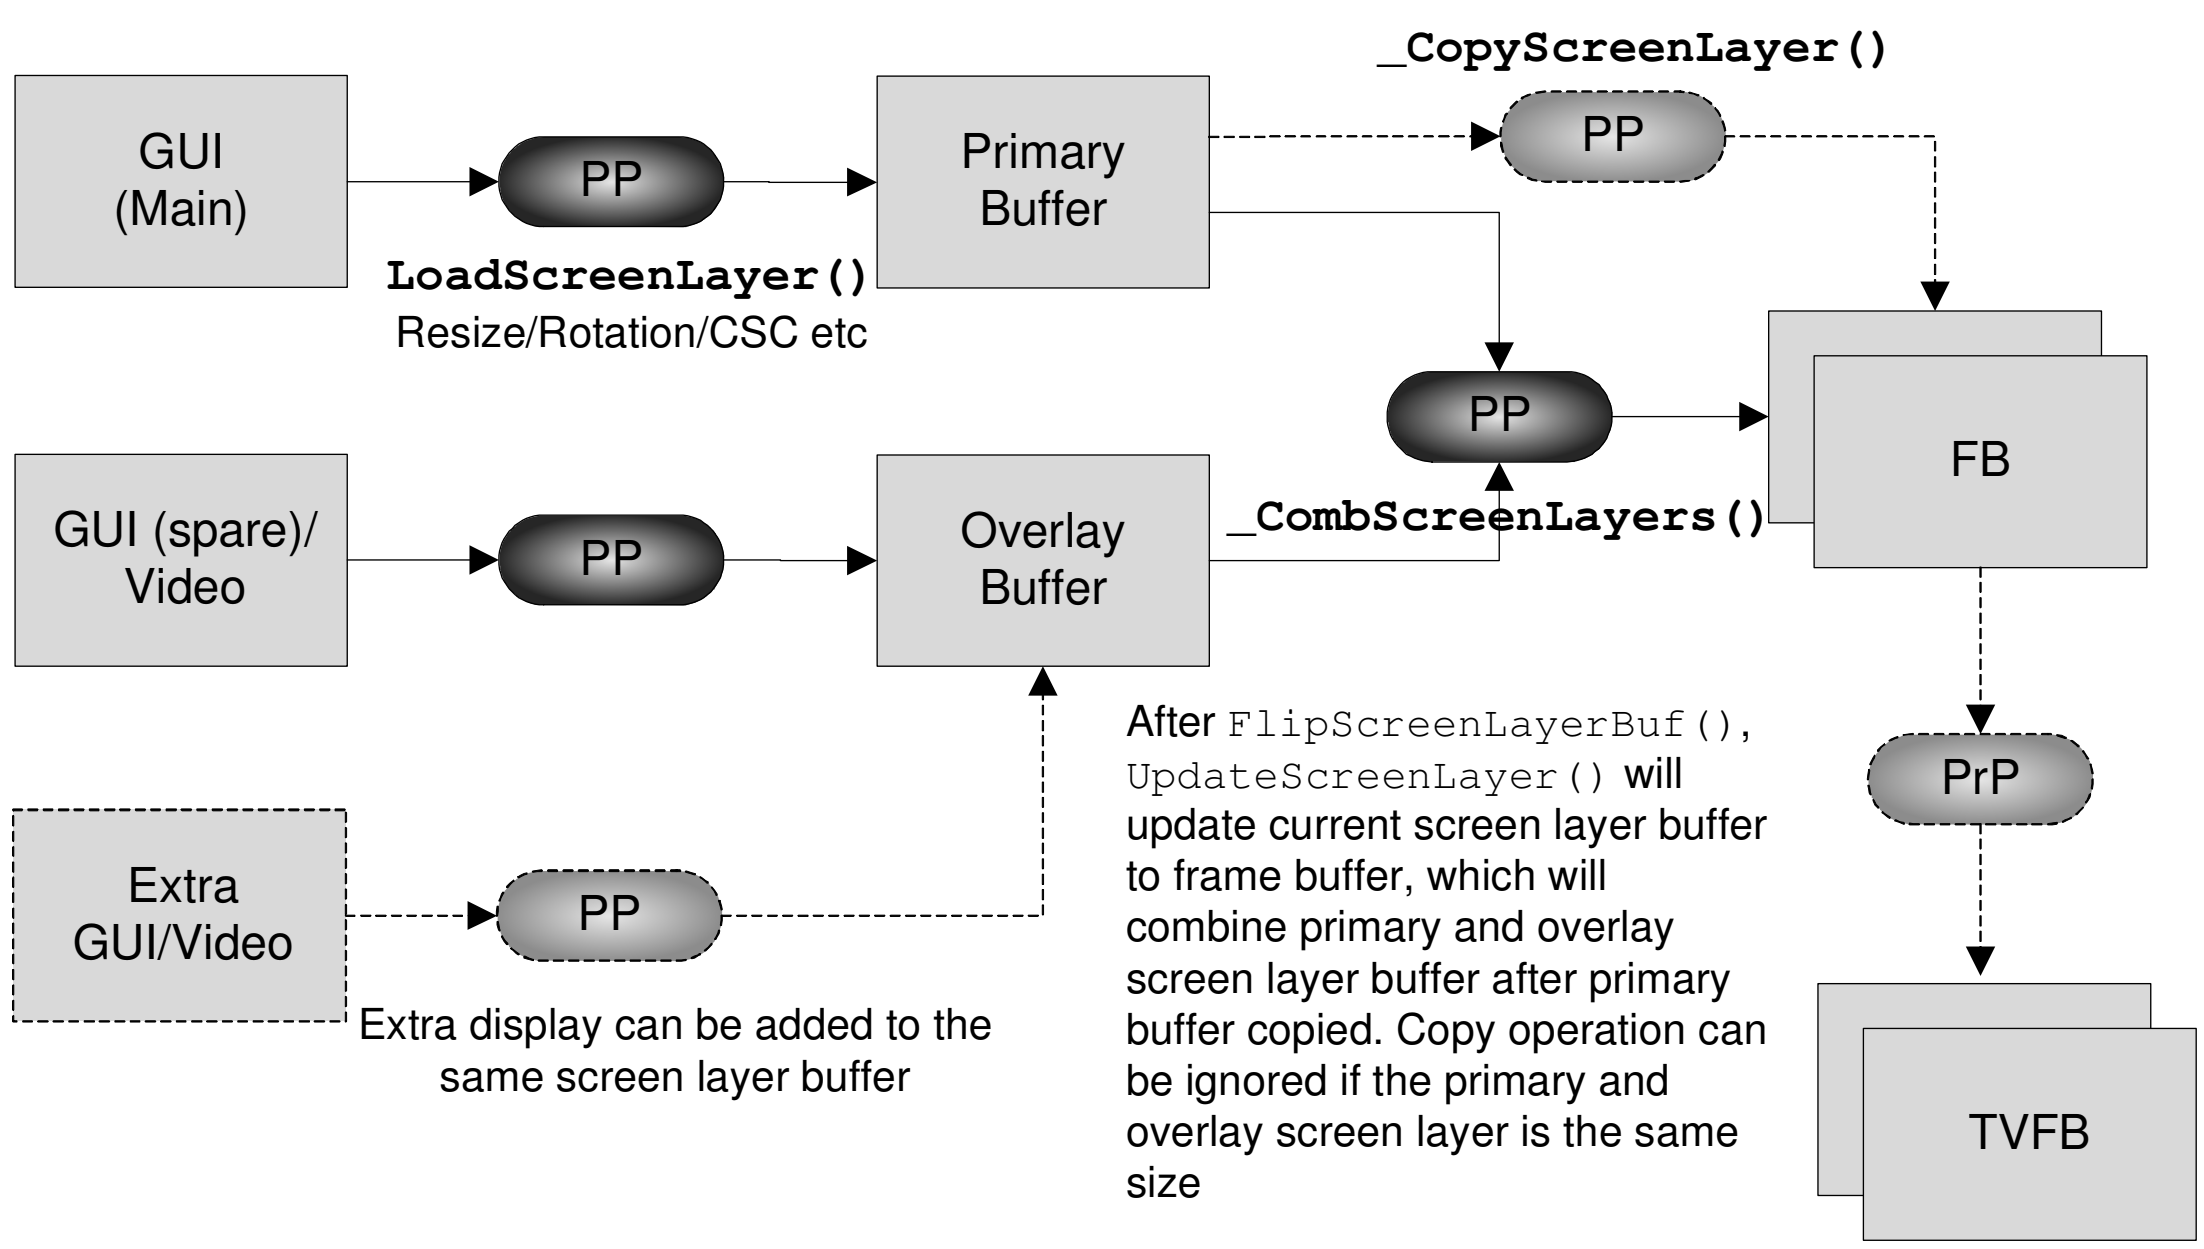

Figure 2-1. Screen Layer lib data flow

2.3 Source codes

The source codes of screen layer library are located into `imx-lib` LTIB package, refer to Table 2. To get the source code, run:

```
./ltib -m prep -p imx-lib
```

Then "`cd rpm/BUILD/imx-lib-<version>/ screenlayer`"

Table 2. Source codes of the screen layer library

File Name	Description
ScreenLayer.h	The header files of screen layer library.
ScreenLayer.c	The source code of screen layer library

2.4 Data types

2.4.1 Ret code

```
typedef enum {
      E_RET_SUCCESS = 0,
      E_RET_DEV_FAIL,
      E_RET_WRONG_FMT,
      E_RET_MEM_ALOC_FAIL,
      E_RET_MMAP_FAIL,
      E_RET_PRIMARY_ERR,
      E_RET_RECT_OVERFLOW,
      E_RET_BUFIDX_ERR,
      E_RET_TASK_SETUP_ERR,
      E_RET_TASK_RUN_ERR,
      E_RET_FLIP_ERR,
      E_RET_NOSUCH_METHODTYPE,
      E_RET_DESTORY_PRI_WITH_SUBSL,
      E_RET_ALPHA_BLENDING_CONFLICT,
      E_RET_LOCAL_ALPHA_BLENDING_DISABLE,
      E_RET_ALPHA_BUF_NOT_ALLOC_ERR,
      E_RET_IPC_SEM_OPEN_FAILED,
      E_RET_IPC_SHM_FAILED,
} SLRetCode;
```

This `enum` define the return code of screen layer APIs.

2.4.2 Screen rectangle

```
typedef struct {
       u16    left;
       u16    top;
       u32    right;
       u32    bottom;
} SLRect;
```

2.4.3 Screen layer

```
typedef struct {
         SLRect         screenRect;
         u32            fmt;
         u32            bufSize;
         u32            bufAlphaSize;
         bool           supportSepLocalAlpha;
         void           ** bufVaddr;
         dma_addr_t     * bufPaddr;
         void           ** bufAlphaVaddr;
         dma_addr_t     * bufAlphaPaddr;
         void           * pPrimary;
         char           fbdev[32];
         u32            flag;
         void           * pPriv;

} ScreenLayer;
```

This is the main structure of the screen layer library, user should set some parameters before creating a screen layer.

To create primary screen layer, user must set `pPrimary` to NULL, and do not need to set `screenRect` , it is decided by `fbdev` user set.

To create overlay screen layer, user must set its primary screen layer to `pPrimary`, the `screenRect` defines the screen rectangle in its primary screen layer.

If user set `bufPaddr` to NULL, screen layer library will allocate screen layer buffers in create function, `bufVaddr` is the virtual address of the allocated buffer list, `bufPaddr` is the physical address of the allocated buffer list.

If user wants to use buffers allocated by other application, just set `bufPaddr` to his allocated buffer list.

If user enables separate local alpha, `bufAlphaVaddr` is valid for the virtual address of the allocated alpha buffer list, `bufAlphaPaddr` is the physical address of the allocated alpha buffer list.

The same as `bufPaddr`, user can set `bufAlphaPaddr` if he wants to use alpha buffers allocated by other application.

2.4.4 Load parameter

```
typedef struct {
        u32             srcWidth;
        u32             srcHeight;
        u32             srcFmt;
        SLRect          srcRect;
        SLRect          destRect;
        u32             destRot;
        dma_addr_t      srcPaddr;
} LoadParam;
```

This structure is used in `LoadScreenLayer` function; it defines source window and destination window settings.

User must set source buffer's physical address to `srcPaddr` for `LoadScreenLayer`.

User can set `srcRect` to do input crop in a source window (`srcWidth, srcHeight`).

User can also set `destRect` to output a spare window in `dest` screen layer window.

2.4.5 Method setting parameter

```
typedef enum {
       E_SET_ALPHA,
       E_SET_COLORKEY,
       E_ENABLE_LAYER,
       E_COPY_TVOUT,
} SetMethodType

typedef struct {
```

```
        u8      globalAlphaEnable;
        u8      sepLocalAlphaEnable;
        u32     alpha;
} MethodAlphaData;

typedef struct {
        u8      enable;
        u32     keyColor;
} MethodColorKeyData;

typedef struct {
        u8      tvMode;
        u32     lcd2tvRotation;
} MethodTvoutData;
```

These parameters are used to set overlay, user can set local/global alpha and color key.

User can enable copy to TV by `MethodTvoutData`, this parameter should be set only for the screen layer which is being updated.

2.5 APIs

2.5.1 CreateScreenLayer

```
SLRetCode CreateScreenLayer(ScreenLayer *pSL, u8 nBufNum);
```

This function creates one screen layer based on `pSL`'s setting described above.

For one screen layer, it can contain more than one buffer, the define `nBufNum` to create more buffers for this screen layer.

2.5.2 LoadScreenLayer

```
SLRetCode LoadScreenLayer(ScreenLayer *pSL, LoadParam *pParam, u8 nBufIdx);
```

This function fills a screen layer with source image; it will store the result in the buffers allocated by `CreateScreenLayer()` which can also be accessible by user, `nBufIdx` specifies the store buffer index.

IPU will do resize and color space conversion and rotation according to the `pParam`.

2.5.3 UpdateScreenLayer

```
SLRetCode UpdateScreenLayer(ScreenLayer *pSL);
```

This function updates the current buffer of the screen layer to display the frame buffer, the frame buffer is decided by `fbdev` setting during `CreateScreenLayer()`.

When the function updates primary layer, it will also update overlay buffer to LCD. When function updates overlay layer, primary layer will be automatically updated at the same time.

2.5.4 FlipScreenLayerBuf

```
SLRetCode FlipScreenLayerBuf(ScreenLayer *pSL, u8 nBufIdx);
```

This function will set the current buffer of the specified screen layer.

2.5.5 SetScreenLayer

```
SLRetCode SetScreenLayer(ScreenLayer *pSL, SetMethodType eType, void
*setData);
```

This function sets screen layer’s alpha and color key.

2.5.6 DestoryScreenLayer

```
SLRetCode DestoryScreenLayer(ScreenLayer *pSL);
```

2.6 Unit test

Refer to `test/mxc_ipudev_test/mxc_ipudev_test.c`.

`test/mxc_ipudev_test/test_patterns.c (screenlayer_test)`.

Chapter 3 IPU DP module combination

3.1 Introduction

DP is a hardware module in IPU which can do CSC and combination for two frame buffers.

The combination can be done through global alpha or local alpha, both implement by the frame buffer driver.

3.2 Combination IOCTL for fb driver

3.2.1 Definition to alpha structures

```
struct mxcfb_gbl_alpha {
        int enable;
        int alpha;
};

struct mxcfb_loc_alpha {
        int enable;
        unsigned long alpha_phy_addr0;
        unsigned long alpha_phy_addr1;
};
```

3.2.2 DP global alpha combination

To enable DP global alpha combination feature, we need to use `fb ioctl MXCFB_SET_LOC_ALPHA`. A variable in `struct mxcfb_gbl_alpha` type then is needed. The argument `d` of `ioctl` must be an open file descriptor of `/dev/fb*`. By default, `/dev/fb0` stands for the background frame buffer and `/dev/fb2` stands for the foreground frame buffer, that means only `/dev/fb0` and `/dev/fb2` are valid for this `ioctl`. If the open file descriptor of `/dev/fb0` is passed to this `ioctl`, the graphics plane of DP is set to the background plane, otherwise, the graphics plane is set to the foreground plane. The graphics plane always gets the alpha value no matter the alpha type is global or local. If the alpha value is bigger, the graphics plane shows more clearly. In the case of the open file descriptor of `/dev/fb0` is passed to this `ioctl`, and the global alpha value is set to be 255, then the background plane shows itself over the foreground plane.

For example, the following code will enable DP global alpha feature and shows both background plane and the foreground plane:

```
struct mxcfb_gbl_alpha g_alpha;
                g_alpha.alpha = 128;
                g_alpha.enable = 1;
                if (ioctl(fd_fb, MXCFB_SET_GBL_ALPHA, &g_alpha) < 0) {
                        printf("Set global alpha failed\n");
                        close(fd_fb_0);
                        return TFAIL;
                }
```

The argument `fd_fb` is an open file descriptor of `/dev/fb*`.

3.2.3 DP local alpha combination (alpha value is contained in separate buffer)

Similar to DP global alpha combination feature, it is needed to enable DP local alpha combination by calling some `fb ioctl` APIs. The main `ioctl` APIs are `MXCFB_SET_LOC_ALPHA` and `MXCFB_SET_LOC_ALP_BUF`. The `ioctl MXCFB_SET_LOC_ALPHA` is similar to `MXCFB_SET_LOC_ALPHA`. Only `/dev/fb0` and `/dev/fb2` are valid for this `ioctl`.

The graphics plane of DP is determined by the open file descriptor argument. Although the graphics plane can be set to the background plane or the foreground plane, only foreground plane is tested to be set to the graphics plane. The `ioctl` of `MXCFB_SET_LOC_ALPHA` enables the DP local alpha combination and tells the user the physical addresses of the two alpha buffers.

The user needs to do memory map for the two buffers and gets the virtual addresses of the two buffers so that the user can fill the buffers with specific alpha value. The `ioctl` of `MXCFB_SET_LOC_ ALP_BUF` choose one of the two alpha buffers to be active by passing the physical address of the alpha buffer which is returned from the `ioctl` of the

MXCFB_SET_LOC_ALPHA. It is recommended to change the alpha buffer number every time when the user needs to update the alpha buffer.

To enable DP local alpha combination feature with the graphics plane set to be the foreground plane, it is needed to follow these steps:

1. Call the fb ioctl of FBIOPUT_VSCREENINFO to set the var info of the foreground frame buffer:

```
fb2_var.xres = g_display_width;
fb2_var.yres = g_display_height;
fb2_var.xres_virtual = g_display_width;
fb2_var.yres_virtual = g_display_height*2;
if (ioctl(fd_fb_2, FBIOPUT_VSCREENINFO,
          &fb2_var) < 0) {
          printf("Put var of fb2 failed\n");
          close(fd_fb_2);
          return TFAIL;
          }
```

2. Call the fb ioctl of MXCFB_SET_LOC_ALPHA to enable DP local alpha combination feature and get the physical address of the two local alpha buffers:

```
l_alpha.enable = 1;
l_alpha.alpha_phy_addr0 = 0;
l_alpha.alpha_phy_addr1 = 0;
if (ioctl(fd_fb_2, MXCFB_SET_LOC_ALPHA,
          &l_alpha) < 0) {
          printf("Set local alpha failed\n");
          close(fd_fb_2);
          return TFAIL;
}
loc_alpha_phy_addr0 =
          (unsigned long)(l_alpha.alpha_phy_addr0);
loc_alpha_phy_addr1 =
          (unsigned long)(l_alpha.alpha_phy_addr1);
```

3. Memory map the two local alpha buffers so that the user can set the specific alpha value:

```
alpha_buf_size = fb2_var.xres * fb2_var.yres;

alpha_buf0 = (char *)mmap(0, alpha_buf_size,
          PROT_READ | PROT_WRITE,
          MAP_SHARED, fd_fb_2,
          loc_alpha_phy_addr0);
if ((int)alpha_buf0 == -1) {
          printf("\nError: failed to map alpha buffer 0"
                 " to memory.\n");
          close(fd_fb_2);
          return TFAIL;
}
alpha_buf1 = (char *)mmap(0, alpha_buf_size,
          PROT_READ | PROT_WRITE,
          MAP_SHARED, fd_fb_2,
          loc_alpha_phy_addr1);
if ((int)alpha_buf1 == -1) {
         printf("\nError: failed to map alpha buffer 1"
                " to memory.\n");
         munmap((void *)alpha_buf0, alpha_buf_size);
         close(fd_fb_2);
         return TFAIL;
}
```

4. Fill the alpha buffer with specific alpha value and call the `fb ioctl` of `MXCFB_SET_LOC_ALP_BUF` to choose one of the two alpha buffers to be the active alpha buffer. It is recommended to use ping-pang buffer mode:

```
/* The window shows graphics and video planes. */
fill_alpha_buffer(alpha_buf0, 0, 0,
g_display_width, g_display_height, 0x80);

if (ioctl(fd_fb_2, MXCFB_SET_LOC_ALP_BUF, &loc_alpha_phy_addr0) < 0) {
    printf("Set local alpha buf failed\n");
    close(fd_fb_2);
    return TFAIL;
}
```

```
sleep(5);

fill_alpha_buffer(alpha_buf1, 0, 0,
     g_display_width, g_display_height, 0x80);

if (ioctl(fd_fb_2, MXCFB_SET_LOC_ALP_BUF, &loc_alpha_phy_addr1) < 0) {
    printf("Set local alpha buf failed\n");
    close(fd_fb_2);
    return TFAIL;
}
```

3.3 Unit test

The user can test the DP local alpha combination feature (with alpha value contained in separate buffer) by the following tests:

1. V4L2 overlay unit test:

   ```
   /unit_tests/mxc_v4l2_overlay.out -ow 240 -oh 320 -ol 20 -ot 20 -a 1 -d 2 -fg
   ```

2. IPU library unit test:

   ```
   /unit_tests/mxc_ipudev_test.out -P 20
   ```

PN 924-76397 Rev. A