

*Operating
Systems:
Internals
and
Design
Principles*

Chapter 7


Memory

Management

Seventh Edition
William Stallings


Operating Systems: Internals and Design Principles

I cannot guarantee that I carry all the facts in my mind. Intense mental concentration has a curious way of blotting out what has passed. Each of my cases displaces the last, and Mlle. Carère has blurred my recollection of Baskerville Hall. Tomorrow some other little problem may be submitted to my notice which will in turn dispossess the fair French lady and the infamous Upwood.



— *THE HOUND OF THE BASKERVILLES*,
Arthur Conan Doyle

Memory Management Terms

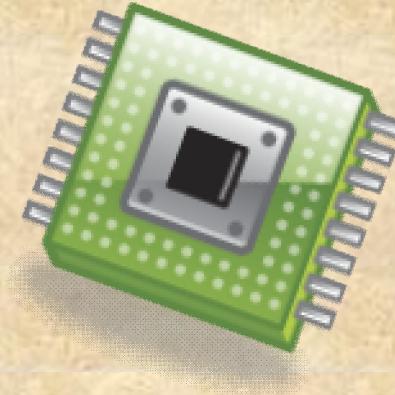


Memory Management Requirements

- Memory management is intended to satisfy the following requirements:
 - Relocation
 - Protection
 - Sharing
 - Logical organization
 - Physical organization



Relocation

- Programmers typically do not know in advance which other programs will be resident in main memory at the time of execution of their program
- Active processes need to be able to be swapped in and out of main memory in order to maximize processor utilization
- Specifying that a process must be placed in the same memory region when it is swapped back in would be limiting
 - may need to *relocate* the process to a different area of memory

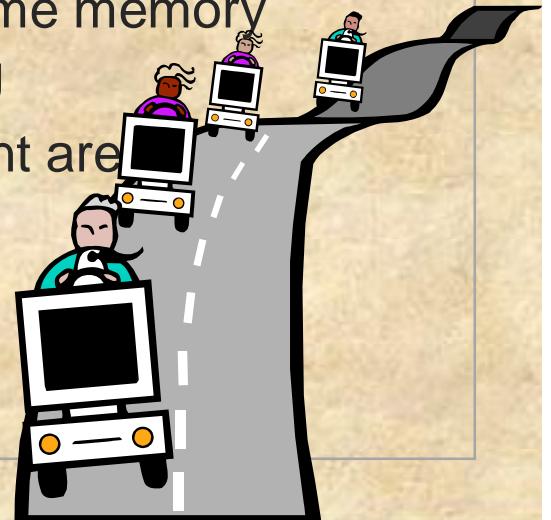

Addressing Requirements

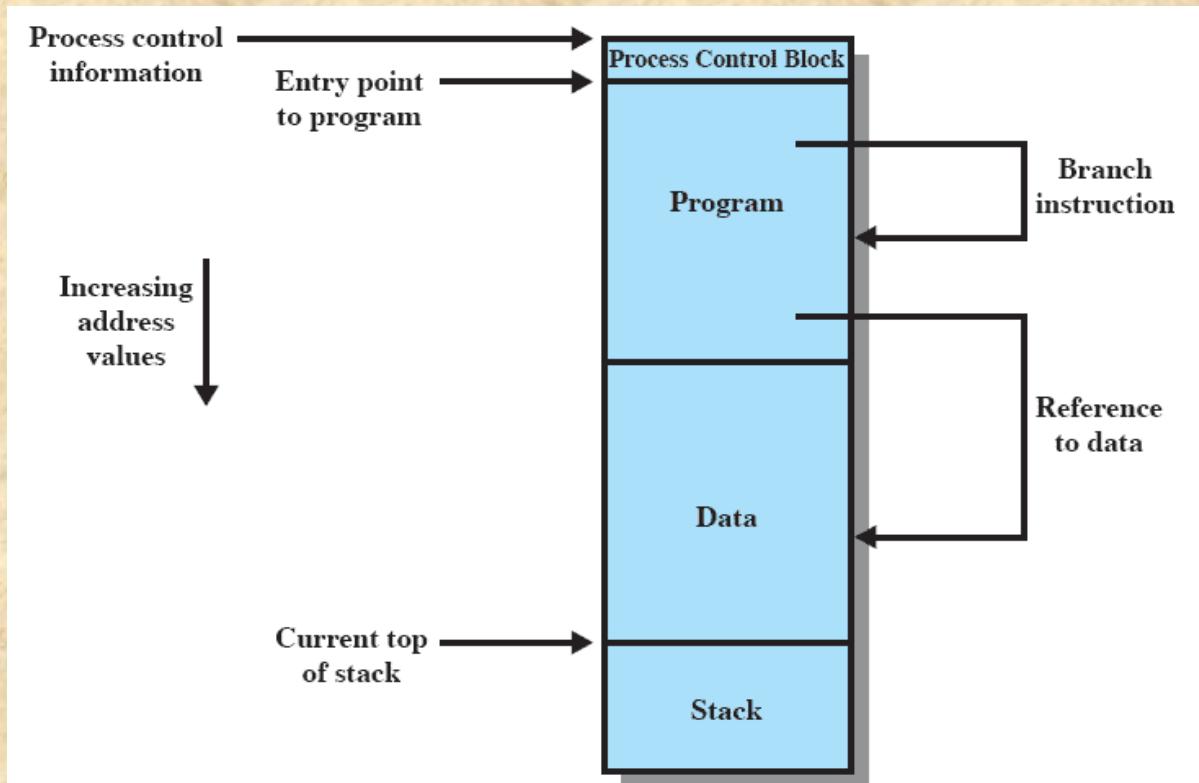


Figure 7.1 Addressing Requirements for a Process


Protection

- Processes need to acquire permission to reference memory locations for reading or writing purposes
- Location of a program in main memory is unpredictable
- Memory references generated by a process must be checked at run time
- Mechanisms that support relocation also support protection



Sharing

- Advantageous to allow each process access to the same copy of the program rather than have their own separate copy
- Memory management must allow controlled access to shared areas of memory without compromising protection
- Mechanisms used to support relocation support sharing capabilities

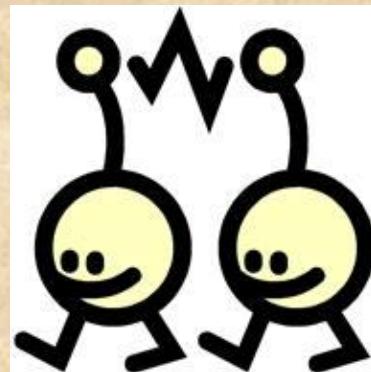

Logical Organization

- Memory is organized as linear

Programs are written in modules

- modules can be written and compiled independently
- different degrees of protection given to modules (read-only, execute-only)
- sharing on a module level corresponds to the user's way of viewing the problem

- Segmentation is the tool that most readily satisfies requirements

Physical Organization

Cannot leave the programmer with the responsibility to manage memory

Memory available for a program plus its data may be insufficient

Programmer does not know how much space will be available

overlays allows various modules to be assigned the same region of memory but is time consuming to program

Memory Partitioning

- Memory management brings processes into main memory for execution by the processor
 - involves virtual memory
 - based on segmentation and paging
- Partitioning
 - used in several variations in some now-obsolete operating systems
 - does not involve virtual memory





Table 7.2

Memory Management Techniques

Fixed Partitioning

- Equal-size partitions
 - any process whose size is less than or equal to the partition size can be loaded into an available partition
- The operating system can swap out a process if all partitions are full and no process is in the Ready or Running state

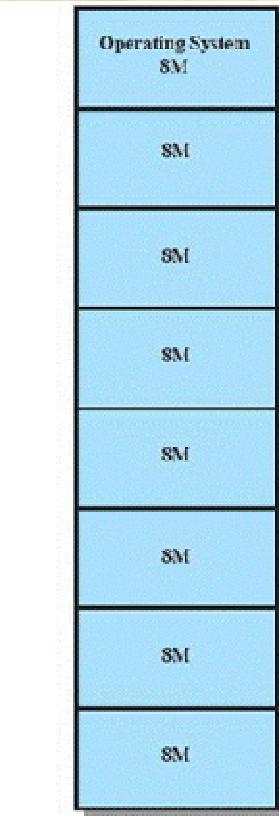

(a) Equal-size partitions


Disadvantages

- A program may be too big to fit in a partition
 - program needs to be designed with the use of overlays
- Main memory utilization is inefficient
 - any program, regardless of size, occupies an entire partition
 - ***internal fragmentation***
 - wasted space due to the block of data loaded being smaller than the partition



Unequal Size Partitions

- Using unequal size partitions helps lessen the problems
 - programs up to 16M can be accommodated without overlays
 - partitions smaller than 8M allow smaller programs to be accommodated with less internal fragmentation

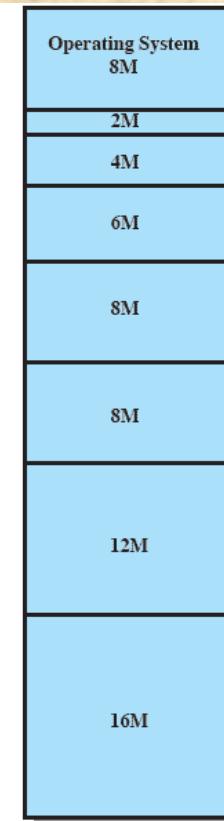

(b) Unequal-size partitions

F
i
x
e
d
P
a
r
t
i
t
i
o
n

Memory Assignment

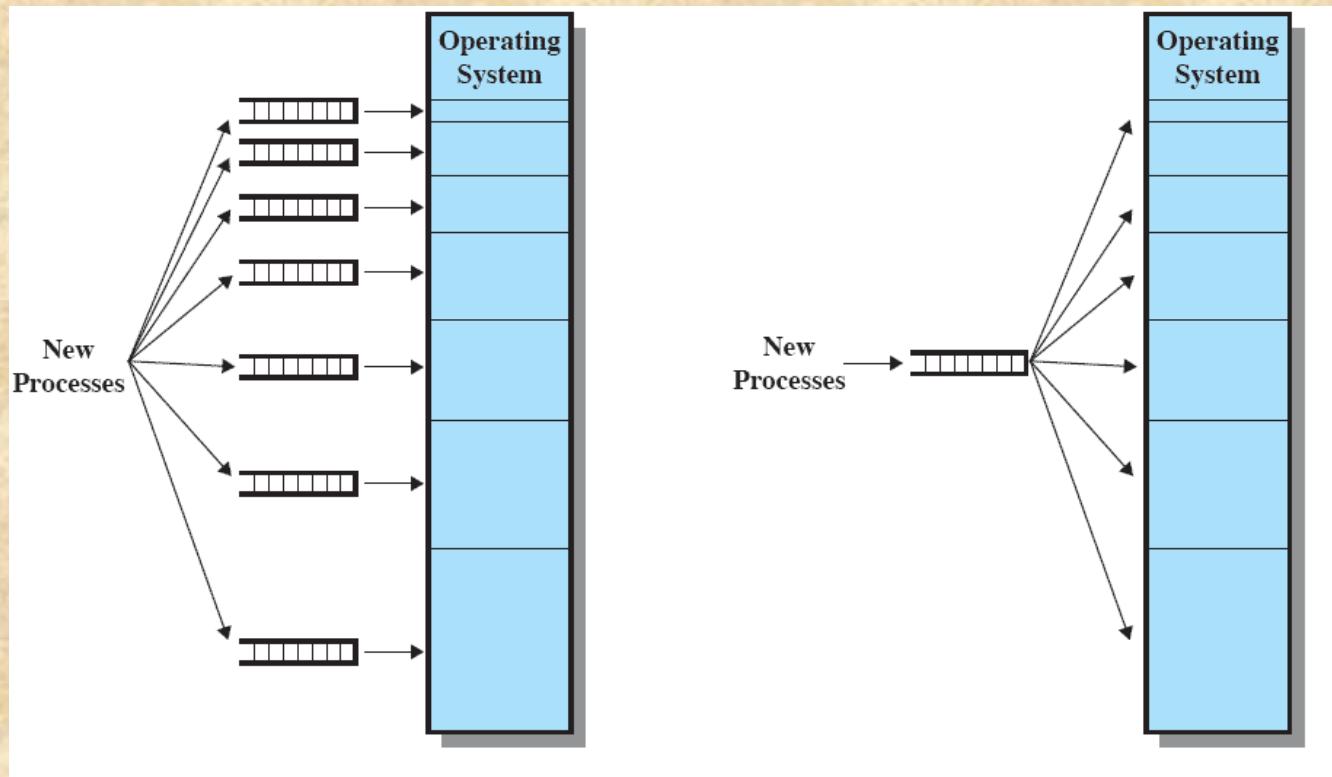


Figure 7.3 Memory Assignment for Fixed Partitioning


Disadvantages

- The number of partitions specified at system generation time limits the number of active processes in the system
- Small jobs will not utilize partition space efficiently



Dynamic Partitioning

- Partitions are of variable length and number
- Process is allocated exactly as much memory as it requires
- This technique was used by IBM's mainframe operating system, OS/MVT

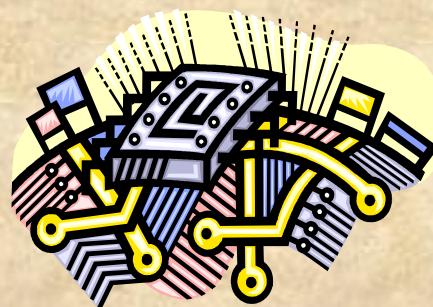

Effect of Dynamic Partitioning

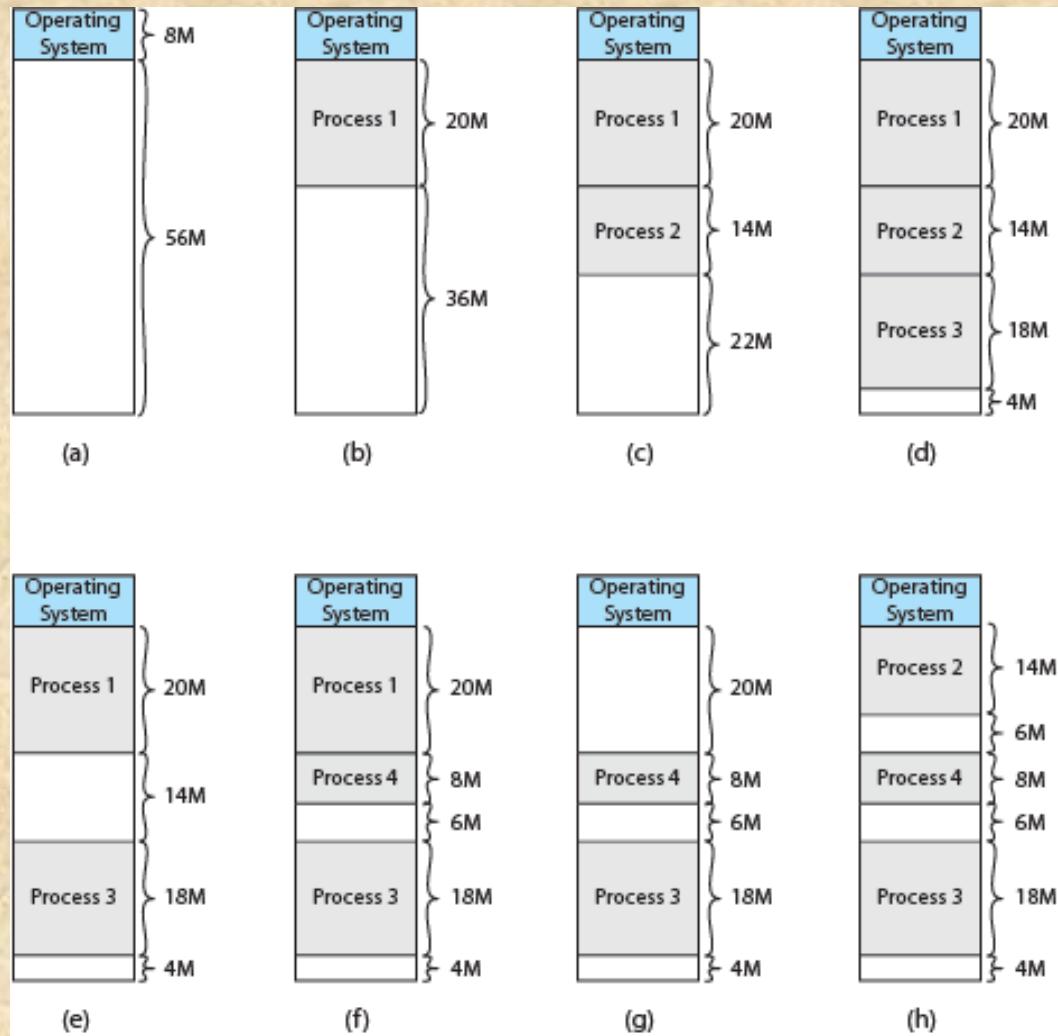


Figure 7.4 The Effect of Dynamic Partitioning

Dynamic Partitioning

External Fragmentation

- memory becomes more and more fragmented
- memory utilization declines

Compaction

- technique for overcoming external fragmentation
- OS shifts processes so that they are contiguous
- free memory is together in one block
- time consuming and wastes CPU time

Placement Algorithms

Best-fit

- chooses the block that is closest in size to the request

First-fit

- begins to scan memory from the beginning and chooses the first available block that is large enough

Next-fit

- begins to scan memory from the location of the last placement and chooses the next available block that is large enough

Memory Configuration Example

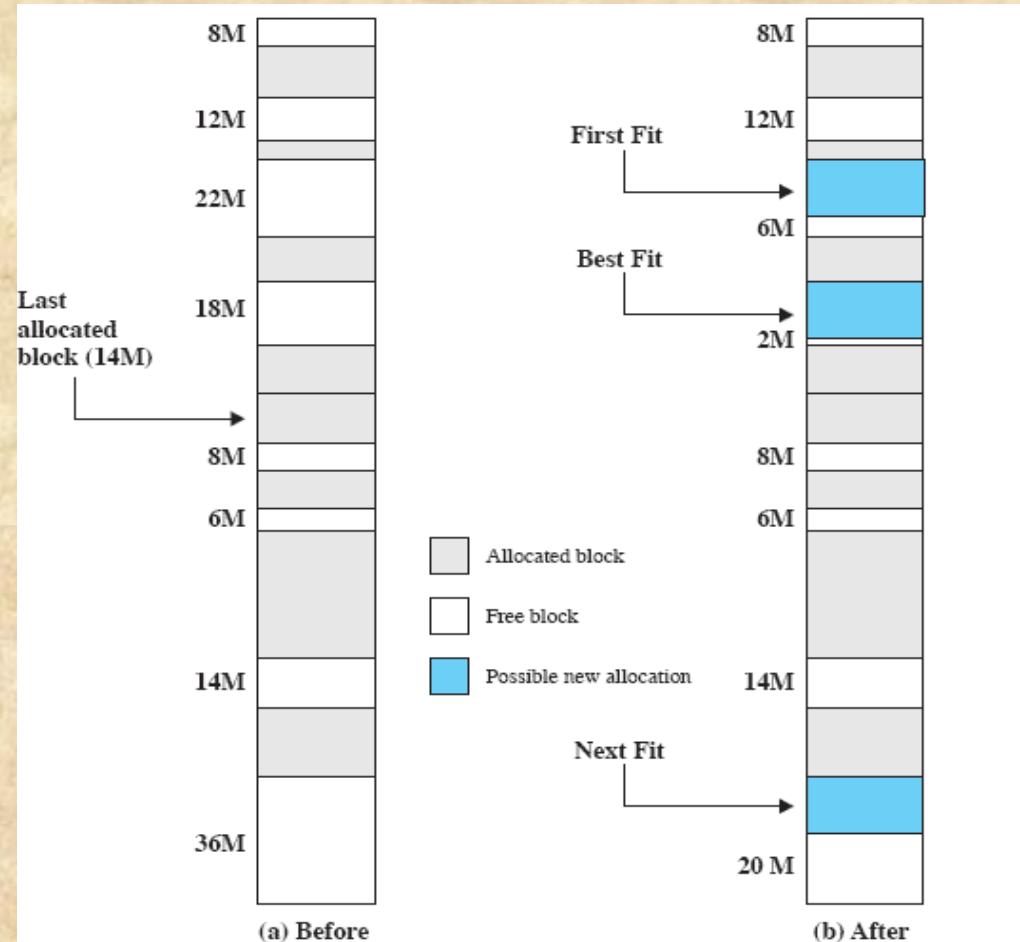


Figure 7.5 Example Memory Configuration before and after Allocation of 16-Mbyte Block

Buddy System

- Comprised of fixed and dynamic partitioning schemes
- Space available for allocation is treated as a single block
- Memory blocks are available of size 2^K words, $L \leq K \leq U$, where
 - 2^L = smallest size block that is allocated
 - 2^U = largest size block that is allocated; generally 2^U is the size of the entire memory available for allocation



Buddy System Example


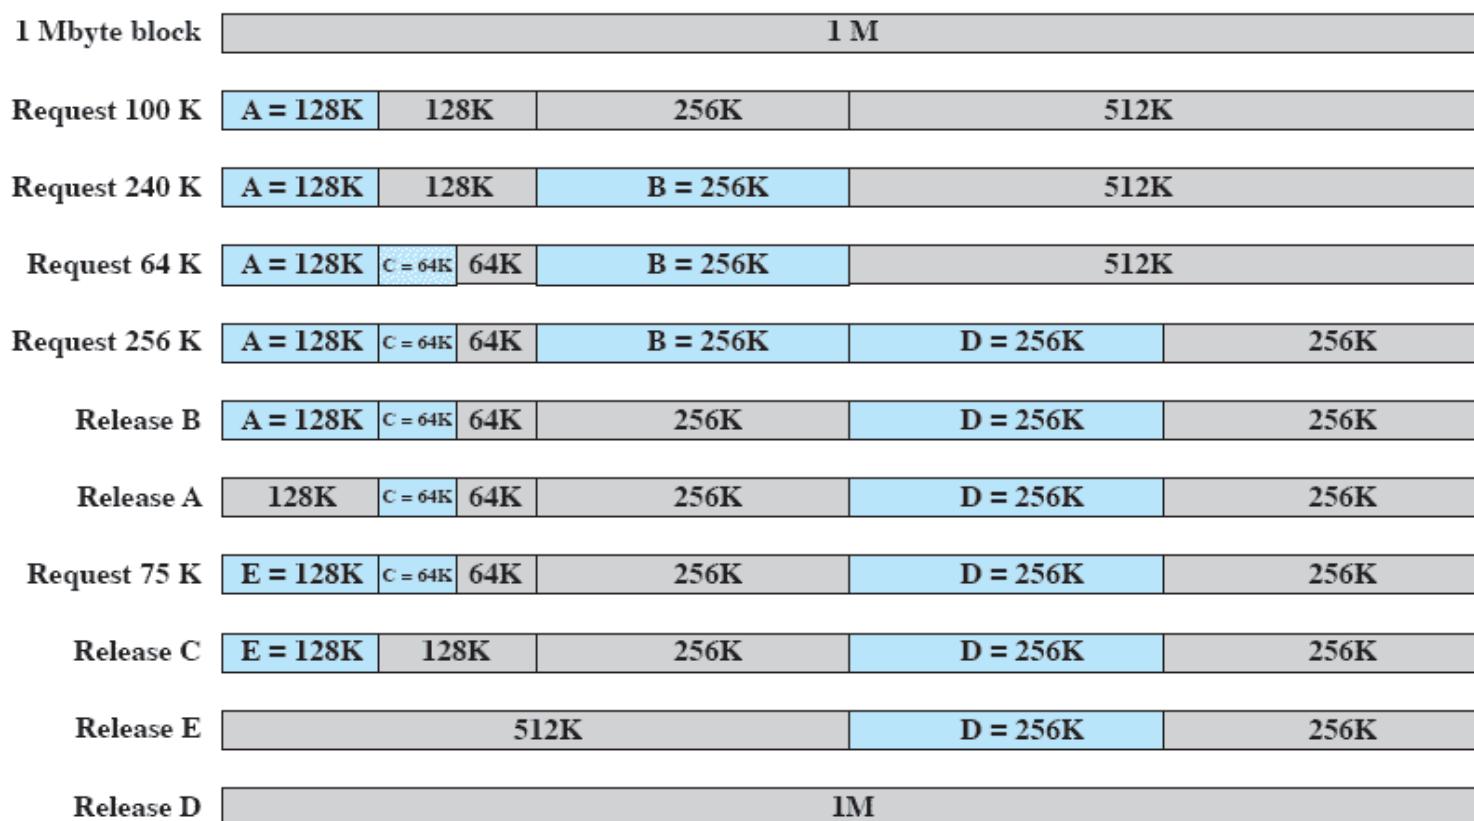


Figure 7.6 Example of Buddy System

T R n
r e t
e p a
e r t
e i
s o
e n

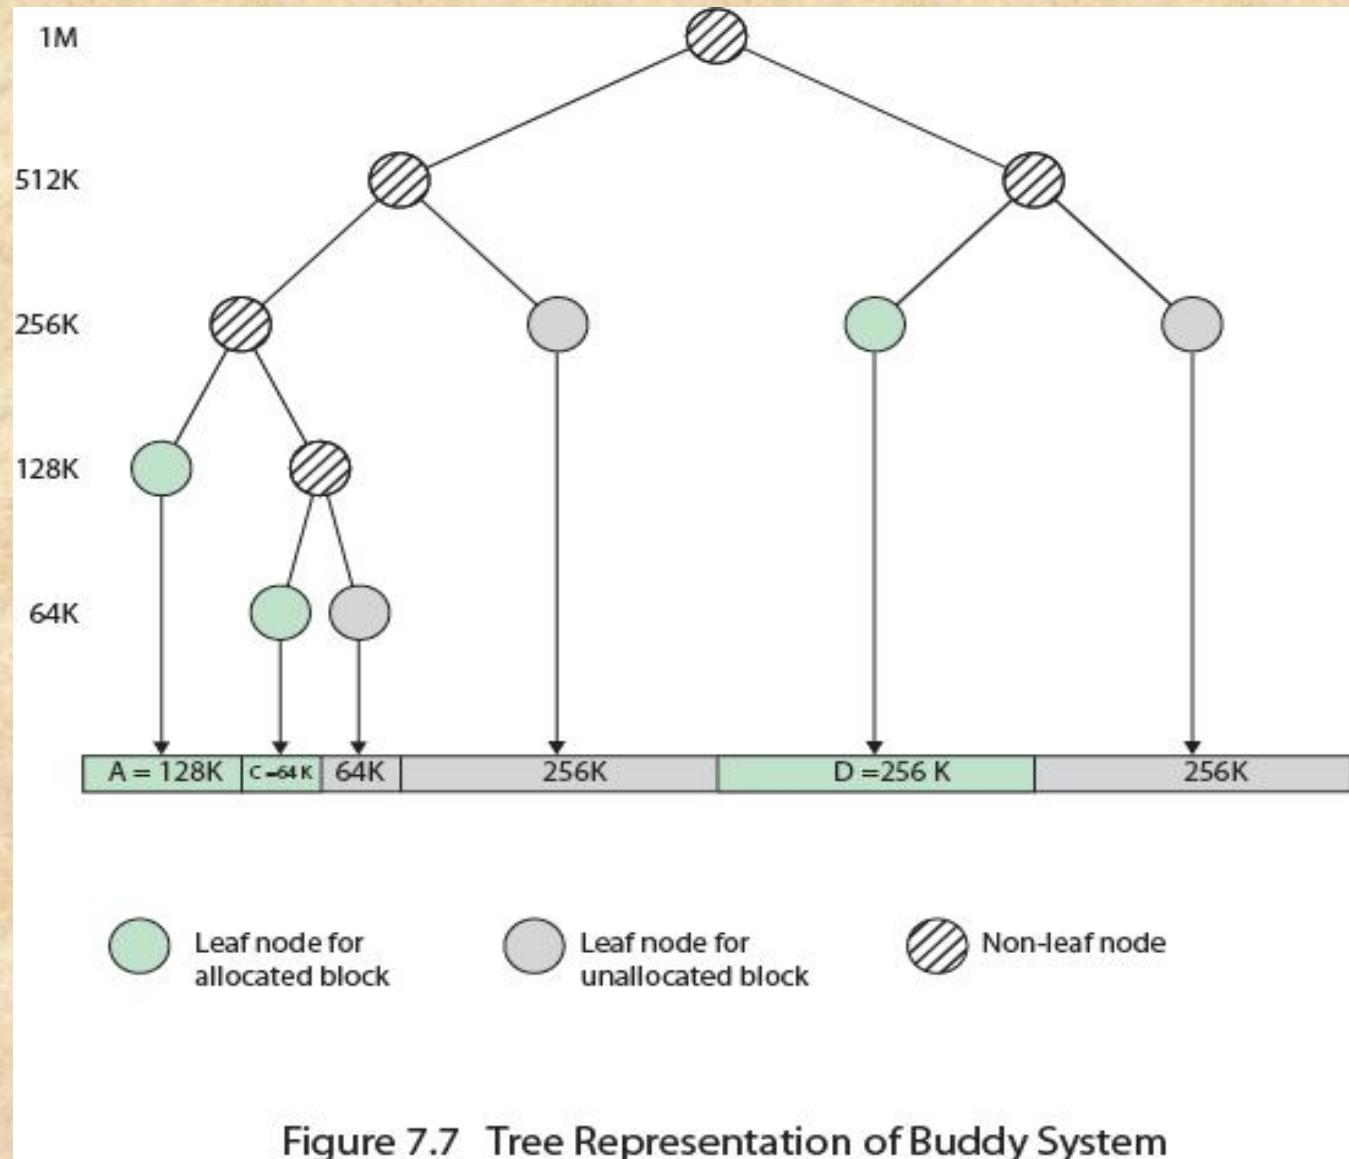

Addresses

Logical

- reference to a memory location independent of the current assignment of data to memory

Relative

- address is expressed as a location relative to some known point

Physical or Absolute

- actual location in main memory

Relocation

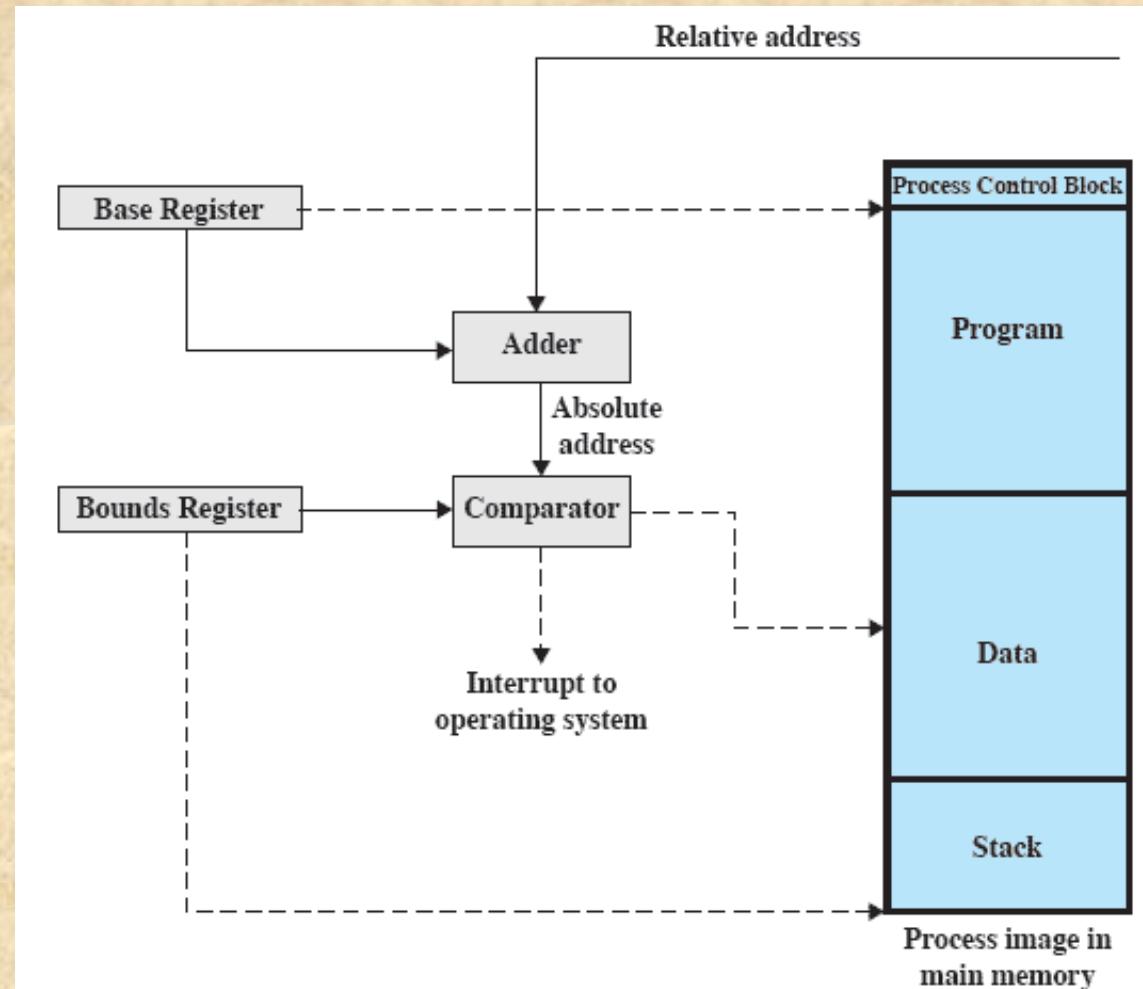


Figure 7.8 Hardware Support for Relocation

Paging

- Partition memory into equal fixed-size chunks that are relatively small
- Process is also divided into small fixed-size chunks of the same size

Pages

- chunks of a process

Frames

- available chunks of memory

Assignment of Process to Free Frames


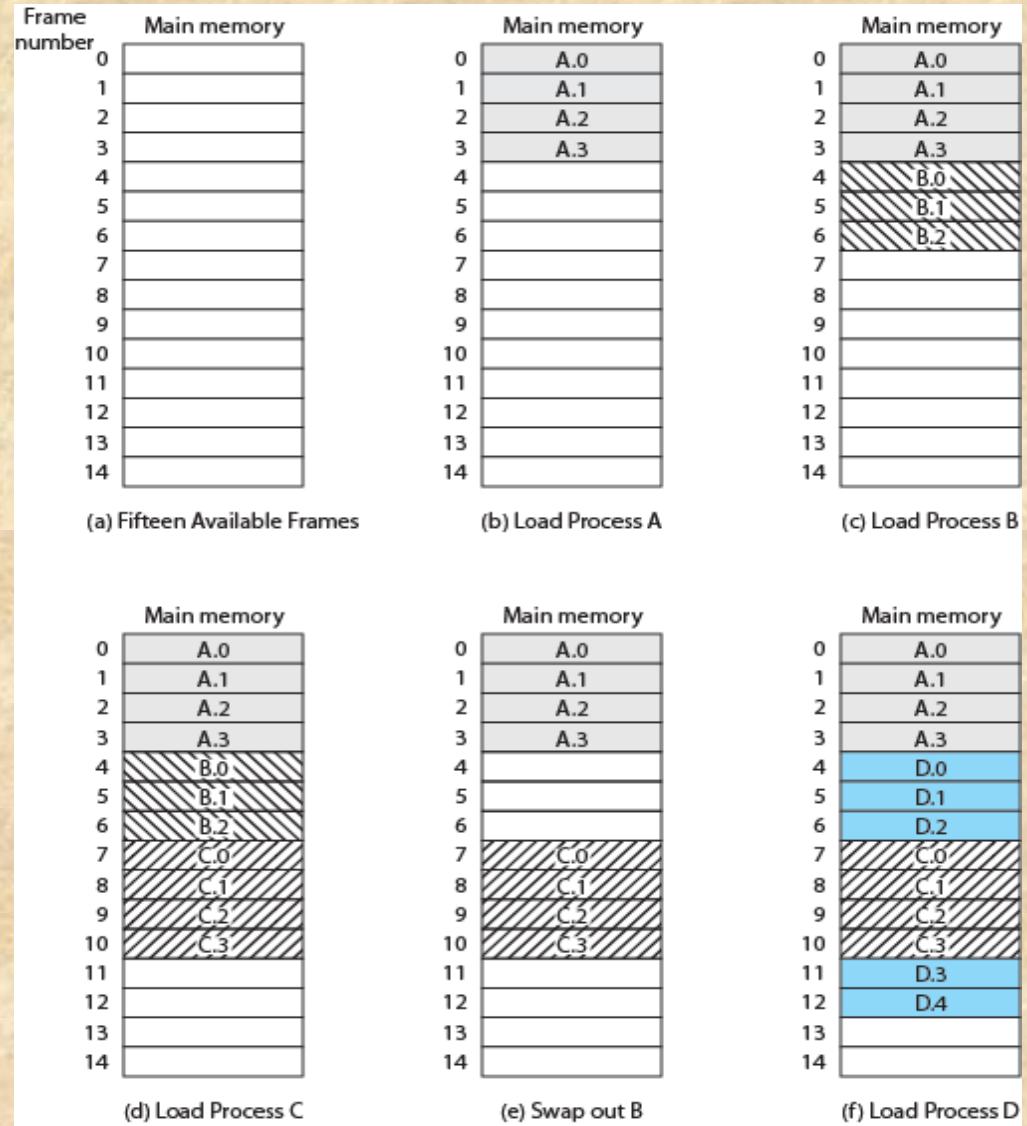


Figure 7.9 Assignment of Process Pages to Free Frames

Page Table

- Maintained by operating system for each process
- Contains the frame location for each page in the process
- Processor must know how to access for the current process
- Used by processor to produce a physical address

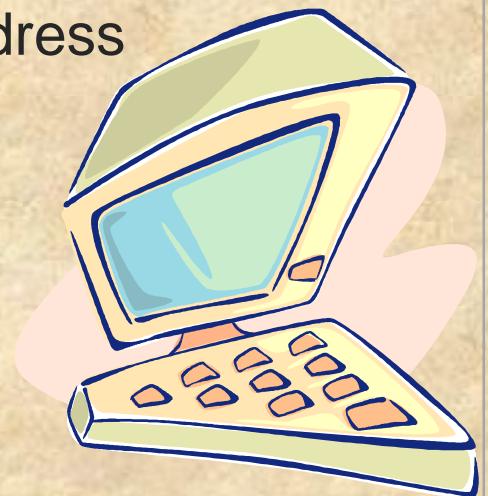

Data Structures

0	0
1	1
2	2
3	3

Process A
page table

0	—
1	—
2	—

Process B
page table

0	7
1	8
2	9
3	10

Process C
page table

0	4
1	5
2	6
3	11
4	12

Process D
page table

13
14

Free frame
list

Figure 7.10 Data Structures for the Example of Figure 7.9 at Time Epoch (f)

Logical Addresses


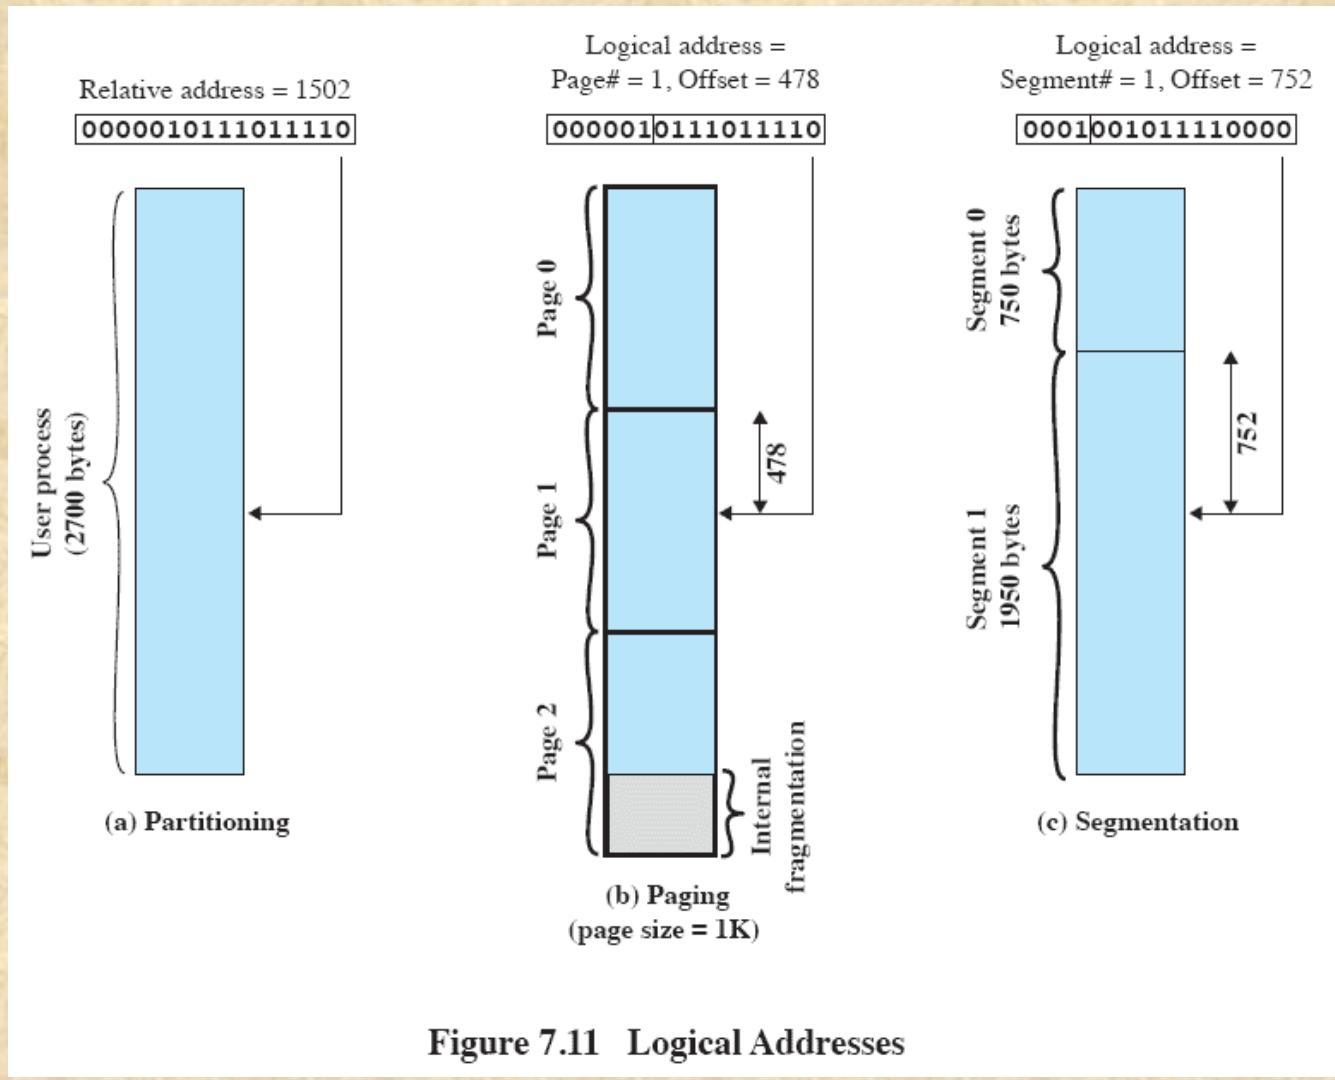



Figure 7.11 Logical Addresses

Logical-to-Physical Address Translation - Paging

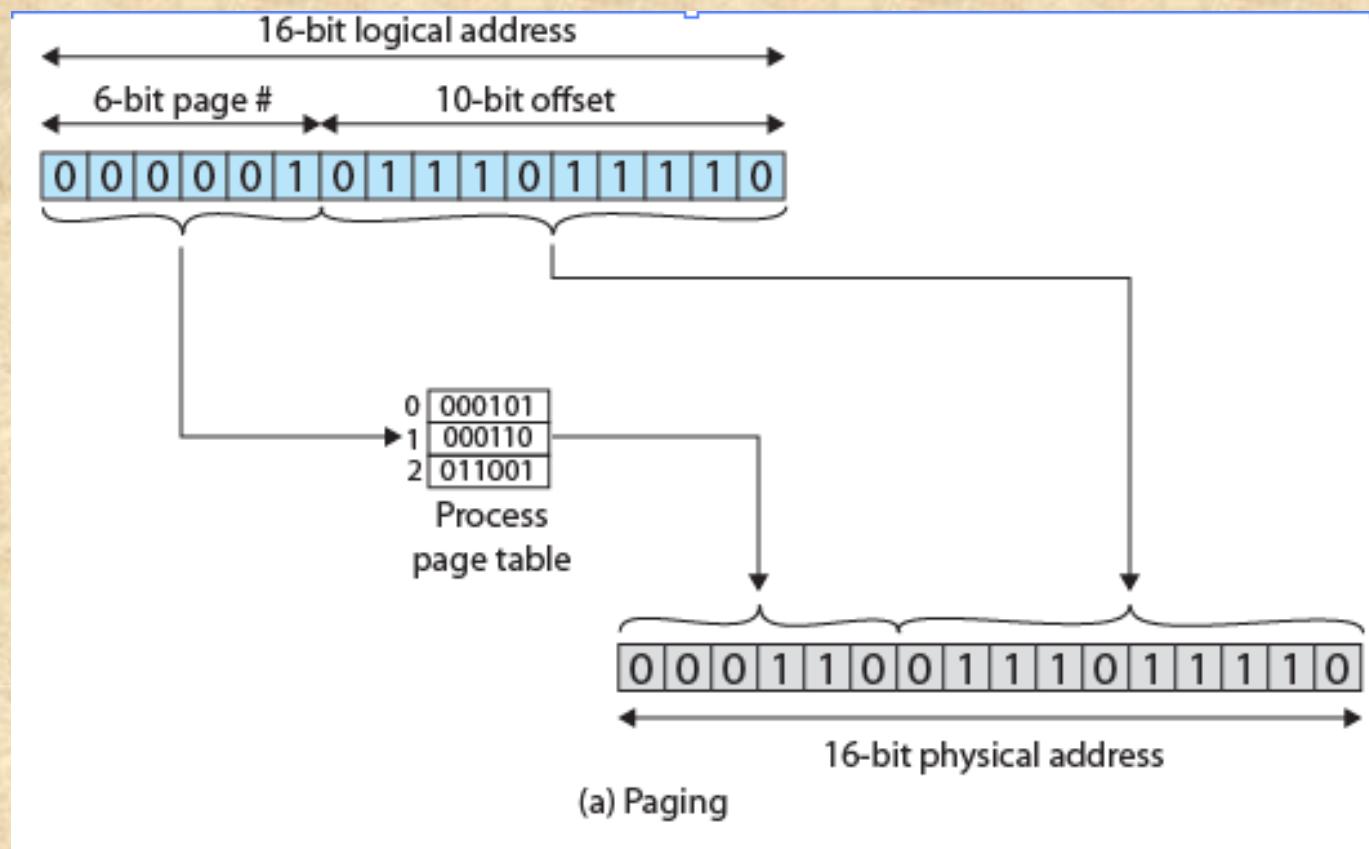


Segmentation

- A program can be subdivided into segments
 - may vary in length
 - there is a maximum length
- Addressing consists of two parts:
 - segment number
 - an offset
- Similar to dynamic partitioning
- Eliminates internal fragmentation

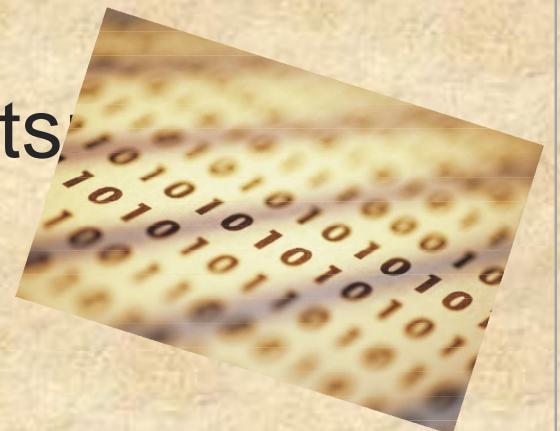

Logical-to-Physical Address Translation - Segmentation

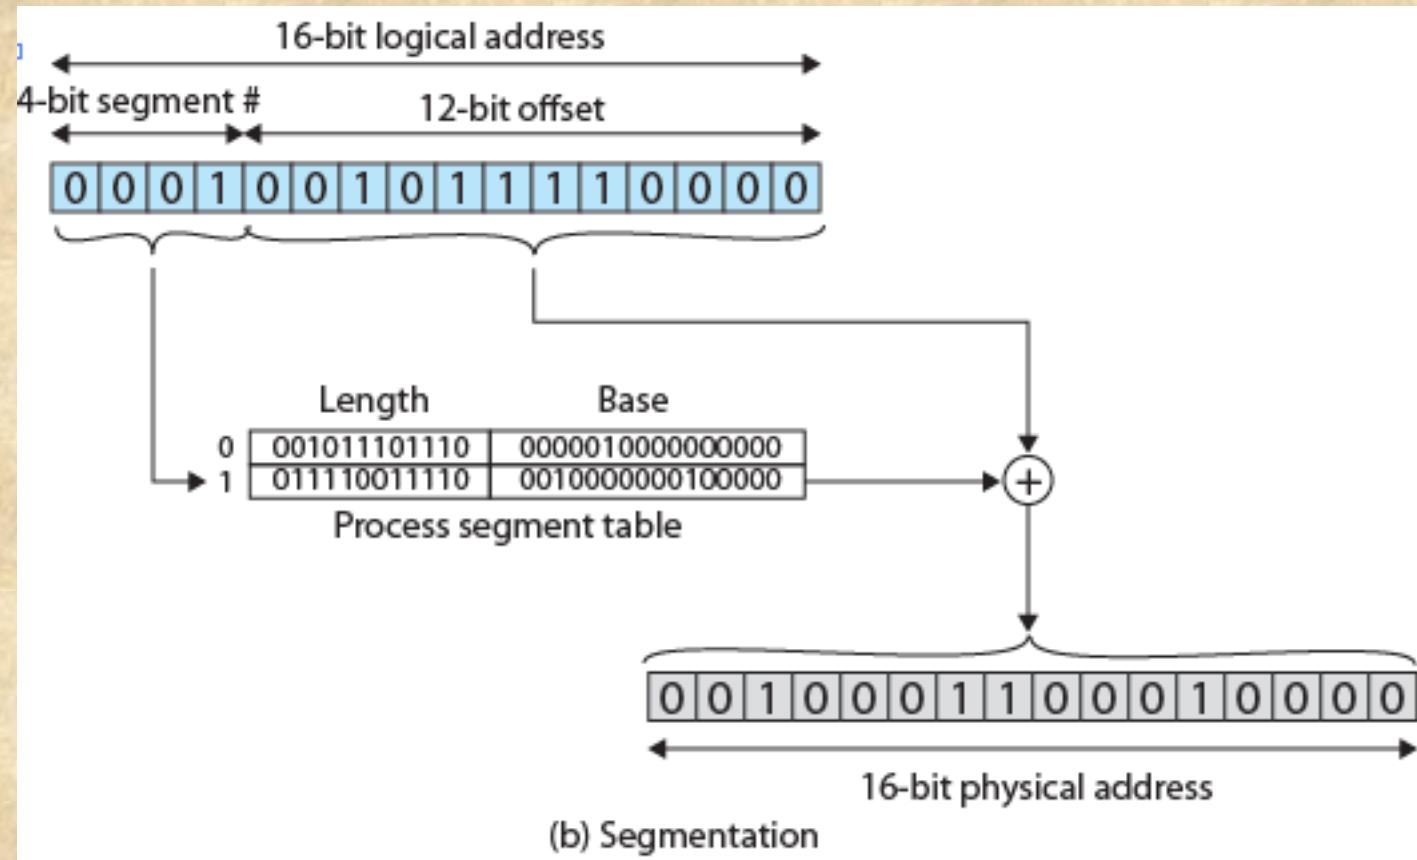

Security Issues



If a process declares that a portion of memory may be shared by other designated processes then the security service of the OS must ensure that only the designated processes have access

If a process has not declared a portion of its memory to be sharable, then no other process should have access to the contents of that portion of memory



Buffer Overflow Attacks

- Security threat related to memory management
- Also known as a buffer overrun
- Can occur when a process attempts to store data beyond the limits of a fixed-sized buffer
- One of the most prevalent and dangerous types of security attacks



Buffer Overflow Example

```
int main(int argc, char *argv[]) {
    int valid = FALSE;
    char str1[8];
    char str2[8];

    next_tag(str1);
    gets(str2);
    if (strncmp(str1, str2, 8) == 0)
        valid = TRUE;
    printf("buffer1: str1(%s), str2(%s), valid(%d)\n", str1, str2, valid);
}
```

(a) Basic buffer overflow C code

```
$ cc -g -o buffer1 buffer1.c
$ ./buffer1
START
buffer1: str1(START), str2(START), valid(1)
$ ./buffer1
EVILINPUTVALUE
buffer1: str1(TVALUE), str2(EVILINPUTVALUE), valid(0)
$ ./buffer1
BADINPUTBADINPUT
buffer1: str1(BADINPUT), str2(BADINPUTBADINPUT), valid(1)
```

(b) Basic buffer overflow example runs

Buffer Overflow Stack Values

Memory Address	Before gets(str2)	After gets(str2)	Contains Value of
.....	
bffffbf4	34fcffbf 4 . . .	34fcffbf 3 . . .	argv
bffffbf0	01000000	01000000	argc
bffffbec	c6bd0340 . . . @	c6bd0340 . . . @	return addr
bffffbe8	08fcffbf . . .	08fcffbf . . .	old base ptr
bffffbe4	00000000	01000000	valid
bffffbe0	80640140 . d . @	00640140 . d . @	
bffffbdc	54001540 T . . @	4e505554 N P U T	str1[4-7]
bffffbd8	53544152 S T A R	42414449 B A D I	str1[0-3]
bffffbd4	00850408 . . .	4e505554 N P U T	str2[4-7]
bffffbd0	30561540 0 V . @	42414449 B A D I	str2[0-3]
.....	

Defending Against Buffer Overflows

- Prevention
- Detecting and aborting
- Countermeasure categories:

Compile-time Defenses

- aim to harden programs to resist attacks in new programs



Run-time Defenses

- aim to detect and abort attacks in existing programs

Summary

■ Memory Management

- one of the most important and complex tasks of an operating system
- needs to be treated as a resource to be allocated to and shared among a number of active processes
- desirable to maintain as many processes in main memory as possible
- desirable to free programmers from size restriction in program development
- basic tools are paging and segmentation (possible to combine)
 - paging – small fixed-sized pages
 - segmentation – pieces of varying size