

Software Requirements Specification for Image Feature Correspondences for Camera Calibration: subtitle describing software

Kiran Singh

2025-02-04

Contents

1	Reference Material	iv
1.1	Table of Units	iv
1.2	Table of Symbols	iv
1.3	Abbreviations and Acronyms	v
1.4	Mathematical Notation	v
2	Introduction	1
2.1	Purpose of Document	1
2.2	Scope of Requirements	2
2.3	Characteristics of Intended Reader	3
2.4	Organization of Document	3
3	General System Description	3
3.1	System Context	4
3.2	User Characteristics	5
3.3	System Constraints	5
4	Specific System Description	6
4.1	Problem Description	6
4.1.1	Terminology and Definitions	6
4.1.2	Physical System Description	6
4.1.3	Goal Statements	7
4.2	Solution Characteristics Specification	8
4.2.1	Types	9
4.2.2	Scope Decisions	9
4.2.3	Modelling Decisions	9
4.2.4	Assumptions	9
4.2.5	Theoretical Models	10
4.2.6	General Definitions	11
4.2.7	Data Definitions	12
4.2.8	Data Types	13
4.2.9	Instance Models	14
4.2.10	Input Data Constraints	15
4.2.11	Properties of a Correct Solution	16
5	Requirements	16
5.1	Functional Requirements	17
5.2	Nonfunctional Requirements	17
5.3	Rationale	18
6	Likely Changes	18

7	Unlikely Changes	18
8	Traceability Matrices and Graphs	18
9	Development Plan	22
10	Values of Auxiliary Constants	22

Revision History

Date	Version	Notes
2022-02-05	1.0	Initial Release

1 Reference Material

This section records information for easy reference.

1.1 Table of Units

Throughout this document SI (Système International d’Unités) is employed as the unit system. In addition to the basic units, several derived units are used as described below. For each unit, the symbol is given followed by a description of the unit and the SI name.

symbol	unit	SI
m	length	metre
s	time	second

[Only include the units that your SRS actually uses. —TPLT]

[Derived units, like newtons, pascal, etc, should show their derivation (the units they are derived from) if their constituent units are in the table of units (that is, if the units they are derived from are used in the document). For instance, the derivation of pascals as $\text{Pa} = \text{Nm}^{-2}$ is shown if newtons and m are both in the table. The derivations of newtons would not be shown if kg and s are not both in the table. —TPLT]

[The symbol for units named after people use capital letters, but the name of the unit itself uses lower case. For instance, pascals use the symbol Pa, watts use the symbol W, teslas use the symbol T, newtons use the symbol N, etc. The one exception to this is degree Celsius. Details on writing metric units can be found on the [NIST web-page](#). —TPLT]

1.2 Table of Symbols

The table that follows summarizes the symbols used in this document along with their units. The choice of symbols was made to be consistent with the heat transfer literature and with existing documentation for solar water heating systems. The symbols are listed in alphabetical order.

symbol	unit	description
<i>i</i>	Unitless	Robot pose instance
<i>j</i>	Unitless	Camera Instance
<i>k</i>	Unitless	Target Feature Instance
A	3×4 Matrix	SE(3) Equivalent transformation of a camera with respect to the target feature frame
B	3×4 Matrix	SE(3) Equivalent transformation of the end-effector in the robot-base frame
R	3×3 Matrix	Rotation matrix in SO(3)

t	3×3 Matrix	Translation matrix in SE(3)
\mathbf{X}	3×4 Matrix	SE(3) Equivalent transformation of the target feature in the robot-base frame
\mathbf{Y}	3×4 Matrix	SE(3) Equivalent transformation of the camera in the end-effector frame

[Use your problems actual symbols. The si package is a good idea to use for units. —TPLT]

1.3 Abbreviations and Acronyms

symbol	description
A	Assumption
BRIEF	Binary Robust Independent Elementary Features
DD	Data Definition
IFC	Image Feature Correspondences for Camera Calibration
FAST	Features from Accelerated Segment Test
FOV	Field-of-View
GD	General Definition
GS	Goal Statement
HERW	Hand-Eye Robot-World Formulation
IM	Instance Model
LC	Likely Change
ORB	Oriented FAST and Rotated BRIEF
PS	Physical System Description
R	Requirement
SRS	Software Requirements Specification
SURF	Speeded-Up Robust Features
TM	Theoretical Model
V&V	Verification and Validation

[Add any other abbreviations or acronyms that you add —TPLT]

1.4 Mathematical Notation

- Matrixes are capitalized and are bolded, i.e. \mathbf{X}, \mathbf{Y}
- Column vectors are lowercase and are bolded, i.e. \mathbf{s}, \mathbf{t}

- Scalars are lowercase and are not bolded, i.e. a , b

[This section is optional, but should be included for projects that make use of notation to convey mathematical information. For instance, if typographic conventions (like bold face font) are used to distinguish matrices, this should be stated here. If symbols are used to show mathematical operations, these should be summarized here. In some cases the easiest way to summarize the notation is to point to a text or other source that explains the notation. —TPLT]

[This section was added to the template because some students use very domain specific notation. This notation will not be readily understandable to people outside of your domain. It should be explained. —TPLT]

[Guiding principles for the SRS document:

- Do not repeat the same information at the same abstraction level. If information is repeated, the repetition should be at a different abstraction level. For instance, there will be overlap between the scope section and the assumptions, but the scope section will not go into as much detail as the assumptions section.

—TPLT]

[When the documentation is done, it should be possible to trace back to the source of every piece of information. Some information will come from external sources, like terminology. Other information will be derived, like General Definitions. —TPLT]

[An SRS document should have the following qualities: unambiguous, consistent, complete, validatable, abstract and traceable. —TPLT]

[The overall goal of the SRS is that someone that meets the Characteristics of the Intended Reader (Section 2.3) can learn, understand and verify the captured domain knowledge. They should not have to trust the authors of the SRS on any statements. They should be able to independently verify/derive every statement made. —TPLT]

2 Introduction

Camera sensors are a common choice of sensor for many applications in robotics due in part to their low cost and ease of integration. Prior to their use, each camera must be calibrated such that collected data in collected imagery can be aligned with the 3D world. This process is essential to prepare the system so that imagery data can be correctly captured and processed for downstream operations.

Camera calibration consists of two aspects; intrinsic calibration and extrinsic calibration. Intrinsic calibration focuses on mapping the 2D camera image to the 3D camera frame, Extrinsic calibration converts the 3D camera frame to a global world frame. Extrinsic calibration is of significant interest as operators may need to reposition cameras on a robotic platforms for any number of operational needs.

The following section outlines the Software Requirements Specification (SRS) for a calibration algorithm that calculates the extrinsic parameters for a multi-camera robotic platform. The program may be referred to as Image Feature Correspondences, or IFC.

2.1 Purpose of Document

This document is the primary resource for the user to outline the desired characteristics of the user, the required system interfaces, and desired integrated behaviour of the IFC algorithm. The goals and key assumptions of the desired software are outlined, in addition to the required definitions, theoretical models and instance models required to support its development. Specifically, theoretical models are outlined to provide a framework to promote

development such that a specific design solution is not imposed at an early stage of development. The SRS is abstract - it bounds what problems need to be solved by the system, rather than how it needs to be achieved.

Following a standard waterfall development model, this document will be used as a stepping stone to support the development of several additional documents, each of which demonstrates successive growth in the understanding and maturation of the software product. These documents include:

1. The Design Specification: An outline of the architectural decisions that details how the requirements will be realized in the system. This is inclusive of the choice of operating environment, system interfaces with the user and its environment, and the numerical methods that shall be implemented.
2. The Verification and Validation (V&V) Plan: An outline of the specific processes to be used to assess the implementation of the code as developed from the Design Specification. Verification assessments will be used to assess whether the system has been built to the specified requirements from the SRS. Validation tests may also be outlined to ensure that the software correctly addresses the problem as defined in build confidence that the design has satisfied the outlined requirements per [4.1](#).

2.2 Scope of Requirements

The outlined requirements includes conventional imagery processing algorithms. When supplied with the permissible inputs, the IFC software shall be intended to scan imagery data to and identify match candidates amongst each image for various cameras and robot pose. The entire document is written under the assumption that that the within the imagery scene is free of significant changes in ambient illumination during imagery capture. Camera intrinsics are expected to be prior to compile time.

[Modelling the real world requires simplification. The full complexity of the actual physics, chemistry, biology is too much for existing models, and for existing computational solution techniques. Rather than say what is in the scope, it is usually easier to say what is not. You can think of it as the scope is initially everything, and then it is constrained to create the actual scope. For instance, the problem can be restricted to 2 dimensions, or it can ignore the effect of temperature (or pressure) on the material properties, etc. —TPLT]

[The scope section is related to the assumptions section (Section [4.2.4](#)). However, the scope and the assumptions are not at the same level of abstraction. The scope is at a high level. The focus is on the “big picture” assumptions. The assumptions section lists, and describes, all of the assumptions. —TPLT]

[The scope section is relevant for later determining typical values of inputs. The scope should make it clear what inputs are reasonable to expect. This is a distinction between scope and context (context is a later section). Scope affects the inputs while context affects how the software will be used. —TPLT]

2.3 Characteristics of Intended Reader

Reviewers of this document should have a , and a strong understanding of image processing algorithms. A 4th year undergraduate or Master’s level course in Computer Vision algorithm is strongly recommended. The reviewer should have an understanding of robot mechanics per a 3rd or 4th year undergraduate course. The developer should also have a general background in statistics and functional programming.

[This section summarizes the skills and knowledge of the readers of the SRS. It does NOT have the same purpose as the “User Characteristics” section (Section 3.2). The intended readers are the people that will read, review and maintain the SRS. They are the people that will conceivably design the software that is intended to meet the requirements. The user, on the other hand, is the person that uses the software that is built. They may never read this SRS document. Of course, the same person could be a “user” and an “intended reader.” —TPLT]

[The intended reader characteristics should be written as unambiguously and as specifically as possible. Rather than say, the user should have an understanding of physics, say what kind of physics and at what level. For instance, is high school physics adequate, or should the reader have had a graduate course on advanced quantum mechanics? —TPLT]

2.4 Organization of Document

The remainder of the document uses a top-down structure that outlines, in order, the goals, assumptions, theories, definitions, and instance models. These components are then used to derive the functional and non-functional requirements. Goal statements and assumptions are sequentially distilled into theoretical models, definitions, instance models, and finally to requirements.

The reader can glean value through review of the instance models prior to the theoretical models, as the instance models outline an operational specification of system behaviour, rather than a descriptive specification. This enables flexibility in what theoretical models are applied as they may be selected as inputs to the systems as a functional program.

[This section provides a roadmap of the SRS document. It will help the reader orient themselves. It will provide direction that will help them select which sections they want to read, and in what order. This section will be similar between project. —TPLT]

3 General System Description

This section provides general information about the system. It identifies the interfaces between the system and its environment, describes the user characteristics and lists the system constraints.

[The purpose of this section is to provide general information about the system so the specific requirements in the next section will be easier to understand. The general system description section is designed to be changeable independent of changes to the functional

requirements documented in the specific system description. The general system description provides a context for a family of related models. The general description can stay the same, while specific details are changed between family members. —TPLT]

3.1 System Context

[Your system context will include a figure that shows the abstract view of the software. Often in a scientific context, the program can be viewed abstractly following the design pattern of Inputs → Calculations → Outputs. The system context will therefore often follow this pattern. The user provides inputs, the system does the calculations, and then provides the outputs to the user. The figure should not show all of the inputs, just an abstract view of the main categories of inputs (like material properties, geometry, etc.). Likewise, the outputs should be presented from an abstract point of view. In some cases the diagram will show other external entities, besides the user. For instance, when the software product is a library, the user will be another software program, not an actual end user. If there are system constraints that the software must work with external libraries, these libraries can also be shown on the System Context diagram. They should only be named with a specific library name if this is required by the system constraint. —TPLT]




Figure 1: System Context

[For each of the entities in the system context diagram its responsibilities should be listed. Whenever possible the system should check for data quality, but for some cases the user will need to assume that responsibility. The list of responsibilities should be about the inputs and outputs only, and they should be abstract. Details should not be presented here. However, the information should not be so abstract as to just say “inputs” and “outputs”. A summarizing phrase can be used to characterize the inputs. For instance, saying “material

properties” provides some information, but it stays away from the detail of listing every required properties. —TPLT]

- User Responsibilities:
 - Provide input data to the system
 - Verify that the input data uses the correct units
 - Verify that the input data is contained in the correct data structures
 - Configure the type of feature-handler algorithms to be used with corresponding threshold criteria
- Image Feature Correspondences for Camera Calibration Responsibilities:
 - Detect data type mismatch, such as a string of characters instead of a floating point number
 - Assess whether inputs constitute a fully define physical setup
 - Calculate required inputs

[Identify in what context the software will typically be used. Is it for exploration? education? engineering work? scientific work?. Identify whether it will be used for mission-critical or safety-critical applications. —TPLT] [This additional context information is needed to determine how much effort should be devoted to the rationale section. If the application is safety-critical, the bar is higher. This is currently less structured, but analogous to, the idea to the Automotive Safety Integrity Levels (ASILs) that McSCert uses in their automotive hazard analyses. —TPLT]

3.2 User Characteristics

The end user of the IFC software should have an undergraduate understanding of beginner robot mechanics, statistics, and computer vision algorithms.

[This section summarizes the knowledge/skills expected of the user. Measuring usability, which is often a required non-function requirement, requires knowledge of a typical user. As mentioned above, the user is a different role from the “intended reader,” as given in Section 2.3. As in Section 2.3, the user characteristics should be specific and unambiguous. For instance, “The end user of Image Feature Correspondences for Camera Calibration should have an understanding of undergraduate Level 1 Calculus and Physics.” —TPLT]

3.3 System Constraints

[System constraints differ from other type of requirements because they limit the developers’ options in the system design and they identify how the eventual system must fit into the world. This is the only place in the SRS where design decisions can be specified. That is, the quality requirement for abstraction is relaxed here. However, system constraints should only be included if they are truly required. —TPLT]

4 Specific System Description

This section first presents the problem description, which gives a high-level view of the problem to be solved. This is followed by the solution characteristics specification, which presents the assumptions, theories, definitions and finally the instance models.

4.1 Problem Description

Image Feature Correspondences for Camera Calibration is intended to evaluate how imagery data from robot-based cameras can be manipulated to define and align features between separate images in support of downstream operations for extrinsic camera calibration.

4.1.1 Terminology and Definitions

[This section is expressed in words, not with equations. It provide the meaning of the different words and phrases used in the domain of the problem. The terminology is used to introduce concepts from the world outside of the mathematical model The terminology provides a real world connection to give the mathematical model meaning. —TPLT]

This subsection provides a list of terms that are used in the subsequent sections and their meaning, with the purpose of reducing ambiguity and making it easier to correctly understand the requirements:

-

4.1.2 Physical System Description

The physical system of IFC, as shown in FIGURE X, includes the following elements [The purpose of this section is to clearly and unambiguously state the physical system that is to be modelled. Effective problem solving requires a logical and organized approach. The statements on the physical system to be studied should cover enough information to solve the problem. The physical description involves element identification, where elements are defined as independent and separable items of the physical system. Some example elements include acceleration due to gravity, the mass of an object, and the size and shape of an object. Each element should be identified and labelled, with their interesting properties specified clearly. The physical description can also include interactions of the elements, such as the following: i) the interactions between the elements and their physical environment; ii) the interactions between elements; and, iii) the initial or boundary conditions. —TPLT]

[The elements of the physical system do not have to correspond to an actual physical entity. They can be conceptual. This is particularly important when the documentation is for a numerical method. —TPLT]

The physical system of Image Feature Correspondences for Camera Calibration, as shown in Fig.2, outlines the single-camera configuration.

camera, and target

to-hand transform

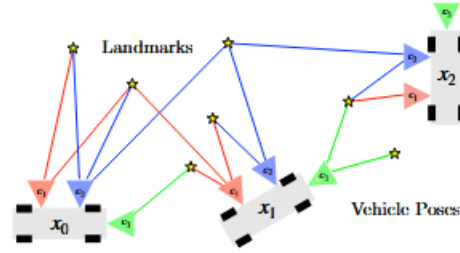


Figure 2: Multi-camera mobile robotic platform. Modified from Kaveti et al. (2024).

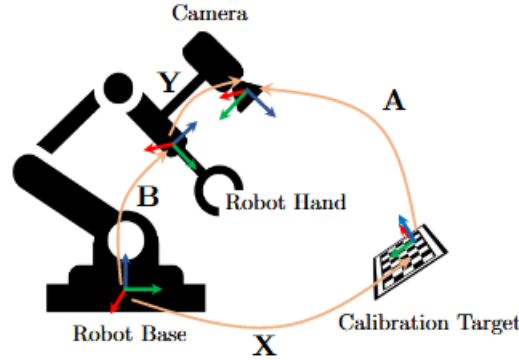


Figure 3: Single-camera robotic manipulator robot-world hand eye configuration. Modified from Wang et al. (2022).

4.1.3 Goal Statements

[The goal statements refine the “Problem Description” (Section 4.1). A goal is a functional objective the system under consideration should achieve. Goals provide criteria for sufficient completeness of a requirements specification and for requirements pertinence. Goals will be refined in Section “Instanced Models” (Section 4.2.9). Large and complex goals should be decomposed into smaller sub-goals. The goals are written abstractly, with a minimal amount of technical language. They should be understandable by non-domain experts. —TPLT]

Given the [inputs —TPLT], the goal statements are:

GS1: Define the criteria used to identify features between separate image frames.

GS2: Define a collection of features from each image frame.

GS3: Compare the identified features from GS02 between each image frame.

GS4: Compute the number of matches in each image frame per the criteria in GS03

GS5: Generate a report of the matched features between each image.

4.2 Solution Characteristics Specification

[This section specifies the information in the solution domain of the system to be developed. This section is intended to express what is required in such a way that analysts and stakeholders get a clear picture, and the latter will accept it. The purpose of this section is to reduce the problem into one expressed in mathematical terms. Mathematical expertise is used to extract the essentials from the underlying physical description of the problem, and to collect and substantiate all physical data pertinent to the problem. —TPLT]


[This section presents the solution characteristics by successively refining models. It starts with the abstract/general Theoretical Models (TMs) and refines them to the concrete/specific Instance Models (IMs). If necessary there are intermediate refinements to General Definitions (GDs). All of these refinements can potentially use Assumptions (A) and Data Definitions (DD). TMs are refined to create new models, that are called GMs or IMs. DDs are not refined; they are just used. GDs and IMs are derived, or refined, from other models. DDs are not derived; they are just given. TMs are also just given, but they are refined, not used. If a potential DD includes a derivation, then that means it is refining other models, which would make it a GD or an IM. —TPLT]

[The above makes a distinction between “refined” and “used.” A model is refined to another model if it is changed by the refinement. When we change a general 3D equation to a 2D equation, we are making a refinement, by applying the assumption that the third dimension does not matter. If we use a definition, like the definition of density, we aren’t refining, or changing that definition, we are just using it. —TPLT]

[The same information can be a TM in one problem and a DD in another. It is about how the information is used. In one problem the definition of acceleration can be a TM, in another it would be a DD. —TPLT]

[There is repetition between the information given in the different chunks (TM, GDs etc) with other information in the document. For instance, the meaning of the symbols, the units etc are repeated. This is so that the chunks can stand on their own when being read by a reviewer/user. It also facilitates reuse of the models in a different context. —TPLT]

[The relationships between the parts of the document are show in the following figure. In this diagram “may ref” has the same role as “uses” above. The figure adds “Likely Changes,” which are able to reference (use) Assumptions. —TPLT]

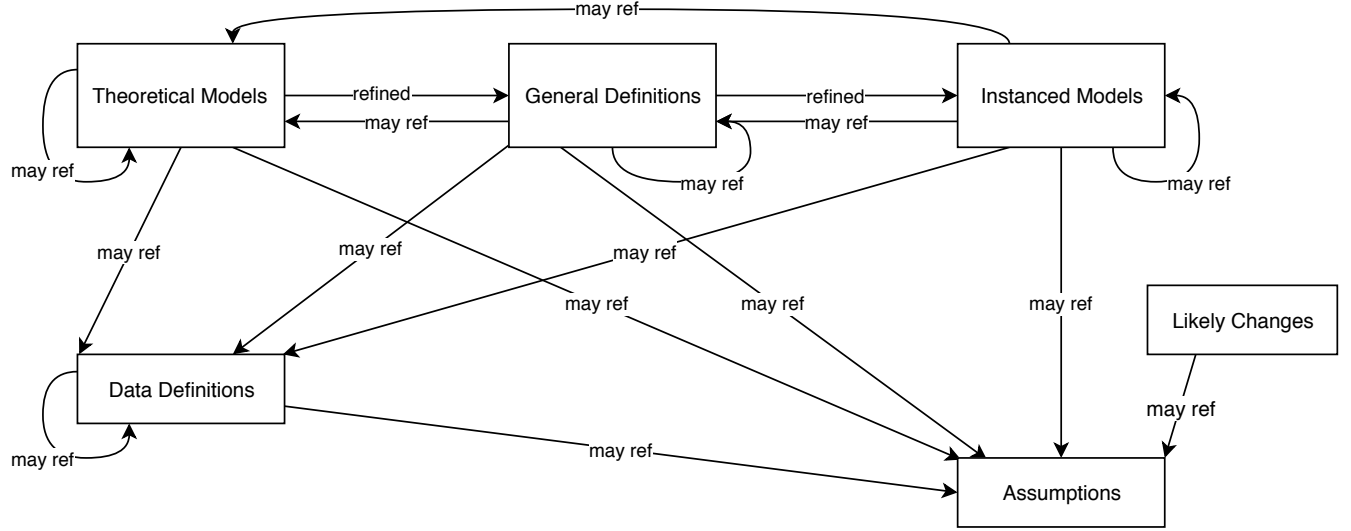

The instance models that govern Image Feature Correspondences for Camera Calibration are presented in Subsection 4.2.9. The information to understand the meaning of the instance models and their derivation is also presented, so that the instance models can be verified.

4.2.1 Types

[This section is optional. Defining types can make the document easier to understand. —TPLT]

4.2.2 Scope Decisions

[This section is optional. —TPLT] Control of the ambient illumination conditions falls outside the scope of this software. It is the responsibility of the user to verify that the ambient lighting conditions do not change to a significant degree during the image capture process.

4.2.3 Modelling Decisions

[This section is optional. —TPLT]

4.2.4 Assumptions

[The assumptions are a refinement of the scope. The scope is general, where the assumptions are specific. All assumptions should be listed, even those that domain experts know so well that they are rarely (if ever) written down. —TPLT] [The document should not take for granted that the reader knows which assumptions have been made. In the case of unusual assumptions, it is recommended that the documentation either include, or point to, an explanation and justification for the assumption. —TPLT] [If it helps with the organization

and understandability, the assumptions can be presented as sub sections. The following subsections are options: background theory assumptions, helper theory assumptions, generic theory assumptions, problem specific assumptions, and rationale assumptions —TPLT]

This section simplifies the original problem and helps in developing the theoretical model by filling in the missing information for the physical system. The numbers given in the square brackets refer to the theoretical model [TM], general definition [GD], data definition [DD], instance model [IM], or likely change [LC], in which the respective assumption is used.

A1: [Short description of each assumption. Each assumption should have a meaningful label. Use cross-references to identify the appropriate traceability to TM, GD, DD etc., using commands like dref, ddref etc. Each assumption should be atomic - that is, there should not be an explicit (or implicit) “and” in the text of an assumption. —TPLT]

A2: Imagery shall be provided by at least one camera.

A3: All supplied imagery is produced by a pinhole model, affine camera. [TM01]

A4: Intrinsic calibration parameters are unique for each camera. [TM01]

A5: The transform between the robot coordinate measurement and the robot base frame is assumed to be known.

4.2.5 Theoretical Models

[Theoretical models are sets of abstract mathematical equations or axioms for solving the problem described in Section “Physical System Description” (Section 4.1.2). Examples of theoretical models are physical laws, constitutive equations, relevant conversion factors, etc. —TPLT]

[Optionally the theory section could be divided into subsections to provide more structure and improve understandability and reusability. Potential subsections include the following: Context theories, background theories, helper theories, generic theories, problem specific theories, final theories and rationale theories. —TPLT]

This section focuses on the general equations and laws that Image Feature Correspondences for Camera Calibration is based on. [Modify the examples below for your problem, and add additional models as appropriate. —TPLT]

RefName: TM:COE

Label: Conservation of thermal energy

Equation: $-\nabla \cdot \mathbf{q} + g = \rho C \frac{\partial T}{\partial t}$

Description: The above equation gives the conservation of energy for transient heat transfer in a material of specific heat capacity C ($\text{J kg}^{-1} \text{°C}^{-1}$) and density ρ (kg m^{-3}), where \mathbf{q} is the thermal flux vector (W m^{-2}), g is the volumetric heat generation (W m^{-3}), T is the temperature (°C), t is time (s), and ∇ is the gradient operator. For this equation to apply, other forms of energy, such as mechanical energy, are assumed to be negligible in the system (A??). In general, the material properties (ρ and C) depend on temperature.

Notes: None.

Source: http://www.efunda.com/formulae/heat_transfer/conduction/overview_cond.cfm

Ref. By: GD??

Preconditions for TM:COE: None

Derivation for TM:COE: Not Applicable

[“Ref. By” is used repeatedly with the different types of information. This stands for Referenced By. It means that the models, definitions and assumptions listed reference the current model, definition or assumption. This information is given for traceability. Ref. By provides a pointer in the opposite direction to what we commonly do. You still need to have a reference in the other direction pointing to the current model, definition or assumption. As an example, if TM1 is referenced by GD2, that means that GD2 will explicitly include a reference to TM1. —TPLT]

4.2.6 General Definitions

[General Definitions (GDs) are a refinement of one or more TMs, and/or of other GDs. The GDs are less abstract than the TMs. Generally the reduction in abstraction is possible through invoking (using/referencing) Assumptions. For instance, the TM could be Newton’s

Law of Cooling stated abstracting. The GD could take the general law and apply it to get a 1D equation. —TPLT]

This section collects the laws and equations that will be used in building the instance models.

[Some projects may not have any content for this section, but the section heading should be kept. —TPLT] [Modify the examples below for your problem, and add additional definitions as appropriate. —TPLT]

Number	GD1
Label	Newton's law of cooling
SI Units	W m^{-2}
Equation	$q(t) = h\Delta T(t)$
Description	<p>Newton's law of cooling describes convective cooling from a surface. The law is stated as: the rate of heat loss from a body is proportional to the difference in temperatures between the body and its surroundings.</p> <p>$q(t)$ is the thermal flux (W m^{-2}).</p> <p>h is the heat transfer coefficient, assumed independent of T (A??) ($\text{W m}^{-2} \text{ }^{\circ}\text{C}^{-1}$).</p> <p>$\Delta T(t) = T(t) - T_{\text{env}}(t)$ is the time-dependent thermal gradient between the environment and the object ($^{\circ}\text{C}$).</p>
Source	Citation here
Ref. By	DD1, DD??

Detailed derivation of simplified rate of change of temperature

[This may be necessary when the necessary information does not fit in the description field. —TPLT] [Derivations are important for justifying a given GD. You want it to be clear where the equation came from. —TPLT]

4.2.7 Data Definitions

[The Data Definitions are definitions of symbols and equations that are given for the problem. They are not derived; they are simply used by other models. For instance, if a problem depends on density, there may be a data definition for the equation defining density. The DDs are given information that you can use in your other modules. —TPLT]

[All Data Definitions should be used (referenced) by at least one other model. —TPLT]

This section collects and defines all the data needed to build the instance models. The dimension of each quantity is also given. [Modify the examples below for your problem, and add additional definitions as appropriate. —TPLT]

Number	DD1
Label	Heat flux out of coil
Symbol	q_C
SI Units	W m^{-2}
Equation	$q_C(t) = h_C(T_C - T_W(t))$, over area A_C
Description	T_C is the temperature of the coil ($^{\circ}\text{C}$). T_W is the temperature of the water ($^{\circ}\text{C}$). The heat flux out of the coil, q_C (W m^{-2}), is found by assuming that Newton’s Law of Cooling applies (A??). This law (GD1) is used on the surface of the coil, which has area A_C (m^2) and heat transfer coefficient h_C ($\text{W m}^{-2} ^{\circ}\text{C}^{-1}$). This equation assumes that the temperature of the coil is constant over time (A??) and that it does not vary along the length of the coil (A??).
Sources	Citation here
Ref. By	IM1

4.2.8 Data Types

[This section is optional. In many scientific computing programs it isn’t necessary, since the inputs and output are straightforward types, like reals, integers, and sequences of reals and integers. However, for some problems it is very helpful to capture the type information. —TPLT]

[The data types are not derived; they are simply stated and used by other models. —TPLT]

[All data types must be used by at least one of the models. —TPLT]

[For the mathematical notation for expressing types, the recommendation is to use the notation of Hoffman and Strooper (1995). —TPLT]

This section collects and defines all the data types needed to document the models. [Modify the examples below for your problem, and add additional definitions as appropriate. —TPLT]

Type Name	Name for Type
Type Def	mathematical definition of the type
Description	description here
Sources	Citation here, if the type is borrowed from another source

4.2.9 Instance Models

[The motivation for this section is to reduce the problem defined in “Physical System Description” (Section 4.1.2) to one expressed in mathematical terms. The IMs are built by refining the TMs and/or GDs. This section should remain abstract. The SRS should specify the requirements without considering the implementation. —TPLT]

This section transforms the problem defined in Section 4.1 into one which is expressed in mathematical terms. It uses concrete symbols defined in Section 4.2.7 to replace the abstract symbols in the models identified in Sections 4.2.5 and 4.2.6.

The goals [reference your goals —TPLT] are solved by [reference your instance models —TPLT]. [other details, with cross-references where appropriate. —TPLT] [Modify the examples below for your problem, and add additional models as appropriate. —TPLT]

Number	IM1
Label	Energy balance on water to find T_W
Input	$m_W, C_W, h_C, A_C, h_P, A_P, t_{\text{final}}, T_C, T_{\text{init}}, T_P(t)$ from IM?? The input is constrained so that $T_{\text{init}} \leq T_C$ (A??)
Output	$T_W(t), 0 \leq t \leq t_{\text{final}}$, such that $\frac{dT_W}{dt} = \frac{1}{\tau_W}[(T_C - T_W(t)) + \eta(T_P(t) - T_W(t))]$, $T_W(0) = T_P(0) = T_{\text{init}}$ (A??) and $T_P(t)$ from IM??
Description	T_W is the water temperature ($^{\circ}\text{C}$). T_P is the PCM temperature ($^{\circ}\text{C}$). T_C is the coil temperature ($^{\circ}\text{C}$). $\tau_W = \frac{m_W C_W}{h_C A_C}$ is a constant (s). $\eta = \frac{h_P A_P}{h_C A_C}$ is a constant (dimensionless). The above equation applies as long as the water is in liquid form, $0 < T_W < 100^{\circ}\text{C}$, where 0°C and 100°C are the melting and boiling points of water, respectively (A??, A??).
Sources	Citation here
Ref. By	IM??

Derivation of ...

[The derivation shows how the IM is derived from the TMs/GDs. In cases where the derivation cannot be described under the Description field, it will be necessary to include this subsection. —TPLT]

4.2.10 Input Data Constraints

Table 2 shows the data constraints on the input output variables. The column for physical constraints gives the physical limitations on the range of values that can be taken by the variable. The column for software constraints restricts the range of inputs to reasonable values. The software constraints will be helpful in the design stage for picking suitable algorithms. The constraints are conservative, to give the user of the model the flexibility to experiment with unusual situations. The column of typical values is intended to provide a feel for a common scenario. The uncertainty column provides an estimate of the confidence with which the physical quantities can be measured. This information would be part of the input if one were performing an uncertainty quantification exercise.

The specification parameters in Table 2 are listed in Table 4.

Table 2: Input Variables

Var	Physical Constraints	Software Constraints	Typical Value	Uncertainty
L	$L > 0$	$L_{\min} \leq L \leq L_{\max}$	1.5 m	10%

(*) [you might need to add some notes or clarifications —TPLT]

Table 4: Specification Parameter Values

Var	Value
L_{\min}	0.1 m

4.2.11 Properties of a Correct Solution

A correct solution must exhibit [fill in the details —TPLT]. [These properties are in addition to the stated requirements. There is no need to repeat the requirements here. These additional properties may not exist for every problem. Examples include conservation laws (like conservation of energy or mass) and known constraints on outputs, which are usually summarized in tabular form. A sample table is shown in Table 6 —TPLT]

Table 6: Output Variables

Var	Physical Constraints
T_W	$T_{\text{init}} \leq T_W \leq T_C$ (by A??)

[This section is not for test cases or techniques for verification and validation. Those topics will be addressed in the Verification and Validation plan. —TPLT]

5 Requirements

[The requirements refine the goal statement. They will make heavy use of references to the instance models. —TPLT]

This section provides the functional requirements, the business tasks that the software is expected to complete, and the nonfunctional requirements, the qualities that the software is expected to exhibit.

5.1 Functional Requirements

- R1: [Requirements for the inputs that are supplied by the user. This information has to be explicit. —TPLT]
- R2: [It isn't always required, but often echoing the inputs as part of the output is a good idea. —TPLT]
- R3: [Calculation related requirements. —TPLT]
- R4: [Verification related requirements. —TPLT]
- R5: [Output related requirements. —TPLT]

[Every IM should map to at least one requirement, but not every requirement has to map to a corresponding IM. —TPLT]

5.2 Nonfunctional Requirements

[List your nonfunctional requirements. You may consider using a fit criterion to make them verifiable. —TPLT] [The goal is for the nonfunctional requirements to be unambiguous, abstract and verifiable. This isn't easy to show succinctly, so a good strategy may be to give a "high level" view of the requirement, but allow for the details to be covered in the Verification and Validation document. —TPLT] [An absolute requirement on a quality of the system is rarely needed. For instance, an accuracy of 0.0101 % is likely fine, even if the requirement is for 0.01 % accuracy. Therefore, the emphasis will often be more on describing how well the quality is achieved, through experimentation, and possibly theory, rather than meeting some bar that was defined a priori. —TPLT] [You do not need an entry for correctness in your NFRs. The purpose of the SRS is to record the requirements that need to be satisfied for correctness. Any statement of correctness would just be redundant. Rather than discuss correctness, you can characterize how far away from the correct (true) solution you are allowed to be. This is discussed under accuracy. —TPLT]

- NFR1: **Accuracy** [Characterize the accuracy by giving the context/use for the software. Maybe something like, "The accuracy of the computed solutions should meet the level needed for <engineering or scientific application>. The level of accuracy achieved by Image Feature Correspondences for Camera Calibration shall be described following the procedure given in Section X of the Verification and Validation Plan." A link to the VnV plan would be a nice extra. —TPLT]

- NFR2: **Usability** [Characterize the usability by giving the context/use for the software. You should likely reference the user characteristics section. The level of usability achieved by the software shall be described following the procedure given in Section X of the Verification and Validation Plan. A link to the VnV plan would be a nice extra. —TPLT]
- NFR3: **Maintainability** [The effort required to make any of the likely changes listed for Image Feature Correspondences for Camera Calibration should be less than FRACTION of the original development time. FRACTION is then a symbolic constant that can be defined at the end of the report. —TPLT]
- NFR4: **Portability** [This NFR is easier to write than the others. The systems that Image Feature Correspondences for Camera Calibration should run on should be listed here. When possible the specific versions of the potential operating environments should be given. To make the NFR verifiable a statement could be made that the tests from a given section of the VnV plan can be successfully run on all of the possible operating environments. —TPLT]
- Other NFRs that might be discussed include verifiability, understandability and reusability.

5.3 Rationale

[Provide a rationale for the decisions made in the documentation. Rationale should be provided for scope decisions, modelling decisions, assumptions and typical values. —TPLT]

6 Likely Changes

- LC1: [Give the likely changes, with a reference to the related assumption (aref), as appropriate. —TPLT]

7 Unlikely Changes

- LC2: [Give the unlikely changes. The design can assume that the changes listed will not occur. —TPLT]

8 Traceability Matrices and Graphs

The purpose of the traceability matrices is to provide easy references on what has to be additionally modified if a certain component is changed. Every time a component is changed, the items in the column of that component that are marked with an “X” may have to be

modified as well. Table 8 shows the dependencies of theoretical models, general definitions, data definitions, and instance models with each other. Table 9 shows the dependencies of instance models, requirements, and data constraints on each other. Table 10 shows the dependencies of theoretical models, general definitions, data definitions, instance models, and likely changes on the assumptions.

[You will have to modify these tables for your problem. —TPLT]

[The traceability matrix is not generally symmetric. If GD1 uses A1, that means that GD1’s derivation or presentation requires invocation of A1. A1 does not use GD1. A1 is “used by” GD1. —TPLT]

[The traceability matrix is challenging to maintain manually. Please do your best. In the future tools (like Drasil) will make this much easier. —TPLT]

	TM??	TM??	TM??	GD1	GD??	DD1	DD??	DD??	DD??	IM1	IM??	IM??
TM??												
TM??			X									
TM??												
GD1												
GD??	X											
DD1				X								
DD??				X								
DD??												
DD??								X				
IM1					X	X	X				X	
IM??					X		X		X	X		
IM??		X										
IM??		X	X				X	X	X		X	

Table 8: Traceability Matrix Showing the Connections Between Items of Different Sections

The purpose of the traceability graphs is also to provide easy references on what has to be additionally modified if a certain component is changed. The arrows in the graphs represent dependencies. The component at the tail of an arrow is depended on by the component at the head of that arrow. Therefore, if a component is changed, the components that it points to should also be changed. Figure ?? shows the dependencies of theoretical models, general definitions, data definitions, instance models, likely changes, and assumptions on each other. Figure ?? shows the dependencies of instance models, requirements, and data constraints on each other.

	IM1	IM??	IM??	IM??	4.2.10	R??	R??
IM1		X				X	X
IM??	X			X		X	X
IM??						X	X
IM??		X				X	X
R??							
R??						X	
R??					X		
R2	X	X				X	X
R??	X						
R??		X					
R??			X				
R??				X			
R4			X	X			
R??		X					
R??		X					

Table 9: Traceability Matrix Showing the Connections Between Requirements and Instance Models

	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??	A??
TM??	X																		
TM??																			
TM??																			
GD1		X																	
GD??			X	X	X	X													
DD1							X	X	X										
DD??			X	X						X									
DD??																			
DD??																			
IM1											X	X		X	X	X			X
IM??												X	X			X	X	X	
IM??														X					X
IM??													X					X	
LC??				X															
LC??								X											
LC??									X										
LC??											X								
LC??												X							
LC??															X				

Table 10: Traceability Matrix Showing the Connections Between Assumptions and Other Items

9 Development Plan

[This section is optional. It is used to explain the plan for developing the software. In particular, this section gives a list of the order in which the requirements will be implemented. In the context of a course this is where you can indicate which requirements will be implemented as part of the course, and which will be “faked” as future work. This section can be organized as a prioritized list of requirements, or it could should the requirements that will be implemented for “phase 1”, “phase 2”, etc. —TPLT]

10 Values of Auxiliary Constants

[Show the values of the symbolic parameters introduced in the report. —TPLT]

[The definition of the requirements will likely call for SYMBOLIC_CONSTANTS. Their values are defined in this section for easy maintenance. —TPLT]

[The value of FRACTION, for the Maintainability NFR would be given here. —TPLT]

References

- Daniel M. Hoffman and Paul A. Strooper. *Software Design, Automated Testing, and Maintenance: A Practical Approach*. International Thomson Computer Press, New York, NY, USA, 1995. URL <http://citeseer.ist.psu.edu/428727.html>.
- Pushyami Kaveti, Matthew Giamou, Hanumant Singh, and David M. Rosen. Oasis: Optimal arrangements for sensing in slam. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 13818–13824, 2024. doi: 10.1109/ICRA57147.2024.10611644.
- Yifu Wang, Wenqing Jiang, Kun Huang, Sören Schwertfeger, and Laurent Kneip. Accurate calibration of multi-perspective cameras from a generalization of the hand-eye constraint. In *2022 International Conference on Robotics and Automation (ICRA)*, pages 1244–1250, 2022. doi: 10.1109/ICRA46639.2022.9811577.

[The following is not part of the template, just some things to consider when filing in the template. —TPLT]

[Grammar, flow and L^AT_EX advice:

- For Mac users *.DS_Store should be in .gitignore
- L^AT_EX and formatting rules
 - Variables are italic, everything else not, includes subscripts ([link to document](#))
 - * [Conventions](#)
 - * Watch out for implied multiplication
 - Use BibTeX
 - Use cross-referencing
- Grammar and writing rules
 - Acronyms expanded on first usage (not just in table of acronyms)
 - “In order to” should be “to”

—TPLT]

[Advice on using the template:

- Difference between physical and software constraints
- Properties of a correct solution means *additional* properties, not a restating of the requirements (may be “not applicable” for your problem). If you have a table of output constraints, then these are properties of a correct solution.
- Assumptions have to be invoked somewhere
- “Referenced by” implies that there is an explicit reference
- Think of traceability matrix, list of assumption invocations and list of reference by fields as automatically generatable
- If you say the format of the output (plot, table etc), then your requirement could be more abstract

—TPLT]

End of Document.