


DO NOT
SCALE FROM
THIS PRINT

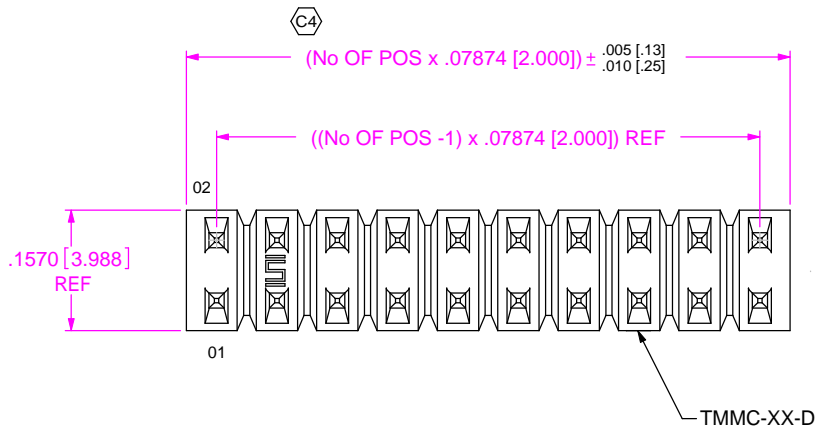

PTT-1XX-XX-X-D-XXX

No OF POSITIONS
-02 THRU -50
(PER ROW)

LEAD STYLE
SEE TABLE 1

PLATING SPECIFICATION
-S: SELECTIVE GOLD
(USE T-1S47-XX-S)
-SM: SELECTIVE GOLD; MATTE TIN TAIL
(USE T-1S47-XX-S)

POLARIZATION OPTION
-XXX INDICATES POSITION
TO BE OMITTED

ROW SPECIFICATION
-D: DOUBLE ROW
(USE TMMC-XX-D)


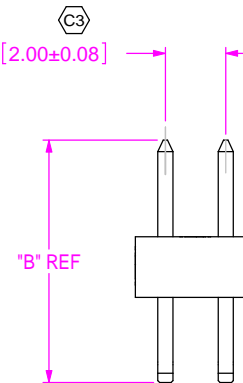
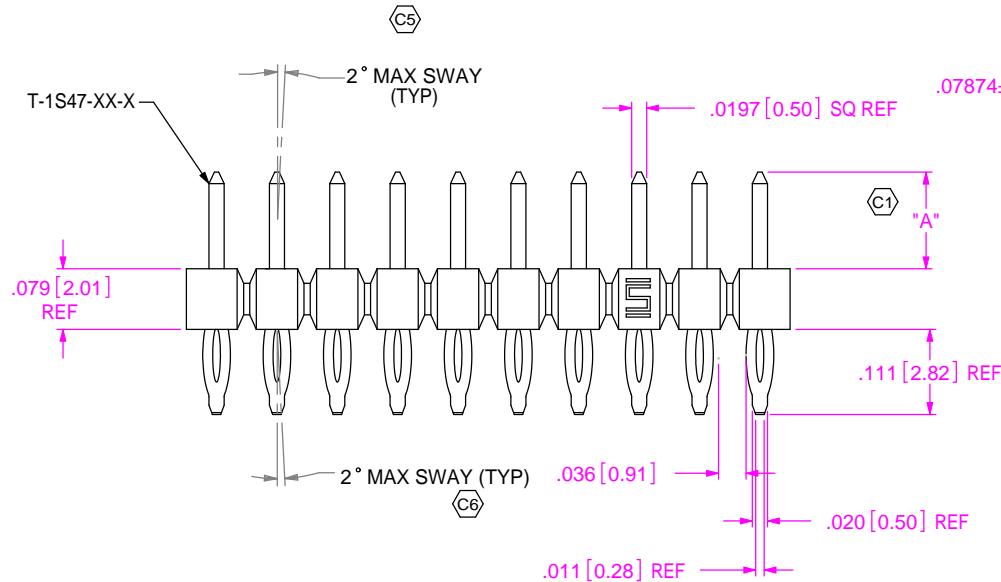


TABLE 1			
STYLE	TERMINAL	"A"	"B"
-01	T-1S47-01-X	.126[3.20]	.316[8.03]
☒ *04	T-1S47-04-X	.075[1.91]	.265[6.73]
☒ *05	T-1S47-05-X	.065[1.65]	.256[6.50]

* = NOT TOOLED
☒ = NOT RELEASED FOR SALE

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. MAXIMUM CUT FLASH: .015 [.38].
3. MINIMUM PUSHOUT FORCE: 1.0 LB PER PIN.
4. PART MAY BE CUT TO POSITION USING CARBIDE BLADES.
5. ALL POSITIONS TO BE LAYER PACKAGED
6. MAX ALLOWABLE BOW .0015" IN/IN

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS	ANGLES
.XXX: ± .005 [.13]	2°
.XXXX: ± .0020 [.051]	
.XXXXX: ± .0020 [.051]	

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE 4:1

INSULATOR: VECTRA LCP
COLOR: BLACK
TERMINAL: PHOS BRONZE

DESCRIPTION:
2MM PRESS FIT TERMINAL STRIP

DWG. NO.
PTT-1XX-XX-X-D-XXX

BY: KEVIN B 4/4/2000 SHEET 1 OF 1

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.