

MB86298 'Ruby' EMI Optimization using SSCG

© Fujitsu Microelectronics Europe GmbH

History

Date	Author	Version	Comment
22.06.2009	AvT	1.0	Draft version

Warranty and Disclaimer

To the maximum extent permitted by applicable law, Fujitsu Microelectronics GmbH restricts its warranties and its liability for **all products delivered free of charge** (e.g. software include or header files, application examples, **Application Notes**, target boards, evaluation boards, engineering samples of IC's etc.), its performance and any consequential damages, on the use of the Product in accordance with (i) the terms of the License Agreement and the Sale and Purchase Agreement under which agreements the Product has been delivered, (ii) the technical descriptions and (iii) all accompanying written materials. In addition, to the maximum extent permitted by applicable law, Fujitsu Microelectronics GmbH disclaims all warranties and liabilities for the performance of the Product and any consequential damages in cases of unauthorised decompiling and/or reverse engineering and/or disassembling. **Note, all these products are intended and must only be used in an evaluation laboratory environment.**

1. Fujitsu Microelectronics GmbH warrants that the Product will perform substantially in accordance with the accompanying written materials for a period of 90 days from the date of receipt by the customer. Concerning the hardware components of the Product, Fujitsu Microelectronics GmbH warrants that the Product will be free from defects in material and workmanship under use and service as specified in the accompanying written materials for a duration of 1 year from the date of receipt by the customer.
2. Should a Product turn out to be defect, Fujitsu Microelectronics GmbH's entire liability and the customer's exclusive remedy shall be, at Fujitsu Microelectronics GmbH's sole discretion, either return of the purchase price and the license fee, or replacement of the Product or parts thereof, if the Product is returned to Fujitsu Microelectronics GmbH in original packing and without further defects resulting from the customer's use or the transport. However, this warranty is excluded if the defect has resulted from an accident not attributable to Fujitsu Microelectronics GmbH, or abuse or misapplication attributable to the customer or any other third party not relating to Fujitsu Microelectronics GmbH.
3. To the maximum extent permitted by applicable law Fujitsu Microelectronics GmbH disclaims all other warranties, whether expressed or implied, in particular, but not limited to, warranties of merchantability and fitness for a particular purpose for which the Product is not designated.
4. To the maximum extent permitted by applicable law, Fujitsu Microelectronics GmbH's and its suppliers' liability is restricted to intention and gross negligence.

NO LIABILITY FOR CONSEQUENTIAL DAMAGES

To the maximum extent permitted by applicable law, in no event shall Fujitsu Microelectronics GmbH and its suppliers be liable for any damages whatsoever (including but without limitation, consequential and/or indirect damages for personal injury, assets of substantial value, loss of profits, interruption of business operation, loss of information, or any other monetary or pecuniary loss) arising from the use of the Product.

Should one of the above stipulations be or become invalid and/or unenforceable, the remaining stipulations shall stay in full effect.

Table of Contents

1	Spread-Spectrum Clocking Introduction	4
2	The SSCG unit in MB86298 'Ruby'	5
2.1	Operating Frequency Ranges.....	5
2.2	Modulation Parameters.....	5
2.2.1	Modulation Period	5
2.2.2	Modulation Period Delta (Jitter)	6
2.2.3	Modulation Type	6
2.2.4	Modulation Peak	8
2.2.5	Modulation Shape	9
2.3	Frequency Offset (DC Offset)	10
3	Selecting the SSCG Operating Frequency	10
4	How to configure the SSCG Unit	11
4.1	SSCG Unit Default Values.....	11
4.2	Configuring the SSCG Registers	11
5	Enabling the SSCG Unit	12
6	Checking the SSCG Unit is Operating	12
7	Important Notes during operation	12
8	Disabling the SSCG Unit.....	13


1 Spread-Spectrum Clocking Introduction

Spread-spectrum clocking has become more popular in portable electronics devices because of faster clock speeds and the increasing integration of high-resolution LCD displays in smaller and smaller devices. As these devices are designed to be lightweight and inexpensive, passive EMI reduction measures such as capacitors or metal shielding are not a viable option. This document briefly describes the functionality and use of the Spread-Spectrum Clock Generation (SSCG) unit of the MB86298 'Ruby' display controller device.

A configurable spread-spectrum clock generator unit is integrated in MB86298 'Ruby' in order to be able to provide a modulated clock signal (as an alternative, parallel to the output of the internal PLL unit), for use by the GDC's internal units. Actually, this means that a modulated clock signal can be generated separately for:

- the internal circuitry
- the output display controllers (also separately for each)

The purpose of the SSCG is to spread the electromagnetic energy generated in a particular bandwidth over a frequency domain, resulting in a wider bandwidth, reducing the spectral density of the EMI produced by the device. The radiated energy itself is not reduced, but simply distributed in a frequency domain.

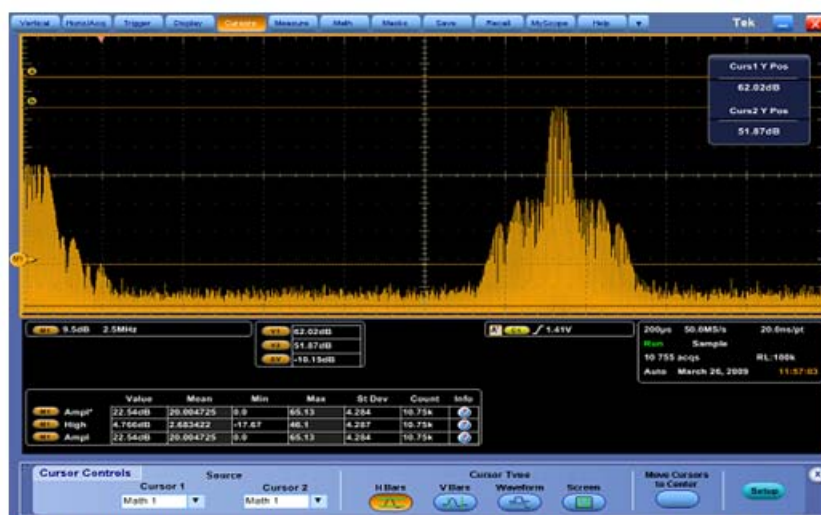

SSCG rate 35kHz, center spreading of 0.5 %, attenuation about 10.2 dB

Figure 1 Screenshot of EMI analysis using SSCG

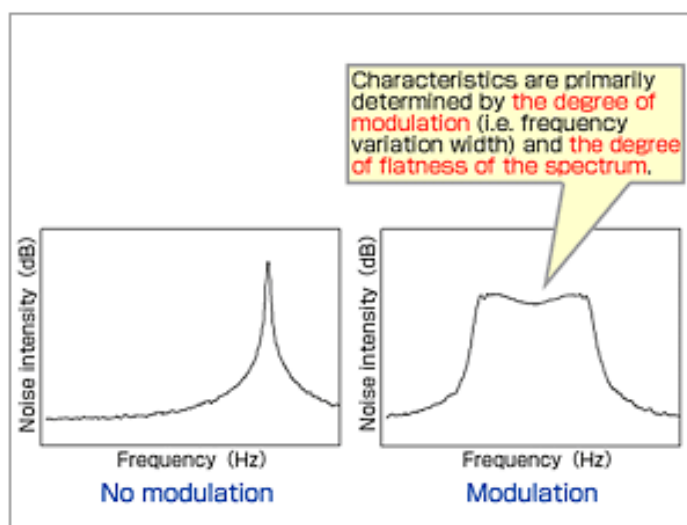


Figure 2 EMI improvement using SSCG

2 The SSCG unit in MB86298 'Ruby'

The SSCG unit plays an essential role in the MB86298 'Ruby' GDC providing the 'heartbeat' of the digital units in the device. Whereas the internal PLL provides a non-modulated clock to the internal units via the Clock/Reset Distribution unit, the SSCG can be configured and then activated to provide a modulated clock signal.

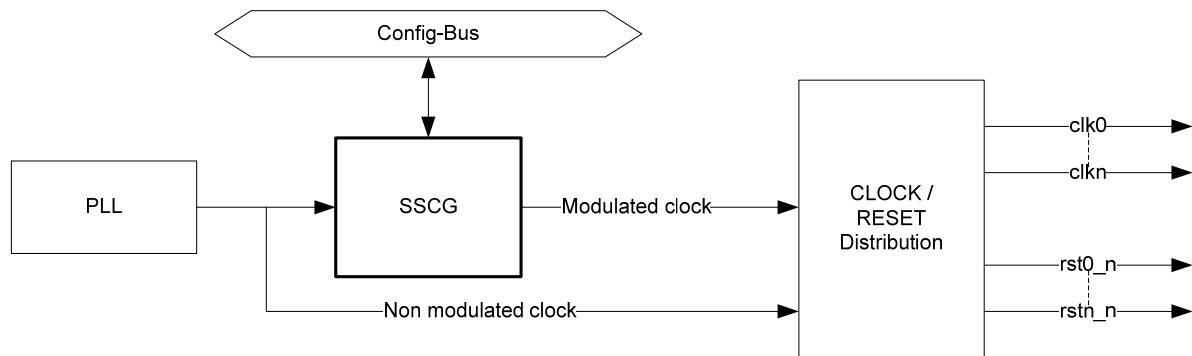


Figure 3 SSCG Location

2.1 Operating Frequency Ranges

Much the same as in an automobile, the SSCG unit can be operated in one of two 'gears', i.e. one of the following input frequency ranges (delivered by the internal PLL):

- Ruby: 1.0 GHz – 1.3 GHz
- Ruby: 1.3 GHz – 1.6 GHz (Default)

2.2 Modulation Parameters

2.2.1 Modulation Period

The SSCG unit can produce a modulated clock signal whose period (or wavelength) is variable in the range of:

- 1/1,048,320 to 1/256

of the (input) PLL clock.

Example

With a PLL input clock of 1.6 GHz, this means the period of the modulated signal can be theoretically in a range between 1,5 KHz ($1.6 \text{ GHz} * [1/1,048,320]$) and 5,25 MHz ($1.6 \text{ GHz} * [1/256]$)

Recommend period range 15 kHz-35 kHz
($0xB4 \leq \text{SSCG_PERIOD} \leq 0x1A4$)

2.2.2 Modulation Period Delta (Jitter)

The 'Modulation Period Delta' is the amount by which the period of the modulated output signal is intentionally 'jittered', i.e. alternately shifted up and down in the frequency spectrum.

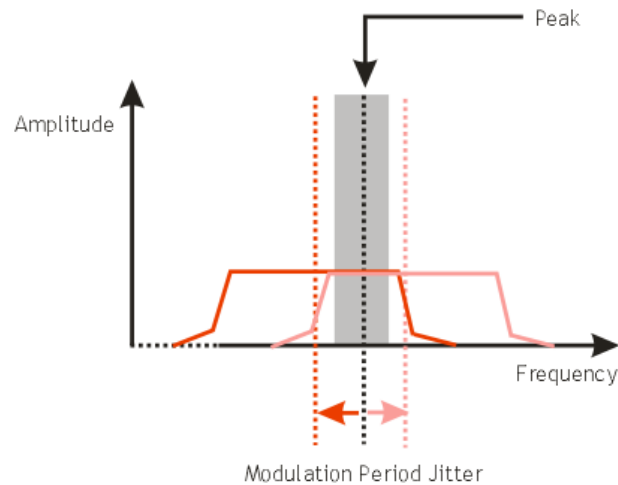


Figure 4 Modulation Period Jitter

2.2.3 Modulation Type

The term 'Modulation Type' refers to the direction in which the frequency spectrum of the modulated output signal is spread. The following modulation types can be selected:

- Non-modulated
i.e. the SSCG is bypassed and the PLL signal is used.
- Downspread
The frequency spread offset is shifted downwards (to the left) of the frequency spectrum.
This modulation applies to all internal bus clocks and the memory clock domains. It could be used for the Display Clock signals, but then you must pay very careful attention to the resulting video timing (whether this causes display driving problems).
- Upspread (**not useable with MB86298 'Ruby'!**)
The frequency spread offset is shifted upwards (to the right) of the frequency spectrum
- Center spread (default). The frequency spread offset is centered on the PLL frequency (x-axis of the frequency spectrum), DC offset = 0.
This modulation type applies to the Display Clock signal only (not useable for the internal bus clocks and the memory clock domains).

Note:

The upspread option is not used with MB86298 'Ruby'.

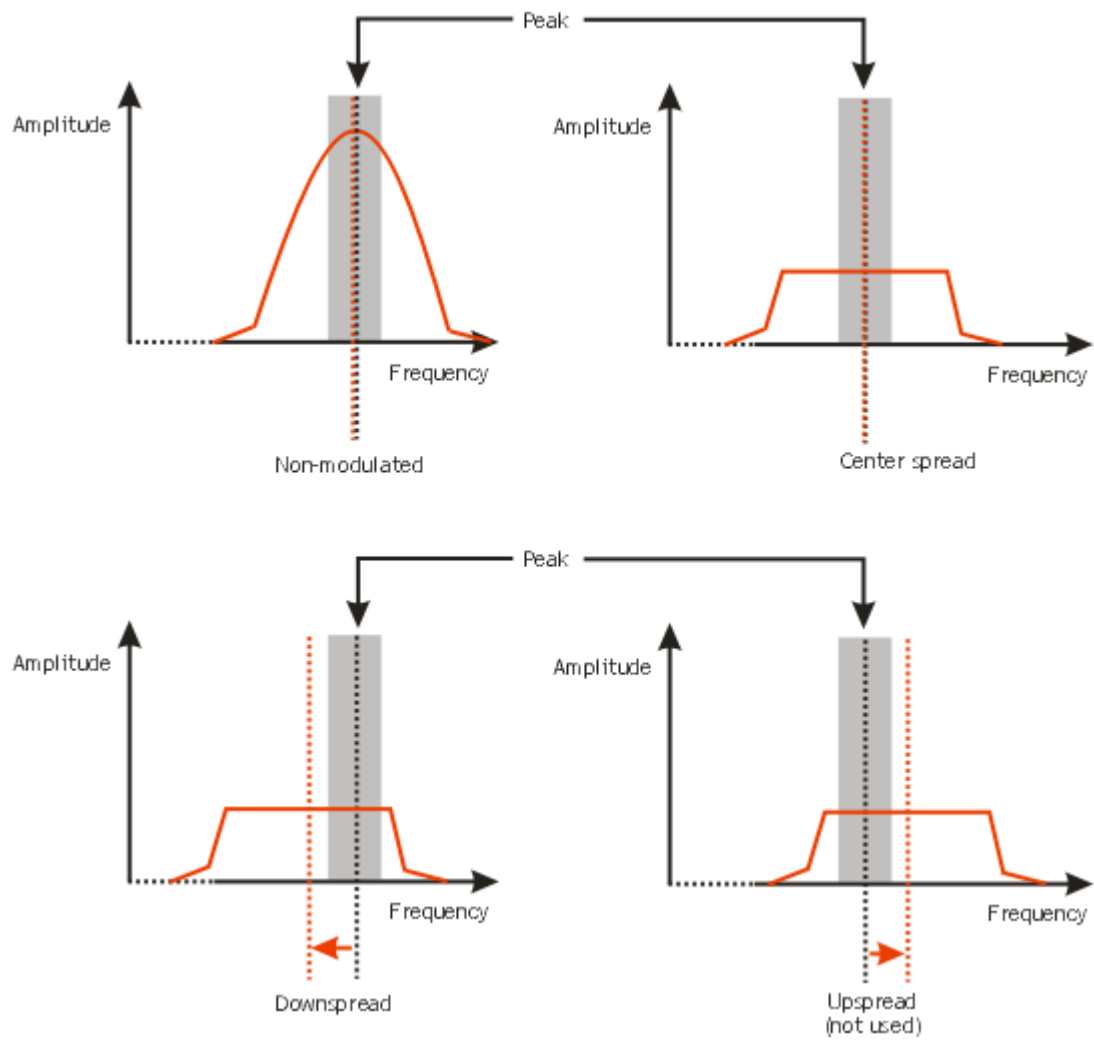


Figure 5 Modulation Types

2.2.4 Modulation Peak

The Modulation Peak (set using the SSCG_PEAK_FREQUENCY register) has two settings:

- SSCG_PEAK_FREQUENCY = 0
Varies the Modulation Peak from 0 to $\pm 3\%$ (recommended value due to the latency of internal calculations)
- SSCG_PEAK_FREQUENCY = 1
Varies the Modulation Peak from 0 to $\pm 6\%$

For signal stability reasons, the 'Modulation Peak', i.e. maximum or minimum modulation frequency value of the modulated output signal is restricted to a specific value range. The values are as follows:

- Default: $\pm 1.0\%$
- Downspread: 0 to -1.56%
- Center spread: -1.56% to $+1.56\%$


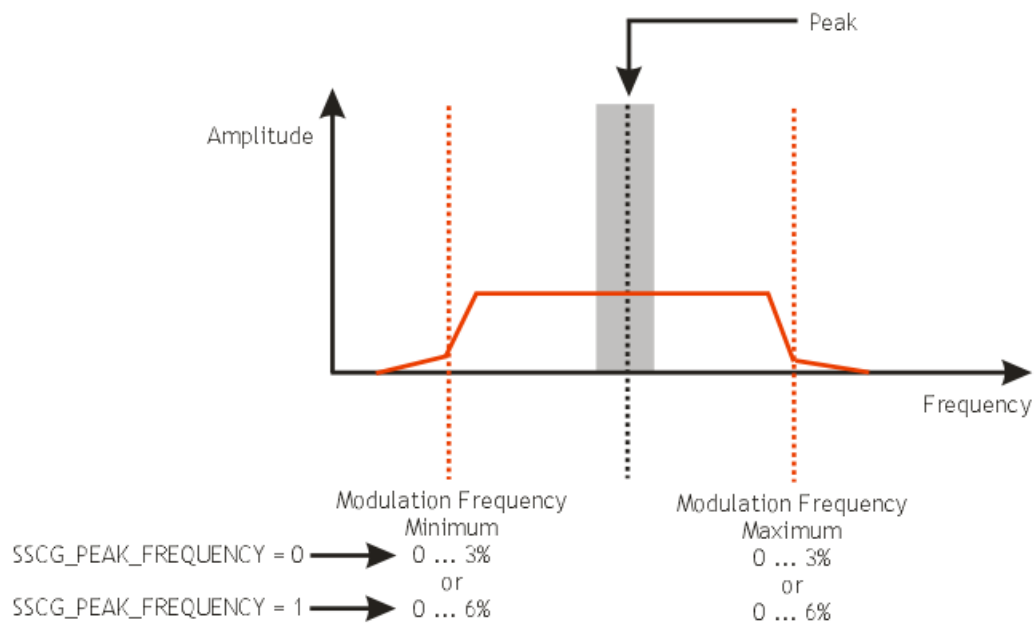


Figure 6 SSCG Modulation Peak

2.2.5 Modulation Shape


The 'Modulation Shape' is the form of signal which is used to modulate the main output clock signal. There are two shapes:

- **Triangle**
A single triangular shape with a constant period is used for modulation.

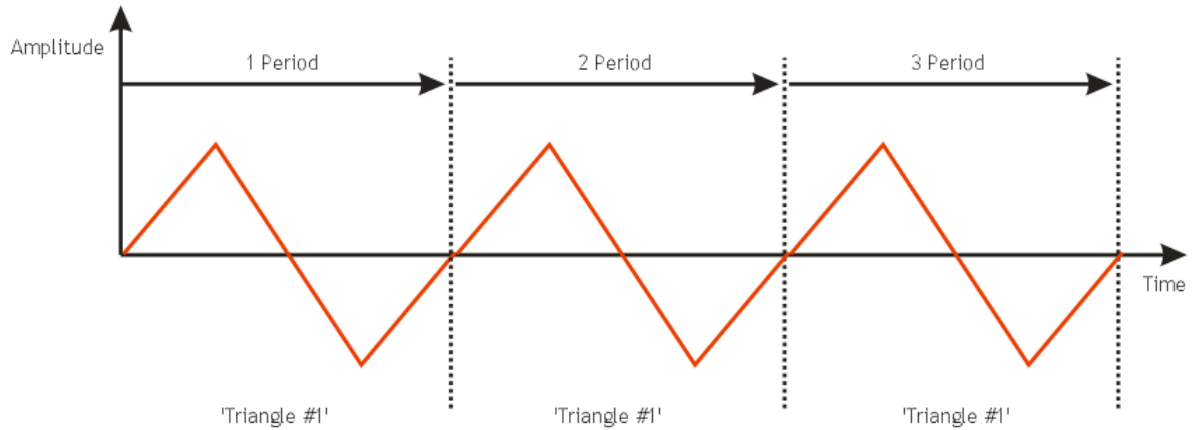

Triangle Modulation Shape

- **'Dual Triangle'**
This shape is used when the duty cycle of the working period of the modulated output signal is intentionally 'jittered' or modified (using the SSCG_PERIOD_JITTER register) to level out small peaks in the frequency spectrum of the modulated clock signal. The amplitude of the 'second triangle shape' is also slightly higher than that of the first. The final modulation shape is essentially the result of continuously alternating between two different triangle shapes.

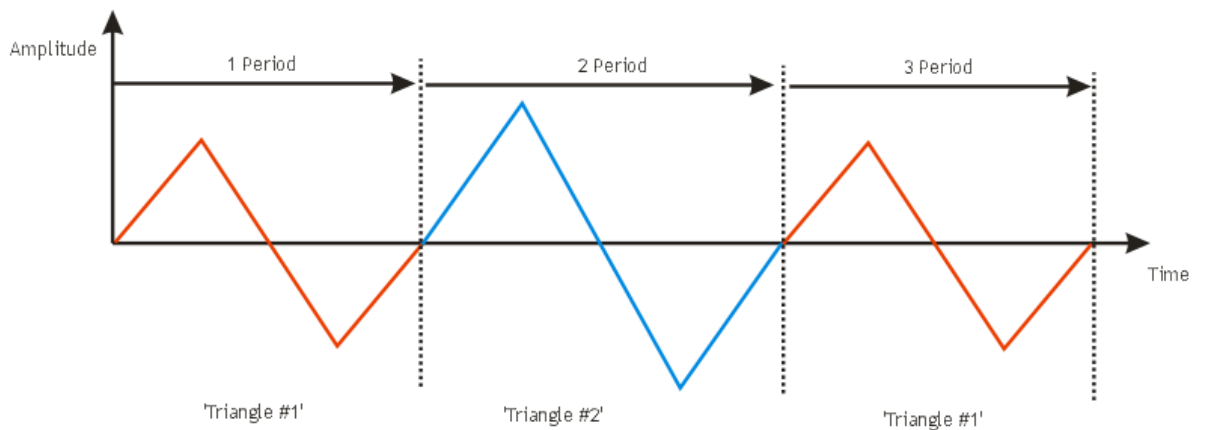

Dual Triangle Modulation Shape

2.3 Frequency Offset (DC Offset)

A frequency (DC) offset is an amount by which the average value of the periodic function is not centered around the x-axis.

A periodic signal has a DC offset component if it is not centered about the x-axis. In general, the DC value is the amount that must be subtracted from the signal to center it on the x-axis. by definition:

$$A_0 = \int_{-T/2}^{T/2} f(x) dx$$

With A_0 being the DC offset. If $A_0 = 0$, the function is centered and has no offset. This parameter is set using the SSCG_FOFFSET register.

3 Selecting the SSCG Operating Frequency

This depends on the physical application (your design).
We recommend an SSCG operating frequency of 20 kHz.

4 How to configure the SSCG Unit

4.1 SSCG Unit Default Values

The SSCG unit has the following default settings:

SSCG_PERIOD = 35 kHz

SSCG_PERIOD_JITTER = 0x90. Note the recommended value for use is 0x70!

SSCG_CTRL.SSCG_TYPE = 0x11 (Center spread)

Modulation Peak = +/- 1.5%

SSCG_FOFFSET = 0x0

SSCG_IEN = 0

4.2 Configuring the SSCG Registers

Using the Hardware Manual, select one of the tables which list the settings of the various SSCG registers.

Example

An operating frequency of 15 kHz is required for the SSCG and the PLL clock is running at 1.6 GHz. In the current Hardware manual, the relevant table is:

- Table 4-7 SSCG speed of 15KHz (refer to 1.6GHz PLL clock) – see below

Given that you have decided (for signal stability reasons) to use a Modulation Peak of 0 to $\pm 3\%$ and the default value for SSCG_PERIOD_JITTER (0x90), then read the following table this way:

SSCG_PEAK_FREQUENCY				0	1
SSCG_TYPE	SSCG_PERIOD	SSCG_PERIOD_DELTA	Modulation Peak %	SSCG_STEP	SSCG_STEP
3 Center Spread	0x1A0	0x14D	0.5	0x2DD4	0x16EA
			1.0	0x5BA8	0x2DD4
			1.5	0x897C	0x44BE
			2.0	0xB750	0x5BA8
			2.5	0xE524	0x7292
			3.0	0x1 12F8	0x897C
2 Upspread Not used with Ruby!	0x1A0	0x14D	0.5	0x16EA	0x0B75
			1.0	0x2DD4	0x16EA
			1.5	0x44BE	0x225F
			2.0	0x5BA8	0x2DD4
			2.5	0x7292	0x3949
			3.0	0x897C	0x44BE
1 Downspread	0x1A0	0x14D	0.5	0x16EA	0x0B75
			1.0	0x2DD4	0x16EA
			1.5	0x44BE	0x225F
			2.0	0x5BA8	0x2DD4
			2.5	0x7292	0x3949
			3.0	0x897C	0x44BE

For a center spread type and a Modulation Peak of 2.0%, use the following settings:

SSCG_TYPE = 0x11

SSCG_PERIOD = 0x1A0

SSCG_PERIOD_DELTA = 0x14D

SSCG_STEP = 0xB750

Please take note of the limitations listed in the Hardware Manual.

5 Enabling the SSCG Unit

It is important to follow an specific scheme to enable the SSCG unit in order to avoid causing a spike on the clock signal of the effected clock domains.

1. Switch the internal clock domains to the non-SSCG modulated clock domain, reset the SSCG and switch the display clocks to the non-SSCG modulated clock domain:
SSCG_CLKEN <0x3002_0004> = 0x00000000
2. Set the SSCG to Bypass mode and power down the SSCG:
SSCG_CTRL <0x3002_0028> = 0x80000133
3. Power up the SSCG and set to Bypass mode:
SSCG_CTRL <0x3002_0028> = 0x00000133
4. Configure the SSCG and wait for 1000 clock cycles before starting the SSCG
5. Disable the Bypass mode (enabling the SSCG unit):
SSCG_CTRL <0x3002_0028> = 0x00010133
6. Release the SSCG reset (digital part) using global control and switch the internal clock domains to the SSCG modulated clock domain:
SSCG_CLKEN <0x3002_0004> = 0x0000000C
7. Switch the display clock domains to the SSCG modulated clock domain:
SSCG_CLKEN <0x3002_0004> = 0x0000000F
8. Enable the SSCG:
SSCG_ENABLE <0x3002_002C> = 0x00000001
9. Wait for 1 millisecond
10. Reset the 'Frequency Limit' Interrupt:
SSCG_IEN.IEN_Frequency_Limit <0x3002_001C> = 0x00000001
11. Check that SSCG_STATUS.STS_FREQUENCY_LIMIT = 0

Note:

The SSCG parameter configuration can be done in steps 4 .. 7; otherwise the SSCG will run with the default settings of <0x3002_0004> = the content of address 0x3002_0004.

A more detailed flow is described in the Hardware Manual.

6 Checking the SSCG Unit is Operating

You can check that the SSCG unit is operating by reading the SSCG_CNTOUTFREQ register. It will return a value that is not '0' if the SSCG is running.

7 Important Notes during operation

Note that not every receiver can handle a modulated output signal. If problems (screen artefacts etc.) are experienced with a display, try reducing the degree of modulation to attain a range that the receiver can accept.

Make sure that the SSCG configuration is a valid one (i.e. the constraints of the Hardware Manual are taken into consideration). Failure to do this – i.e. an illegal configuration - may generate a flood of interrupts from the SSCG unit.

Do not reconfigure the SSCG unit while it is being used!

8 Disabling the SSCG Unit

It is important to follow an specific scheme to disable the SSCG unit in order to avoid causing a spike on the clock signal of the effected clock domains. Use the following programming sequence: (example)

1. Disable the SSCG:
SSCG_ENABLE <0x3002_002C> = 0x00000000
2. Set the SSCG to Bypass mode:
SSCG_ENABLE <0x3002_0028> = 0x00000133
3. Switch the internal clock domains to the non-SSCG modulated clock domain:
SSCG_CLKEN <0x3002_0004> = 0x00000007
4. Switch the display clock domains to the non-SSCG modulated clock domain:
SSCG_CLKEN <0x3002_0004> = 0x00000004
5. Set the SSCG to Bypass mode and power down the SSCG:
SSCG_CTRL <0x3002_0028> = 0x80000133
6. Reset the SSCG :
SSCG_CLKEN <0x3002_0004> = 0x00000000

A more detailed flow is described in the Hardware Manual.