2-7

VOBR BIDAR — IAF 11 JAN 25 — BIDAR, INDIA VOR Z RWY 20

BIDAR Tower	BIDAR Approach	ATIS
121.45, 123.5, VC	122.85, 119.6, VC	113.2

VOR BDR	FINAL Apch Crs	FAF	MDA(H)	Apt Elev 2182'
113.2	201°	D 5.7 BDR 3800'	2640' (458')	RWY 2180'


MISSED APCH : Climb STRAIGHT AHEAD to 3200', then climbing turn LEFT to join VOR hold at 4200' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 79 hPa	Trans level: By ATC	Trans alt: 7000'


3700'
MSA
BDR VOR

DME Required

Max IAS O/B 220 Kts.

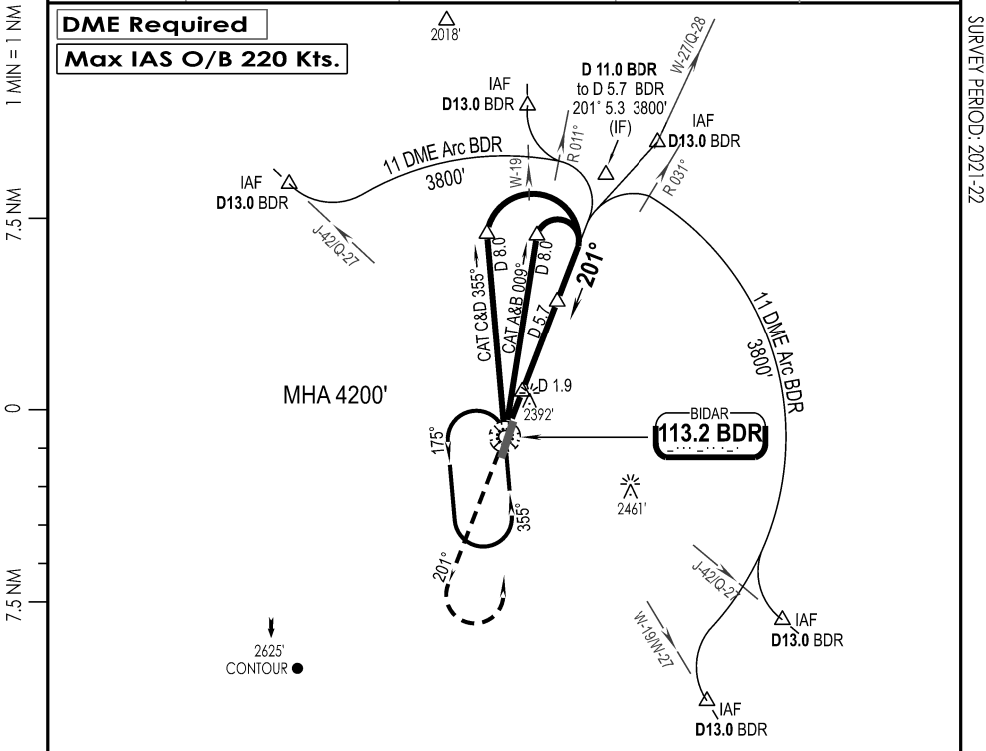

BDR DME	3.0	4.0	5.0	5.7		
ALTITUDE (ft)	2950	3260	3580	3800		

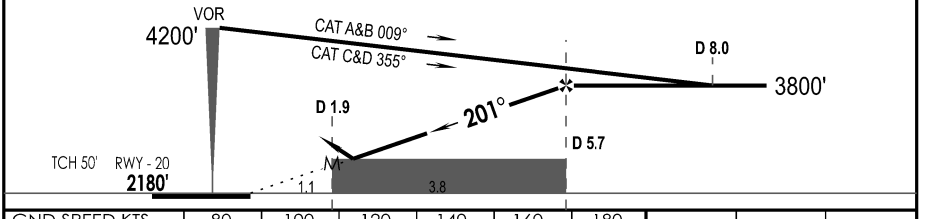

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3.0°	425	531	637	743	849	955

MAP AT D 1.9 BDR

NALS PAPI-R | 3200' | 4200' LT

STRAIGHT-IN LANDING RWY 20

MDA (H) **2640'** (458') — CDFA — NALS

A, B	RVR 1500m
C, D	RVR 2100m

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
100, 135	**2690'** (508')	2800m
180	**2790'** (608')	3200m
205	**2880'** (698')	3600m

CHANGES : NEW PROCEDURE

IPDC, DTE OF OPS (T & H)