1 – 1


VIJU IAF JAMMU, INDIA
JAMMU 03 SEP 26 CAT I ILS RWY 36

JAMMU Approach	JAMMU Tower	ATIS
-	122.85, 122.65, UC	122.9

VOR JJU	ILS IJMU	FINAL Apch Crs	FAP	DA (H)	Apt Elev 967'
113.3	110.1	355°	D 5.2 IJMU 2600'	As per table	RWY 952'

MISSED APCH : Climb STRAIGHT AHEAD to 2100', then climbing turn LEFT to join VOR hold at 4100' or as directed by ATC
Min Missed App Climb Gradient - 2.7%

Alt Set: hPa	Rwy Elev: 34 hPa	Trans level: By ATC	Trans alt:11000'



MSA
JJU VOR

1 Inch = 5.0 NM
5 NM
0
5 NM


SURVEY PERIOD : 2024-25

IB: NOT TO SCALE

1 MSA WITHIN 10Nm FROM R 270 to R 179 : 4100'

DME Required


WARNING
Aircraft to strictly maintain DME distance, timing & speed limits while carrying IAP due close proximity of IB.

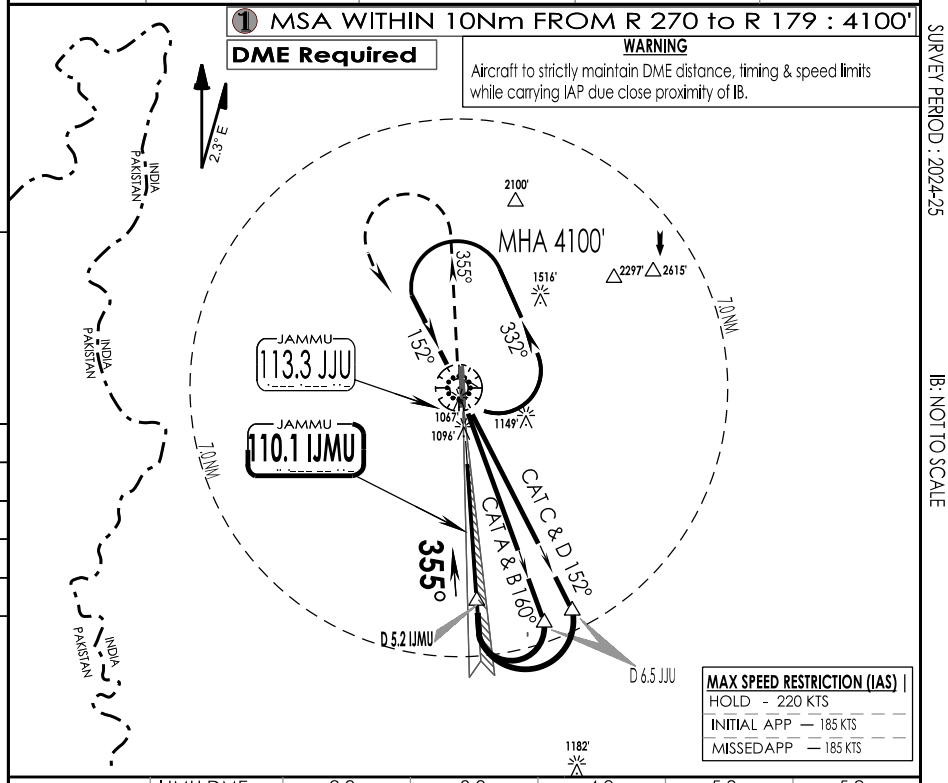

MAX SPEED RESTRICTION (IAS)

HOLD	220 KTS
INITIAL APP	185 KTS
MISSEDAPP	185 KTS

LOC(GS OUT)	IJMU DME	2.0	3.0	4.0	5.0	5.2
	ALTITUDE (ft)	1590	1900	2220	2540	2600

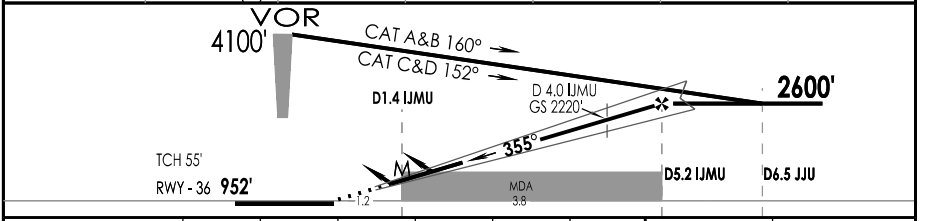

GND SPEED KTS	80	100	120	140	160	180
ILS GS or LOC DESCENT ANGLE 3.0°	425	531	637	743	849	955

2100' | 4100' LT

MAP AT D 1.4 IJMU

Std/State

STRAIGHT-IN LANDING RWY 36

MACG MIN 2.7% (164'/NM)
DA (H) ILS AB: **1258'** (306') CD: **1277'** (325')
LOC (GS OUT) CDFA MDA(H) **1400'** (448')

	FULL	ALS OUT	FULL	ALS OUT
A	RVR 700m	RVR 1400m	RVR 1400m	RVR 1500m
B				
C	RVR 800m	RVR 1500m		RVR 2100m
D				

CIRCLE - TO - LAND

CIRCLING OVER JAMMU TOWN NOT AUTHORISED

Max Kts	MDA (H)	VIS
100	**1490'** (523')	2800m
135	**1820'** (853')	4000m
180	**2430'** (1463')	5000m
205	**2970'** (2003')	

CHANGES : Warning

IPDC, DTE OF OPS (T & H)