one-stop partner for motors & motor drives designing and manufacturing

Tel: +86-18157453060 | Email: info@volcanomotor.com



Home About Us Products Solutions News FAQ Contact Us Feedback

Home > Products > Motor power-Brushless Motor > 1 HP Brushless DC Motor



2000rpm High Efficiency Brushless DC Motor

Model Number:	BLDC1.05-100
Type:	Brushless DC Motor
Output Power:	1.4HP
DC Voltage:	36V
Speed Range:	2000rpm
Poles:	4P, 6P, 8P


Detailed information


Brand Name:	Volcano Electric	Model Number:	BLDC1.05-100	Туре:	Brushless DC Motor
Output Power:	1.4 HP (1050W)	DC Voltage:	36V	Speed Range:	2000 RPM
Controller:	Customized, Optional	Braker:	Optional	Insulation Class:	Class B/F/H
Enclosure:	IP44/IP54	Poles:	4P, 6P, 8P	Wire:	100% copper
Housing:	Aluminum	Efficiency:	IE 4.0		
Duty:	S1 (continuous)	Place of Origin:	Zhejiang, China (Mainland)	Standard:	IEC standard or NEMA standard
Application:	Boat, Car, Electric Bicycle, Fa	an, Home Appliance	, Traction Motor, Solar Pump	DC systems, bus A/0	C systems ,Other

Product Description


Volcano Electric manufacture high efficiency Brushless DC Motors with torque in the range of 3.31N.M to 10.81N.M. Volcano Motors are available of any voltage between 24 V to 380 V and any speed between 500 RPM to 3000 RPM. Volcano motor can also custom design these motors for any other voltage and speed combination.

Configuration

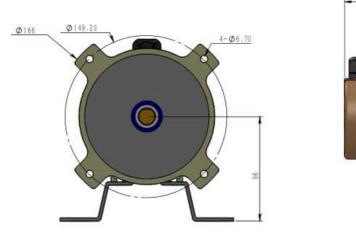

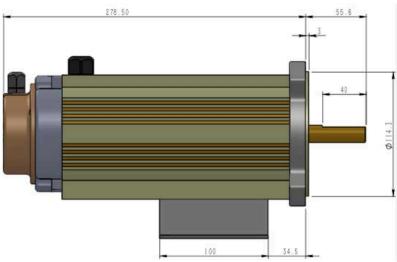

*CAN MAKE ACCORDING TO YOUR REQUIRMENT

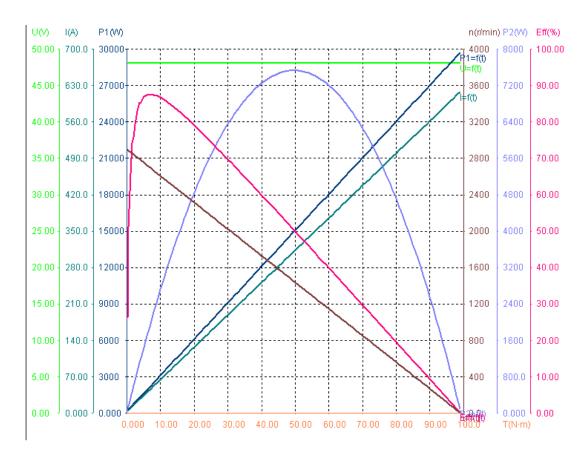

Model	Power Kw	Voltage V	Current A	Speed Rpm	Nominal torque N.m	Efficiency %	Noise dB
BLDC0.3-150	0.3	24V	14.7	1500	1.91	85	60
BLDC0.3-150	0.375	24V	18.4	2000	1.79	85	60
BLDC0.9-100	0.9	48V	22	2700	3.31	85	60
BLDC0.85-100	0.85	60V	16.7	1500	5.41	85	60

BLDC0.75-100	0.75	74V	11.9	1100	6.51	85	60
BLDC0.75-100	0.75	24V	36.7	2400	2.98	85	60
BLDC1-100	1	72V	16.3	1900	5.02	85	60
BLDC1-100	1	48V	24.5	2500	3.82	85	60
BLDC1.05-100	1.05	36V	34.3	2000	5.01	85	60
BLDC1.13-101	1.13	36V	36.9	1800	5.97	85	60
BLDC1.2-100	1.2	36V	39.2	2270	5.05	84	80
BLDC1.3-100	1.3	48V	31.8	3000	4.13	85	60
BLDC1.4-100	1.4	60V	27.5	2600	5.14	85	60
BLDC1.5-100	1.5	24V	73.5	2590	5.53	85	61
BLDC2-100	2	24V	98	3360	5.68	84.5	61.5
BLDC2.5-100	2.5	24V	122.5	3350	7.13	84.7	61.5
BLDC3-100	3	48V	73.5	2650	10.81	92.5	61

Advantages of Brushless DC motor:

- Brushless design for long life
- Simple setup and low maintenance
- Compact design
- Runs on 12-48 VDC
- Motors and drives are performance-matched sets
- · Optional gearheads availabl

For customized DC Motors, please contact our technician, Ordinary, we have to know the following information to get a professional proposal:

- Brushed or Brushless Customer preference
- Output power (W) Horsepower/watts/torque rated at full load speed
- Voltage (V) i.e 12v DC 220v AC
- Motor speed (RPM) Revolutions per minute of the shaft at full load Voltage
- Application e.g. traction, airconditioning, etc.
- Duty Most motors are rated continuous. Some applications however may use motors designed for intermittent duty
- **Configuration/Frame** Our products are according to IEC standard, we also can customize the flange and shaft according to the customer drawing
- Controller function e.g. forward/reverse, variable speed, acceleration profile, etc.


Previous 48V 1000W Brushless DC Motor Next 36V Brushless DC Motor Driver

You may like:





48V 1000W IP54 Brushless DC Motor Hall Sensor

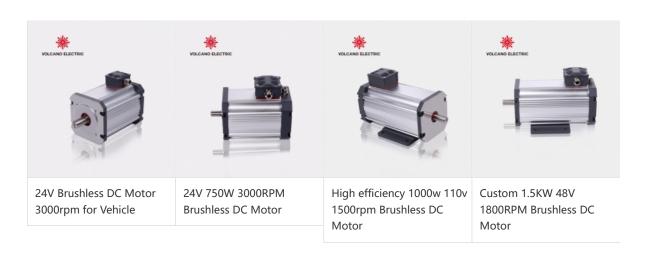

DC Motor Manufacturer & Supplier in China Email: info@volcanomotor.com | Tel: 86-18157453060

About Us Products Solutions Contact Us Feedback Search

Copyright © Ningbo volcanic electric co.,LTD