



I S S
INDIAN SAFETY SOLUTION
FIRE DOORS

ISO 9001 : 2015



📍 Hotel Amiras Compound,Ahmedabad - Mehsana Highway, Ta. Kalol, Dist. - Gandhinagar - 382729, Gujarat

✉️ indiansafety solution.com

🌐 www.indiansafety solution.com





I S S
INDIAN SAFETY SOLUTION

FIRE EXIT





ABOUT US



Surbhi Fire Doors are one of the Largest Supplier and Installer of Fire Doors in Indian Subcontinent. Surbhi Fire Doors Registered Office is in Rohini New Delhi and Operational Office in Gurgaon (Haryana). We Have over one Decade of Expertise. Hence, We Offers Steel Fire Doors, Wooden Fire Door, Glazed Fire Rated Doors, Clean Room Doors, Hollow Metal Pressed Steel Doors, Acoustic Doors, Shaft Doors, FHC Doors, Steel Louvered Doors, Lead Lined Doors and Automatic Sliding Doors to our Customers.

Makers of Surbhi Fire Doors are Committed to Provide Exceptional Services to Architects, Project Consultants, Interior Designers, Contractors, Builders and Individual Customers, We take Pride to Delivering Export Quality Fire Doors.

Because We Have :

Expertise in Fire Doors

Certified and Tested Fire Doors

High Quality Accessories

Acoustic Performance

Customized Solutions

Installation Solutions

OUR VISION

We Build Long Life Relationship Through Improving Performance in the Terms of Supply and Installations on Time. Project Completion to Predetermined Budgets and Quality Standards. This Vision is Supported by two Fundamental Principles that Provide the Foundation for All of our Activities : Organizational Excellence and Core Values.

OUR MISSION

Surbhi Fire Doors Mission is to be India's No. 1 Supplier and Installer of Commercial Doors, Specializing in Fire Acoustic and Service Life Performance. Using our Trusted Brand of Fire Doors, We aim to Develop Existing and new Product Lines that Market Around the Country.

OUR VALUES

We Achieve Goals by Working as a Team. We Seek Business Partners who Share the Same Vision, so that Together We Can Make a Real Difference. We are Experts in our Field. We Learn More by Always Asking Questions and Seeking Answers, Knowledge is the 'key' to Good Decision Making, Better Communication and to Being the Best We Can Be. We Adopt Sound Moral and Ethical Principles, Which Provide the Foundation to Long-Lasting Relationship Based on Honesty and Trust. We Provide Ourselves On the Quality of our Product and our Service. What We Do, We Do Well. We are Innovators and Lead the Way in Product Development and Testing Within our Field. We Lead By Example, with Respect for Others.

COMPANY

Surbhi Fire Doors Established by Mr. Ravinder Prashad, Who have Rich Experience in Sales and Marketing, Negotiations, Preparing Shop Drawings, Dispatch, Execution on Site, and Quality Checks, of Fire Doors. We have Sales and Marketing Team in Delhi/NCR, and Mumbai. We have Installations Team in Delhi/NCR, Ahmedabad, Mumbai, Pune and Chennai also. We Provide Supply and Installations Services to Entire Country. We also have the Expertise in Sales and Marketing in Delhi/NCR, Lucknow, Kolkata, Ahmedabad, Surat, Rajkot, Mumbai, Navi Mumbai, Pune, Bangalore, and Chennai.

WHY SURBHI FIRE DOORS

Surbhi Fire Doors” Stands as the Premier Choice for Fire Door Solutions in India. as the best Fire Doors Company in India, We Specialization in Fabricating Supplying, and Installing an Extensive Range of High-quality Fire Doors. We offer Highest Standards Fire Doors, Meeting With Testing Standard IS 3614 Part-II or BS 476 Part 20 & 22. Makers of Surbhi Fire Doors are Fully Committed to Quality, Fire Resistance, Acoustic Performance and Durability. We offer Powder Coated Doors with 60-70 Micron, According to RAL Colour Code. Infill Material will be Honney Comb, Mineral Wool and Rock Wool as Applicable in a Particular Door. We use Government Approved Brand Of Steel and Accessories. We Provide Single or Double Rebate Profile, Insulated or Uninsulated Doors on Same Cost. We have customized Solutions According to site or Client Requirements also.

OUR SERVICES

MANUFACTURING

At Surbhi Fire Doors, We have Specialization in Crafring High-Quality Fire Doors With Precision and Innovation. Our Advanced Manufacturing Facility Ensure Top-Notch Safety and Functionality, Trusted for Industry-Leading Solutions that Prioritize Your Security.

SUPPLY

Surbhi Fire Doors Company Excels in the Efficient Supply of High Quality Fire Doors. Seamlessly Meeting the Demands of Safety and Reliability.Our Streamlined Supply Chain Ensures Prompt Delivery of Top-Notch Products, Making Surbhi Fire Doors Your Trusted Partner for Premium Fire Resistance Solutions.

INSTALLATIONS

At Surbhi Fire Doors, our Commitment to Excellence Extends to Installations. We Ensure Seamless and Efficient Placement of our High Quality Fire Doors, Guaranteeing Optimal Safety and Security for your Spaces. Trust us for Expert Installations that Prioritize your Peace of Mind.

AFTER SALES & SERVICES

At Surbhi Fire Doors, our Commitment Extends Beyond Manufacturing Excellence to Unparalleled After Sales Sevices. We Provide Ourselves on Providing Prompt and Reliable Support. Ensuring the Ongoing Safety and Performance of our Fire Doors. Trust us for a Seamless Experience and Peace of Mind Long after your Purchase.





FIRE RATED STEEL DOOR

Surbhi Fire Doors are Designed to Compartmentalize and Contain the Spread of Fire Meeting the Most Stringent Requirements of Life Safety in Commercial, High Rise Residential, Warehouses, Hotels, Hospitals, Shopping Malls and other Industrial Establishments. Surbhi Fire Doors are Tested and Certified to Comply with Highest Indian (IS 3614 Part-2 or BS 476 Part 20 & 22) Standards. It is Available with Fire Rating 1hrs and 2hrs. These Doors not only Complement the Existing Passive Fire-Fighting Systems, but also Ensure Optimal Personal Safety.

Door Type	Fire Rating	Frame	Door Shutter
Fire Rated Steel Door	1Hrs/2Hrs	1.6MM Galvanized Steel	1.2MM Galvanized Steel
Door Thickness	Infill	Rebate Profile	Seal
46MM	Honney Comb-140 GSM Rock Wool-96KG/M'3	(1) 100MM X 57MM (2) 143MM X 57MM	Optional-Fire/ Smoke Seal 10X4MM
Bottom Seal	Criteria	Finish	Vision Panel
Optional-Automatic Door Bottom Drop Down Seal	Stability, Integrity and with Insulation	Powder Coated 60-70 Micron- RAL	Optional - Standard Size 200MM X 300MM
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	BS 476 Part 20 & 22 or IS 3614 Part-2	Customized Solutions	Panic Bar Systems





HMPS NON FIRE RATED DOORS

HMPS Non Fire Rated Doors can be Installed Where Fire Rating Doors are not Required. It is ideal for Office Entrance, Toilet, Bath Room of a Commercial Building, Hotels, Hospitals, Factories, Educational Institutes, IT Sectors and other Application area. These Doors are Low on Maintenance and High Aesthetics, HMPS Doors Manufactured with Highest Standards of Quality Parameters. These Eco-Friendly Doors have Developed a Reputation for Functionality and Long-Lasting Durability. These Doors Come in a Wide Range of Finishes Including Wooden Grain.

Door Type	Fire Rating	Frame	Door Shutter
HMPS-Non Fire Rated Door	Not Applicable	1.2MM Galavanised Steel	0.8MM Galcanised Steel
Door Thickness	Infill	Rebate Profile	Seal
46MM	Honney Com-140 GSM	(1) 100MM X 57MM (2) 143MM X 57MM	Not Required
Bottom Seal	Criteria	Finish	Vision Panel
Not Required	Not Applicable	Powder Coated 60-70 Micron-RAL	Optional - Non Fire Rated 5 MM Thick Clear Glass
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	Not Applicable	Customized Solutions	1. Mortise Dead Lock 2. Mortise Sash Lock





SHAFT DOORS

Plumbing Shaft Means an Enclosed Space for the Plumbing Lines and Services. Shaft is one of the Most Important Part of the Building that Keep the Essential Building Services Like Electrical Fire Etc. Services in Enclosed Area and Keep the Structure Good Exterior Looks. Plumbing Shaft, Electrical Shaft, LV Shaft Can be Provided Fire Rated and Non Fire Rated Both

Door Type	Fire Rating	Frame	Door Shutter
Fire Rated Steel Door	1Hrs/2Hrs	1.6MM Galvanized Steel	1.2MM Galvanized Steel
Door Thickness	Infill	Rebate Profile	Seal
46MM	Honney Comb-140 GSM Rock Wool-96KG/M'3	(1) 100MM X 57MM (2) 143MM X 57MM	Optional-Fire/ Smoke Seal 10X4MM
Bottom Seal	Criteria	Finish	Vision Panel
Optional-Automatic Door Bottom Drop Down Seal	Stability, Integrity and with Insulation	Powder Coated 60-70 Micron- RAL	Optional - Standard Size 200MM X 300MM
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	BS 476 Part 20 & 22 or IS 3614 Part-2	Customized Solutions	Allen Key Shaft Lock





CLEAN ROOM DOORS

Surbhi Presents a New Standard of Hygiene and Functionality for Clean Room Area in Commercial Establishments. We Called as Scientific Doors also. These Doors are ideal Choice for Pharmaceutical, Food Processing, Hospitals Computer Server Rooms, R&d Labs, Semiconductor and Electronic Industries. Made from Galvanized and Stainless Steel, These Flush Doors are Compact, Stable and Strong. Extremely Low in Maintenance. These Doors are Factory Finished with Range of Color and Specifications to Meet Various Clean Room Requirements. Clean Room Doors are Available with Interfacing Profile for a Flush and Easy Installation on Existing Walls.

Door Type	Fire Rating	Frame	Door Shutter
HMPS-Non Fire Rated Door	Not Applicable	1.2MM Galvanized Steel	0.8MM Galvanized Steel
Door Thickness	Infill	Rebate Profile	Seal
40/46MM	Honney Com-140 GSM	(1) 100MM X 57MM (2) 143MM X 57MM	Compulsary-EPDM Seal (Three Side Of Door Accept Bottom)
Bottom Seal	Criteria	Finish	Vision Panel
compulsary-Automatic Door Bottom Drop Down Seal	Not Applicable	Powder Coated 60-70 Micron-Ral	Compulsory - Standard Size 300mm X 300mm Non Fire Rated 5MM Double Glazed Unit
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	Not Applicable	Customized Solutions	1. Mortise Dead Lock 2. Mortise Sash Lock





FIRE RATED GLAZED DOORS

Fire-Rated Full Glazed Doors are Constructed of Materials that Work Together to Slow or Stop the Spread of Flames, Smoke, and in Certain Applications, Radiant and Conductive Heat Transfer, Common Materials include Fire-Rated Glass, Galvanized Steel, Wooden and Doors Offers a Finest Quality Fire Rated Glazed Doors in Customized Solutions. It is Available in 1hrs Fire Rating and 2Hrs Fire Rating both. Fire Rated Glazed Doors Criteria Should Be Stability, Integrity And With Insulation. Glazed Door are Mostly Used in Main Entry area of a Establishment.

Door Type	Fire Rating	Frame	Door Shutter
Glazed Steel Door	1Hrs/2Hrs	1.6MM Galvanized Steel	1.6MM Galvanized Steel
Door Thickness	Infill	Rebate Profile	Seal
50MM	Mineral Wool-96KG/M'3	143MM X 57MM	Optional - Fire/Smoke Seal-10X4MM
Bottom Seal	GLAZING	SHUTTER STILES	CRITERIA
Optional-Automatic Door Bottom Drop Down Seal	10mm/12mm/14mm-2Hrs Fire Rated Thick Clear Glass	Vertical & Top Members 50X100X1.6MM, Bottom Members 50X200X1.6MM	Stability, Integrity And With Insulation
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	BS 476 Part 20 & 22 OR IS 3614 Part-II	Customized Solutions	1. Mortise Dead Lock 2. Mortise Sash Lock





WOODEN FIRE DOORS

Surbhi Fire Doors Offers Fire Doors in Wooden Segments also. Wooden Fire Doors Mostly used in Hotels, Hospitals, Museum, Educational Institutions, Offices, and other Commercial & Industrial Establishments. Fire Smoke Seal, Laminates, Polishing and Insulations are the Most Important Parts of these Doors. Wooden Fire Doors Criteria Should be Stability, Integrity and with Insulation.

Door Type	Fire Rating	Frame	Door Shutter
Wooden Fire Door	1Hrs/2Hrs	Hardwood Marandi Teakwood/Ivory Coast	3mm Thick Commercial Ply or Veneer Ply on Both Side
Door Thickness	Insulation	Rebate Profile	Seal
50/55MM	Sandwich Type-Mineral Wool With Fire Rated Paint & Calcium Silicate Board	(1) 120MM X 70MM (2) 140MM X 70MM	Compalsaty- Intumescent Fire Smoke Seal (1) 10x4mm and 20x4mm
Bottom Seal	Polish	Vision Panel	CRITERIA
Optional-Automatic Door Bottom Drop Down Seal	Optional-Mellamine	Optional-Standard Size-200mm X 300mm	Stability, Integrity and with Insulation
Hardware	Testing Standard	Solutions	Locking Arrangement
According to BOQ	BS 476 Part 20 & 22 OR IS 3614 Part-2	Customized Solutions	1. Mortise Dead Lock 2. Mortise Sash Lock





FIRE RATED ACOUSTIC DOORS

Our Capacity of Work is Some Where Effectuated by the Noise Around us. It Always Disturb us While Working in Factories Production Units and Labs. Surbhi Fire Doors Offers Acoustic Doors to the Customers also. Acoustic Doors or Sound Proof Doors, Mostly Used in Movie Theater, Museum Auditorium, Operation Theater, R&D Labs, Offices and other Commercial Establishments. Surbhi Acoustic Doors Make a Major Contribution With Acoustic Value of up to 45DB.

Door Type	STC Rating	Fire Rating	Frame
Acoustic Door	up to 48DB	2Hrs	2MM Galvanized Steel
Door Shutter-Outside	Door Shutter-Inside	Door Thickness	Infill
2MM Galvanized Steel	1MM Galvanized Steel	65 to 77MM, According to STC Rating	Rock Wool, Density : 96KG/M'3
Rebate Profile	Seal	Bottom Seal	Criteria
143MM X 57MM	Compulsory Acoustic Perimeter Seal	Compulsory Automatic Door Bottom Drop Down Seal	Stability, Integrity and with Insulation
Testing Standard	Finish	Vision Panel	Hardware
BS 476 Part 20 & 22 or IS 3614 Part-II	Powder Coated 60-70 Micron- RAL	Optional DGU 30.52MM Thick Systems	According to BOQ
Solutions	Locking Arrangement		
Customized Solution	1. Mortise Dead Lock 2. Mortise Sash Lock		





LEAD LINED DOORS

Surbhi Fire Doors Offers a Premium Line of Lead Lined Metal that are Manufactured to have an Equal Appearance to Architectural Designed Doors and Frames. The Frames are Designed to Support the Lead Lined Doors to Provided a Lead Lined Interface Between the Door and the Lead Lined Wall in the Adjacent Walls. Usually they are Attached to Studs in the Walls Using a Variety of Techniques Specifically Designed to hold the Door Securely and Prevent Radiation Shielding Leakage. Lead Lined Doors Commonly Specified for X-Ray Protection in Aerospace, Airports, Defense Environments, Clinics, Hospitals Imaging Centers, Veterinary Offices, and other Healthcare Environments.

Door Type	STC Rating	Fire Rating	Frame
Lead Lined Door	Not Applicable	Not Applicable	1.2MM Galvanized Steel
Door Shutter	Door Thickness	Infill	Rebate Profile
1MM Galvanized Steel	46MM	Honney Comb-140 GSM, or Mineral Wool, Including 2MM Lead Sheet	100MM X 57MM
Seal	Bottom Seal	Criteria	Application
Optional - Fire/Smoke Seal-10X4MM	Optional Optional-Automatic Door Bottom Drop Down Seal	Radiation Protection	Atomic Research Centre, Nuclear Medicine, Radiology, Labs Etc,
Finish	Vision Panel	Hardware	Locking Arrangement
Powder Coated 60-70 Micron- RAL	Optional-Glazed Lead Glass	According to BOQ	1. Mortise Dead Lock 2. Mortise Sash Lock
Testing Standard			
AERB/DRS			





STEEL LOUVERED DOORS

Steel louvres are stronger than traditional lightweight aluminium louvred doors and panels. Louvered doors maintain air circulation, even when closed, keeping any mustiness at bay. Often used as bi-fold doors in small closets or sliding Steel doors are a popular choice for common bathroom or any commercial building where air circulation required.

Door Type	Fire Rating	Frame	Door Shutter
HMPS Non-Fire Rated Door	Not Applicable	1.2MM Galvanized Steel	0.8MM Galvanized Steel
Door Thickness	Rebate Profile	Bottom Seal	Seal
46MM	(1) 100MM X 57MM (2) 143MM X 57MM	Not Required	Not Required
Criteria	Finish	Vision Panel	INFILL
Not Applicable	Powder Coated 60-70 Micron - RAL	Optional	Honney Com-140 GSM
Locking Arrangement	Solutions	Louvered	Hardware
1. Mortise Dead Lock 2. Mortise Sash Lock	Customized Solutions	Customized-Standard Size 400MMX300MM	According to BOQ





FHC DOORS

FHC Stands for Fire Hose Cabinet and we Manufacture Doors Specific to this areas. It is Available with both Single and Double Door Features with 4MM Float Glass. These FHC Doors are Available in Different Sizes Shapes and Designs According to Customers Demands. We Provide FHC Doors in Double Skin with G.I.Sheet.

Door Type	Fire Rating	Frame	Door Shutter
HMPS Non-Fire Rated Door	Not Applicable	1.2MM Galvanized Steel	0.8MM Galvanized Steel
Door Thickness	Rebate Profile	Bottom Seal	Seal
46MM	(1) 100MM X 57MM (2) 143MM X 57MM	Not Required	Not Required
Criteria	Finish	Vision Panel	INFILL
Not Applicable	Powder Coated 60-70 Micron - RAL	Compulsory-4MM Float Glass	Honney Com-140 GSM
Locking Arrangement	Solutions	Material	Hardware
Allen Key Shaft Lock	Customized Solutions	G.I. Sheet Double Skin	According to BOQ





FIRE HOSE CABINET

The Wall Hydrant Cabinet Consist of the Following Fire Fighting Equipments, Angle, Valve, Fire Hose and Fire Nozzles with Bolt. These Equipment is Extremely Useful in the Event of a Fire in the Building you are in, and it is Very Important to know how to use it. The Cabinets for Fire Hose are the Compulsory Element of the Indoor Fire Fighting Public Water Supply Systems. The Cabinets are Designed for Accomodating, Protecting, Keeping and Storing the Fire Hoses, the Fire Hose Barrels and if Necessary the Fire Extinguishers.





AUTOMATIC SLIDING DOORS-INDUSTRIAL PURPOSE

A Sliding Door is a type of Door Which Opens Horizontally by Sliding, Usually Parallel to a Wall.

Automatic Sliding Doors are types of Doors that open and close Sensor Technology.

Automatic Sliding Doors are used Throughout Industrial and Commercial environments to Enable Quick Access to a Building. Sensors Used an Automatic Sliding Door are Motion Detectors or Optical Sensor. Its other Important Parts are Gear Motor, Belt, Pully Bottom Track and Breakout Switches Etc. Normally it is Available in 35-40MM Thickness.



DOOR OPENING STYLE

SINGLE LEAF DOOR- When you are entering outside to inside in the building



LHO



LHR



RHO




RHR

DOUBLE LEAF DOOR- When you are entering outside to inside in the building



LHA







LHRA



RHA



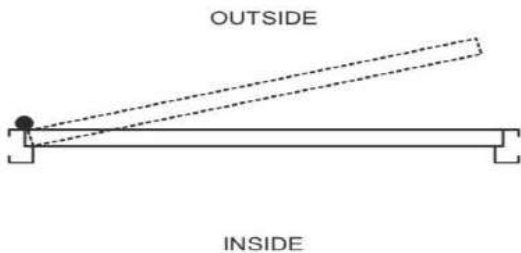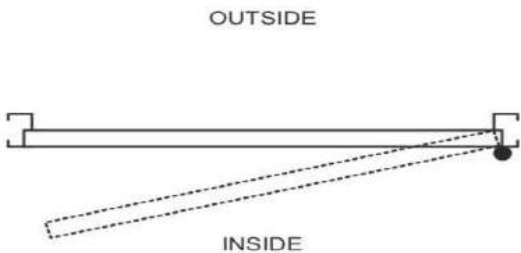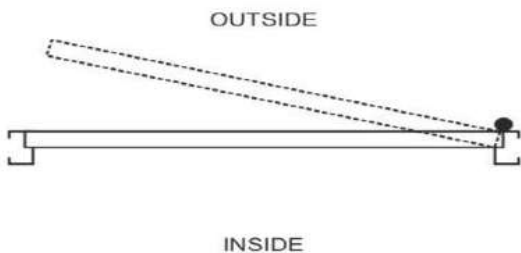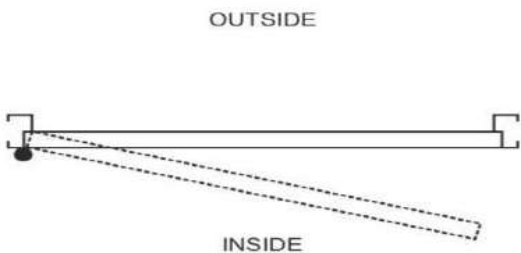RHRA

SINGLE SHUTTER DOOR			
RHO - (RIGHT HANDED - OUTSIDE OPEN)	F 1	RHI - (RIGHT HANDED - INSIDE OPEN)	F 2
			
LHO - (LEFT HANDED - OUTSIDE OPEN)	F 3	LHI - (LEFT HANDED - INSIDE OPEN)	F 4
			

RAL Colour Options

Epoxy Polyester Glossy Finish



BLACK
HG-9100



IVORY
HG-1100



IVORY (L)
HG-1101



CREAM WHITE
HG-1153



BROWN
HG-8100



BROWN SPL
HG-8101



SIEMENS GREY
HG-7100



WHITE
HG-1102



PINK
HG-3115



ORANGE
HG-2100



WILD LILAC
HG-4100




D.A. GREY
HG-7101



VIOLET
HG-4102



BLUE
HG-5100



HAVELLS GREY
HG-7102




IVORY SPL
HG-1103



BEIGE
HG-8102



BISCUIT
HG-8103



DESERT SAND
HG-1131



LIGHT GREEN
HG-6100



JASMINE YELLOW
HG-1105



COOL GREY N
HG-7103



MAROON
HG-3106



GOLDEN BROWN
HG-8105



COOL BLUE
HG-5102



ULTRA BLUE
HG-5101



BISCUIT YELLOW
HG-1120



RADIUM GREEN
HG-6101



PEACH
HG-3107



CLEAR
HG-1130



P.O. RED
HG-3100



CLASSIC WHITE
HG-1108



SIGNAL RED
HG-3101



DEEP BLUE
HG-5104



BRIGHT GREEN
HG-6102



PISTA GREEN
HG-6103



RUBINE PINK
HG-3109



BUS GREEN
HG-6104



BRILLIANT GREEN
HG-6105



MUNSAL GREY
HG-7104



OXFORD BLUE
HG-5105



GOLDEN YELLOW
HG-1110



NEW ORANGE
HG-2101



LIGHT GREY
HG-7105








POPPY RED
HG-3102

RAL Colour Options


Epoxy Polyester Glossy Finish

 NEW BROWN HG-8106	 HARDWARE BROWN HG-8107	 MAROON (S) HG-3110	 NATIONAL GREEN HG-6106	 MAINI YELLOW HG-1112
 LEMON YELLOW HG-1113	 STEELAGE GREY GREY HG-7108	 AVON GREEN HG-5109	 MID BUFF HG-8121	 WOOD YELLOW HG-1155
 SELTON BROWN HG-8108	 DARK YELLOW CLEAR HG-1157	 CHERRY HG-3105	 CREAM (V) HG-1107	
				

GLASSY P.P. COLOURS



 IVORY P.P. PG-1151	 WINE RED P.P. PG-3151	 SIGNAL RED P.P. PG-3152	 D.A. GREY P.P. PG-7151	 BLACK P.P. PG-9151
 L.G. GREY P.P. PG-7158	 MID BUFF P.P. PG-8156	 MOUNTAIN GREY P.P. PG-7153	 OFF WHITE P.P. PG-1156	 CLEAR P.P. PG-1165
 ONIDA GREY P.P. PG-7157	 FABRON GREY P.P. PG-7155	 IVORY 02 P.P. PG-1166	 LIGHT GREY P.P. PG-7152	 NEW ORANGE P.P. PG-2153
				

MATT P.P. COLORS

 GOLDEN BROWN P.P. PM-8251	 BISCUIT P.P. PM-8254	 Khari P.P. PM-8256	 J/N WHITE P.P. PM-1251	
---	--	---	---	---

RAL Colour Options

Epoxy Matt Finish

				
VIP BROWN HM-8200	NEW MATT BLACK HM-9200	SUPER MATT BLACK HM-9202	BC BROWN HM-8201	CLEAR HM-1205
				
MUNSHEL GREY HM-7200	D.A GREY HM-7201	V.I.P BLUE HM-5200	BEIGE BROWN HM-8202	AVON GREEN HM-6200
				
BROKEN WHITE HM-1200	IVORY HM-1201	GOLDEN BROWN HM-8203	J&N WHITE HM-1203	MISTY GREY HM-7202
				
DEAD MATT BLACK EM-9228	KHAKI HM-8221	GRAPHITE GREY (R) HM-7204	OLIVE GREEN HM-6201	SIGNAL RED HM-3200
				
YELLOW HM-1317	RED HM-3210	FAUZI GREEN (LF) HM-6202	AZURE BLUE (15-104) HM-5209	HINGIS BROWN HM-8206
				
MID BUFF HM-8207				

T.P.R. Finish





				
RED HK-3900	COBALT BLUE HK-5900	GREEN HK-6901	VIOLET HK-4900	PHIROZI HK-5901
				
YELLOW HK-1900	PURPLE HK-4901			
				

RAL Colour Options


Satin Finish

				
BLACK HS-9301	B. C. BROWN HS-8300	SIEMENS GREY HS-7300	BCH GREY HS-7301	SMOKE GREY HS-7311
				
ULTRA BLUE (N) HS-5300	TRAFFIC WHITE EP HS-1309			
				


Satin P.P. Finish

				
BEIGE BROWN P.P. PS-8352	BLACK P.P. PS-9351	9010 WHITE P.P. PS-1356	LIGHT BROWN P.P. PS-8353	COFFEE BROWN P.P. PS-8354
				
HONEY GOLD P.P. PS-8363	TRAFFIC WHITE P.P. PS-1358	CHOKO BROWN P.P. PS-8351	SIEMENS GREY P.P. PS-7351	HAVELL'S GREY P.P. PS-7354
				
ALX BLUE P.P. PS-5353	ALX BROWN P.P. PS-8358	BROWN P.P. PS-8359	SAND STONE P.P. PS-0366	BEIGE P.P. PS-8360
				
SILVER GREY P.P. PS-7353	NEW IVORY P.P. PS-1351	RED P.P. PS-3354	D.A GREY P.P. PS-7355	BRONZE-P.P. PS-8367
				
				


COMMON DESIGN




FLUSH




VISION LIGHT




RECTANGLE




NARROW LIGHT




HALF GLASS

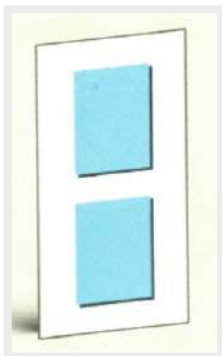


TWO HALF GLASS

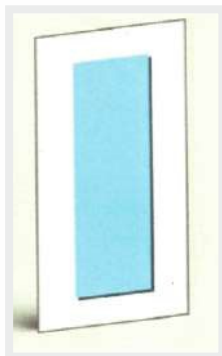


FULL GLASS

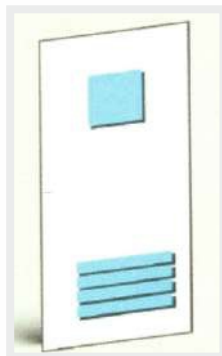

**VISION LIGHT
WITH LOUVERED**

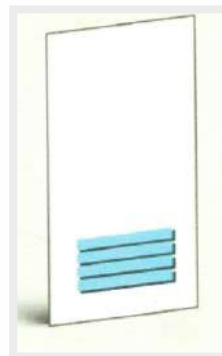


LOUVERED

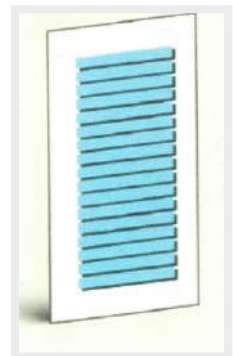

FULL LOUVERED

PRODUCT RANGE

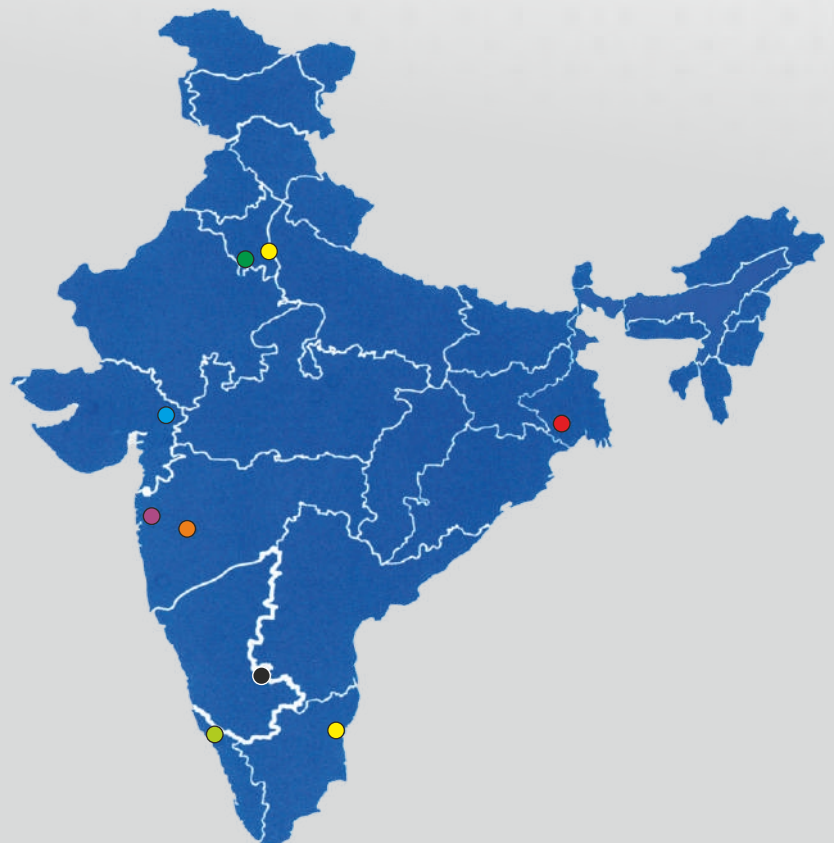1. Fire Rated Steel Doors
2. HMPS Non Fire Rated Doors
3. Shaft Doors
4. Clean Room Doors
5. Fire Rated Glazed Doors
6. Wooden Fire Doors
7. Fire Rated Accoustic Doors
8. Lead Lined Doors
9. Steel Louvered Doors
10. FHC Doors
11. Fire Hose Cabinet
12. Automatic Sliding Doors





ISO 9001 : 2015

OFFICE ADDRESS

● **Hotel Amiras Compound, Ahmedabad - Mehsana Highway, Ta. Kalol, Dist. - Gandhinagar - 382729, Gujarat**

● **indiansafetysolution.com**

● **www.indiansafetysolution.com**

● **+91 89 80 748 339**

